

2005
REND LAKE
WATER QUALITY
REPORT

U.S. ARMY CORPS OF ENGINEERS, ST. LOUIS DISTRICT
ENVIRONMENTAL QUALITY SECTION – WATER QUALITY

Table of Contents

Water Quality Report-Rend Lake

Section and Page No.

1.0 GENERAL OVERVIEW.....	pg. 1
2.0 WATER QUALITY ASSESSMENT CRITERIA	pg. 3
3.0 SUMMARY OF MONITORING RESULTS.....	pg. 7
4.0 PLANNED 2006 STUDIES	pg. 9

List of Figures & Tables

Figure 1: Lake Map.....	pg. 2
Table 2.1 State of Illinois - Water Quality Standards.....	pg. 3

Appendix

Appendix A: Data	pg. A1-A8
------------------------	-----------

Appendix B: Laboratory Data Graphs

Fecal Coliform	pg. B1
Metals (Iron & Manganese).....	pg. B2
Nitrogen (NH ₃ -N & NO ₃ -NO ₂).....	pg. B3
Orthophosphate & Total Phosphate	pg. B4
Chlorophyll & Pheophytin.....	pg. B5
Pesticides.....	pg. B6
TSS & VSS	pg. B7
TOC.....	pg. B8

Appendix C: Field Data Graphs

Temperature & DO	pg. C1-C14
pH.....	pg. C15-C19
Redox & Conductivity	pg. C20-C24
Secchi.....	pg. C25

WATER QUALITY MONITORING PROGRAM

1.0 GENERAL OVERVIEW

This report summarizes water quality activities of the St. Louis District for Fiscal Year 2005 in accordance with ER 1110-2-8154 Water Quality & Environmental management for Corps Civil Works Projects and ETL 1110-2-362 Environmental Engineering Initiatives for Water Management.

Water quality monitoring remains one of the Sections major responsibilities. The objective is to maintain a reasonable environmental monitoring program for the Mississippi River and the 5 lakes under the St. Louis District's control. The District's reservoirs consist of Mark Twain and Wappapello Lakes in Missouri, and Shelbyville, Carlyle and Rend Lakes in Illinois. Water quality sampling is conducted within the lakes and their tributaries to establish trend analysis and maintain water quality at or above state and federal regulations.

The main objective is to provide technical expertise of an environmental nature to all Corps elements requesting assistance in accordance with ER 1110-2-8154. This would include updating the water quality management priorities for the district's projects to ensure water quality meets the state and federal regulations, for protection of human health and the environment, and for the safety and economic welfare of those at Corps projects. Ongoing goals include ensuring that downstream water quality meets all state and federal regulations, is suitable for aquatic and human life, and continue to evaluate trend analysis in relation to baseline conditions at all projects.

1.1 INTRODUCTION

Rend Lake is within the Big Muddy River basin in south central Illinois. The lake serves as a heavy recreational usage lake and as a water supply to numerous communities. The land surrounding the lake is used predominately for agriculture. Surrounding communities have existing industrial/commercial operations and residents which discharge wastewater into municipal wastewater treatment plants which ultimately discharge treated water into the Big Muddy River basin. Agricultural and coal mine runoff and municipal wastewater treatment facilities are the primary potential source of pollution into the Rend Lake watershed. Additional sources are marinas, nearby subdivisions, industrial activities, recreational watercraft discharges and the golf course adjacent to the lake property.

Water quality monitoring was conducted during 1998 to assure the safe conditions for human recreation, wildlife and aquatic life was maintained and managed within the lake system. The 1998 water quality monitoring program began in April and continued through October. Monitoring was conducted every other month for a total of four sampling/analysis events. Nine sampling stations are sampled during each sampling event with one site chosen as a QA duplicate site. Carlyle Lake is within the Kaskaskia River Basin in central Illinois. The lake serves as a heavy recreational usage lake and supplies water to numerous communities. The land surrounding the lake is used predominately for agriculture. Surrounding communities have

existing industrial/commercial operations as well as residential communities which discharge wastewater into municipal wastewater treatment plants which ultimately discharge treated water into the Kaskaskia River Basin. Agricultural runoff and municipal wastewater treatment facilities are the primary potential source of pollution into the Carlyle Lake watershed. Additional sources are marinas, recreational watercraft discharges and effluent from nearby subdivisions and a golf course.

Water quality monitoring was conducted during 2005 to assure safe conditions for human recreation, wildlife and aquatic life as maintained and managed within the lake system. The 2005 water quality monitoring program began in February and continued through August. Monitoring was conducted on a monthly basis except in April. Six field data collection and 5 lab collection sampling events were conducted. During each sampling period one site was selected for quality control duplication and denoted as REN-15. The locations of the seven sampling sites are depicted on the lake map in Figure 1.

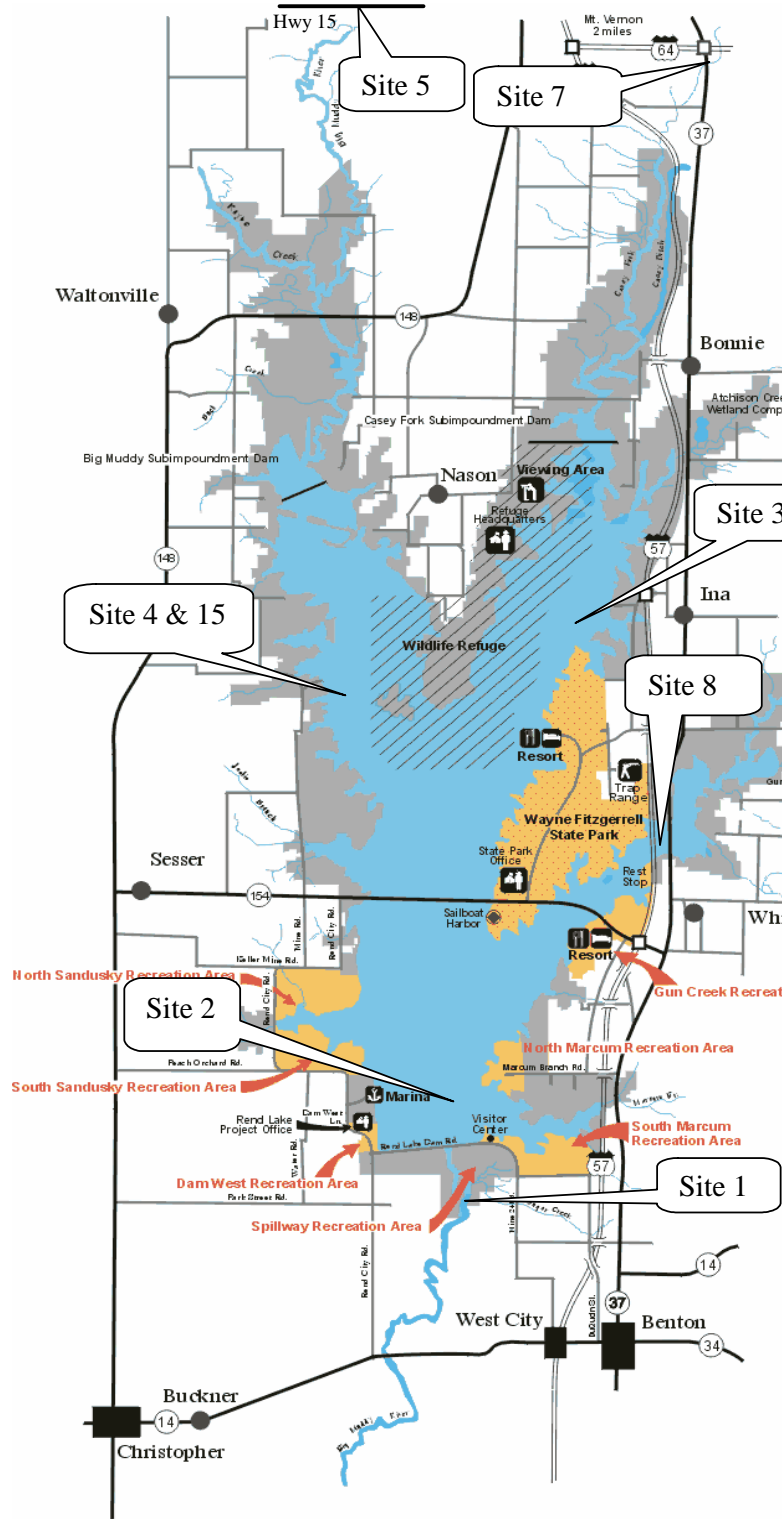


Figure 1
Location of sample sites

2.0 WATER QUALITY ASSESSMENT CRITERIA

The water quality assessment criteria were based upon the State of Illinois regulatory limits for certain contaminants, which has been generally accepted criteria for sustaining adequate aquatic plant and animal growth. The samplings and analysis which were conducted at the Rend Lake sites reflect the minimal set of parameters needed to analyze the current status of water quality for the Rend Lake system.

The following parameters were analyzed in the Fiscal Year 2005 samplings at Rend Lake: Total Organic Carbon (TOC), iron, manganese, ammonia-nitrogen, nitrate-nitrogen, orthophosphate, total phosphate, Total Suspended Solids (TSS), Total Volatile Suspended Solids (TVSS), fecal coliform, pH, temperature, dissolved oxygen, specific conductance, oxidation-reduction potential (ORP), chlorophyll, pheophytin-a, atrazine and alachlor,

The Illinois Environmental Protection Agency in Title 35, Subtitle, C, classifies water quality criteria based on end usage. Subpart B contains regulations for general use water, while subparts C and D delineate those for public and food processing water and secondary contact and indigenous aquatic life standards, respectively. These standards are used to determine the aquatic water quality of the lake. Table 2.1 provides a listing of the regulatory limits for the parameters analyzed where a limit has been established.

PARAMETER	LIMIT
Temperature	Rise < 2.8°C
Ammonia Nitrogen	< 15 mg/L
Nitrate Nitrogen	10 mg/L
Iron	2.0 mg/L
Manganese	1.0 mg/L
Phosphorous as Phosphate	0.05 mg/L
Fecal Coliform	< 200 colonies/100 ml
pH	Range: 6.5 to 9.0
DO	> 5.0 mg/L
Atrazine	0.003 mg/L (Drinking Water Standard)
Alachlor	0.002 mg/L (Drinking Water Standard)

Nitrogen is an essential component of proteins, genetic material, chlorophyll, and other key organic molecules. All organisms require nitrogen in order to survive. Nitrogen exists in several forms. These forms include gaseous nitrogen (N₂), nitrites (NO₂), nitrate (NO₃), ammonia nitrogen (NH₃-N), and ammonium (NH₄). Ammonia can be toxic to fish and other aquatic organisms at certain levels. Unlike ammonia, ammonium (NH₄) is not toxic to aquatic organisms and is readily available for uptake by plankton and macrophytes. Nitrogen levels have increased as human activities have accelerated the rate of fixed nitrogen being put into

circulation. High nitrogen levels can cause eutrophication. Eutrophication increases biomass of phytoplankton, decrease water transparency, and causes oxygen depletion. Ammonia nitrogen is monitored so that the effects on fish spawning, hatching, growth rate and pathologic changes in gills, liver and kidney tissue can be related to the detected levels of ammonia nitrogen. Nitrate-nitrogen degrades to nitrite or produces ammonia which has a detrimental effect on aquatic life and, therefore, has been monitored to assure levels are below the regulatory "safe" limit.

Phosphate has been analyzed as phosphorus and has been monitored due to the potential for uptake by nuisance algae. Levels of phosphate can indicate the potential for rapid growth of algae (algae bloom) which can cause serious oxygen depletion during the algae decay process. Phosphorous is typically the limiting nutrient in a water body. Therefore, addition of phosphorous to the ecosystem stimulates the growth of plants and algae. Phosphorous is delivered to lakes and streams by way of storm water runoff from agricultural fields, residential property, and construction sites. Other sources of phosphorous are anaerobic decomposition of organic matter, leaking sewer systems, waterfowl, and point source pollution. The general standard for phosphorous in lake water is 0.05mg/L. Dissolved phosphorous also called ortho-phosphorous is generally found in much smaller concentrations than total phosphorous and is readily available for uptake. For this reason dissolved phosphorous concentrations are variable and difficult to use as an indicator of nutrient availability.

The metals manganese and iron are nutrients for both plants and animals. Living organisms require trace amounts of metals. However, excessive amounts can be harmful to the organism. Heavy metals exist in surface waters in three forms, colloidal, particulate, and dissolved. Water chemistry determines the rate of adsorption and desorption of metals to and from sediment. Metals are desorbed from the sediment if the water experiences increases in salinity, decreases in redox potential, or decreases in pH. Metals in surface waters can be from natural or human sources. Currently human sources contribute more metals than natural sources. Metals levels in surface water may pose a health risk to humans and the environment.

Photosynthetic activity can be hindered by the levels of total suspended solids. Total suspended solids concentrations, which cause the photosynthetic activity to be reduced by more than 10% from the seasonably established norm, can have a detrimental effect on aquatic life. Soil particles, organic material, and other debris comprise suspended solids in the water column. Secchi disk measurements are inverse to suspended solid measurements. As the total suspended solids (TSS) increase, the secchi disk depth or water transparency decreases. Total suspended solids can be an important indicator of the type and degree of turbidity. TSS measurements represent a combination of organic (volatile) and inorganic (non-volatile) particles in the water. In order to more accurately determine the types and amounts of suspended solids, volatile suspended solids (VSS) are analyzed. VSS concentration represents the organic portion of the total suspended solids. Organic material often includes plankton and additional plant and animal debris that is present in water. Total volatile solids indicate the presence of organics in suspension and, therefore, show additional demand levels of oxygen.

Chlorophyll and pheophytin-a are monitored to provide indicators of algae growth and, therefore, potential oxygen depletion activity. Chlorophyll is measured in lakes to estimate the type and amount of algal productivity in the water column. Chlorophyll a is present in green

algae, blue-green algae, and in diatoms. Chlorophyll a is often used to indicate the degree of eutrophication. Chlorophyll b and c are used to estimate the extent of algal diversity and productivity. Chlorophyll b is common in green algae and is used as an auxiliary pigment for photosynthesis. Chlorophyll c is most common in diatom species and serves as an auxiliary pigment. Algal productivity and diversity can be determined by the concentrations of the individual pigments. For example high concentrations of chlorophyll a and b would indicate that green algae is abundant. High concentrations of chlorophyll a would indicate abundance of blue-green algae and concentrations of chlorophyll a and c would indicate diatoms are the dominant species. Chlorophyll production is currently being connected with hypoxia.

Fecal coliform bacteria is monitored for the protection of human health as it relates to full body contact of recreational waters. People can be exposed to disease-causing organisms, such as bacteria, viruses and protozoa in beach and recreational waters mainly through accidental ingestion of contaminated water or through skin contact. These organisms, called pathogens, usually come from the feces of humans and other warm-blooded animals. If taken into the body, pathogens can cause various illnesses and on rare occasions, even death. Waterborne illnesses include diseases resulting from bacteria infection such as cholera, salmonellosis, and gastroenteritis, viral infections such as hepatitis, gastroenteritis, and intestinal diseases, and protozoan infections such as ameobic dysentery and giardiasis. The most commonly monitored recreational water indicator organisms are fecal coliform, *Escherichia coli*, (*E. coli*) and enterococci. Fecal coliform are bacteria that live in the intestinal tracts of warm-blooded animals. The standard for fecal coliform is less than 200 colonies per 100ml of sample water. Fecal coliform was originally recommended in 1968 by the Federal Water Pollution Control Administration (predecessor to EPA) as an effective water quality indicator organism for recreational waters. Recent studies indicate that fecal coliform show less correlation to illness than other indicator organisms such as *E. coli* and enterococci. The Environmental Protection Agency (EPA) currently recommends *E. coli* or enterococci as an indicator organism for fresh waters. Although *E. coli* and enterococci are more costly they may become the standard in the near future.

Atrazine and Alachlor herbicides are commonly used agricultural chemicals which can be readily transported by rainfall runoff. Both compounds are suspected of causing cancer and, therefore, were monitored for the protection of human and aquatic health. Organic compounds include many pesticides. A pesticide can be any substance that is intended to prevent, destroy, repel, or mitigate any pest. This includes insecticides, herbicides, fungicides, fumigants, algaecides and other substances. Herbicides which are pesticides used to kill vegetation are the most widely used and sampled. Ten of the most frequently used herbicides and detected in water are Atrazine, Metolachlor, Alachlor, 2,4-D, Trifluralin, Glyphosate, Dicamba, Cyanazine, Simazine, and 2,4,5-T. Two of the most widely used pesticides are Atrazine and Alachlor. Atrazine is a preemergence or postemergence herbicide use to control broadleaf weeds and annual grasses. Atrazine is most commonly detected in ground and surface water due to its wide use, and its ability to persist in soil and move in water. Alachlor is a Restricted Use Pesticide (RUP) due to the potential to contaminate groundwater. The drinking water standard for Atrazine is 0.003mg/L and 0.002 mg/L for Alachlor.

Temperature, dissolved oxygen and pH are monitored for the protection of aquatic life.

Temperature is important because it controls several aspects of water quality. Colder water hold more dissolved oxygen which is required by aquatic organisms. Plants grow more rapidly and use more oxygen in warmer water. Decomposition of organic matter which uses oxygen is accelerated in warmer water. Temperature can also determine the availability of toxic compounds such as ammonia. Since aquatic organisms are cold blooded, water temperature regulates their metabolism and ability to survive. The number and kinds of organisms that are found in streams or lakes is directly related to temperature. Certain organisms require a specific temperature range, such as trout, which require water temperatures below 20°C. Most aquatic organisms require a minimum concentration of dissolved oxygen to survive. In spring, surface waters of the lake mix with the water below through wind and thermal action. This mixing diminishes as the upper layer of water becomes warmer and less dense. Solar insolation during the summer months stratifies the lake into three zones. The upper warmer water zone is called the epilimnion and the lower cooler water zone is called the hypolimnion. The epilimnion and the hypolimnion zones are divided by a transition zone known as the metalimnion. The thermocline located within the metalimnion exhibits a rapid change in water temperature. During the summer months the hypolimnion may become anaerobic. In this anaerobic zone, chemical reduction of iron and manganese, or the production of methane and sulfides can occur. Iron rapidly oxidizes in aerobic environments, but manganese oxidizes slowly and can remain in the reduced state for long distances down stream even in aerobic environments. The degree of acidity of water is measured by a logarithmic scale ranging from 0 to 14 and is known as the pH scale. A reading of 7 indicates neutrality and readings below seven are acidic and above are alkaline. Most Illinois lakes range from 6 to 9 on the pH scale. The buffering capacity of water is the ability to neutralize acid better known as alkalinity. A high alkalinity concentration indicates an increased ability to neutralize pH and resist changes, whereas a low alkalinity concentration indicates that a water body is vulnerable to changes in pH.

Conductivity is a measure of a water's ability to conduct an electrical current. The ability to carry a current is often driven by the dissolved materials present in a water column. These materials can include dissolved ions and other materials in the water and thus are directly proportional to the concentration of total dissolved solids (TDS) present in the water column. Typically TDS concentrations represent 50-60% of the conductivity measurements.

Redox or Oxidation-Reduction Potential (ORP) is a measurement to oxidize materials. Oxidation involves an exchange of electrons between 2 atoms. The atom that loses an electron is oxidized and the one that gains an electron is reduced. ORP sensors measure the electrochemical potential between the solution and a reference electrode. Readings are expressed in millivolts with positive readings indicating increased oxidizing potential and negative readings being increased reduction. The ORP probe is essentially a millivolt meter, measuring the voltage across 2 electrodes with the water in between.

Water clarity is intuitively used by the public to judge water quality. Secchi depth has been used for many years as a limnological characterization tool for characterizing water clarity. Secchi depth is a measure of light penetration into a waterbody and is a function of the absorption and scattering of light in the water. There are three characteristics of water which affect the penetration of light. The three factors are the color of water, amount of phytoplankton in the water column, and amount of inorganic material in the water column. Secchi depth integrates the combined impacts of all the factors which influence water clarity. Water

transparency was measured using a Secchi disk. Secchi disk readings were taken at all lake sites.

3.0 SUMMARY OF MONITORING RESULTS

The seasonal change brought on gradual lake stratification during the summer months. Fecal coli are sampled at the marinas to ensure that the marina areas are not being contaminated by boats with restroom facilities. Bacteria levels for all the marinas were below the Illinois standard of 200 colonies/100ml of sample water for the entire sampling period, February through September. The August sample at Dam West Marina was the only sample that approached the standard. The increase at this site may be attributed to the warm summer temperatures and the high usage of the facility.

Total iron and total manganese are sampled above the dam near the bottom of the channel (Ren-2-10) and in the spillway area (Ren-1). As was previously stated living organisms require trace amounts of metals, however excessive amounts can be harmful to the organism. Iron exceeded the Illinois Water Quality Standard at site Car-2-10 on May 17, 2005, but was well below the standard at site Car-1. Iron cycling is a function of oxidation-reduction processes. Dissolved oxygen levels at Car-2-10 on May 17, 2005 were low indicating that iron ions were released from the sediment into the water. This elevated level of iron near the bottom of the lake is not detrimental to the overall lake system at this time. Iron oxidizes relatively rapidly (minutes to hours); therefore any iron released through the spillway will be oxidized in a short period of time.

Nitrogen and phosphates are sampled at all sites. The 2005 phosphate results at all sites are above the 0.05 mg/L standard. Because phosphorous in water is not considered directly toxic to humans and animals no drinking water standards have been established for phosphorous. However, phosphorous can cause health threats through the stimulation of toxic algal blooms and the resulting oxygen depletion. However, nitrates can pose a threat to human and animal health. Nitrate in water is toxic at high levels and has been linked to toxic effects of livestock and to blue baby disease (methemoglobinemia) in infants. The Maximum Contaminant Level (MCL) for nitrate-N in drinking water is 10mg/L to protect babies 3 to 6 months of age. The Illinois Water Quality Standard for ammonia nitrogen (NH₃-N) is 15mg/L. The increased levels of phosphate in combination with nitrogen and other lake conditions, such as temperature, pH and stagnant lake conditions, can lead to increased algae growth. Eutrophication is currently the most widespread water quality problem in the U.S. and many other countries. Restoration of eutrophic waters requires the reduction of nonpoint inputs of phosphorous and nitrogen. The resulting detrimental effects of algae toxins and oxygen depletion could result in health problems for fish and other aquatic species as well as land animals utilizing the water supply. There were no signs of any of these effects throughout 2005.

Chlorophyll *a* was sampled at 3 sites, Car-2, Car-4, and Car-12. Chlorophyll *a* is a green pigment found in plants. Chlorophyll *a* concentrations are an indicator of phytoplankton abundance and biomass. They can be an effective measure of trophic status, and used as a measure of water quality. High levels often indicate poor water quality and low levels suggest good conditions. However, elevated levels are not necessarily bad. It is the long term persistence of elevated levels that is the problem. It is natural for chlorophyll *a* levels to

fluctuate over time. Chlorophyll *a* tends to be higher after storm events and during the summer months when water temperatures and light levels are elevated. Chlorophyll can reduce the clarity of the water and the amount of oxygen available to other organisms. Illinois does not currently have a standard for chlorophyll. The data indicates a normal increase in chlorophyll levels during the warmer summer months, which is not a concern.

Temperature and dissolved oxygen levels were taken at all sites. Measurements were taken at 1 meter intervals at the lake sites. During the summer months the lake stratifies and a boundary is formed between the upper warmer water and the lower cooler water. This transition area is known as the thermocline, the area where the temperature drops significantly. Oxygen levels can also change drastically as a function of depth. This area where the oxygen level significantly drops is called the oxycline. The depth of the thermocline and oxycline can have an effect on the aquatic organisms. Occasionally the thermocline and oxycline are at or near the same depth.

Atrazine and Alachlor are pesticides that were sampled at all sites. These chemicals are herbicides used to control weed growth. Atrazine exceeded the 3.0ug/L standard at Car-12 and had elevated levels at Car-9 on May 17. The Car-12 is located on the Kaskaskia River at the Cox Bridge access, and Car-9 is located at the Vandalia access, which is just south of Hwy 51. The Carlyle Lake watershed consists of approximately 75% cropland. These substances can enter water bodies as a result of drift during spraying, surface runoff, and leaching through soil. In order to eliminate pesticide contamination of waters it is important for the public to be educated and institute best manage practices when using these chemicals.

Total Suspended Solids (TSS) and Total Volatile Suspended Solids (TVSS) samples are collected at all sites. Solids can affect water quality by increasing temperature through the absorption of sunlight by the particles in the water, which also effects the clarity of the water. This can then effect the amount of oxygen in the water. Illinois does not currently have a standard for TSS or TVSS.

Total Organic Carbon (TOC) is collected at all sites. TOC is an indicator of the organic character of water. The larger the carbon or organic content, the more oxygen is consumed. The highest values for TOC occurred in August. This may be a result of plant material, which had grown all summer and begins to decay. Illinois does not currently have a standard for TOC.

pH is taken at all sites and at 1 meter intervals at lake sites. All sites were within the 6 to 9 pH range. Several site showed an increase in pH during the May 17 sampling. Variances in pH can be caused by a rainfall event.

Conductivity and redox are taken at all sites and at 1 meter intervals at lake sites. Illinois does not currently have a standard for conductivity or redox.

The monitoring program for Carlyle Lake during Fiscal Year 2005 revealed good water quality when compared to limits established by the Illinois Environmental Protection Agency (IEPA) for general use, secondary contact, and indigenous aquatic life. Agricultural nutrient runoffs were primary concerns for the lake's water quality. Better land management practices,

erosion control and buffering zones are methods used to reduce such contaminants from entering the lake. The St. Louis District personnel have been working continuously with lake personnel, area communities and other agencies in the implementation of educational programs and implementation planning to bring about the use of better management techniques to improve the lake's water quality.

4.0 PLANNED 2006 STUDIES

The Rend Lake water quality monitoring will continue in Fiscal Year 2006. A total of five sampling events will be conducted between February and September in 2006. Rend Lake provides water supplies to many communities and is a high usage recreational lake, The monitoring of water quality is imperative to assure the water quality is within acceptable limits for the designated usage.

The sampling plan will involve an intensive trend analysis of the contaminants entering Rend Lake. The sampling sites include the following: Site 1 Ren-1 Spillway, Site 2 Ren-02 Lake side in front of Dam, Site 3 Ren-3 Casey Fork Arm near Ina, Site 4 Ren-4 Big Muddy Arm, Site 5 Ren-5 Big Muddy at Hwy 15, Site 7 Ren-7, Casey Fork at Hwy 37, and Site 8 Ren-8, Gun Creek Arm. This combination of sites effectively represents the incoming contaminants and their effects on the lake.

APPENDIX A

DATA

SITE	DEPTH (m)	DATE	STIME	TOC (mg/L)	Total Fe (mg/L)	Total Mn (mg/L)	NH ₃ N (mg/L)	NO ₃ -NO ₂ (mg/L)	Ortho Phosphate (mg/L)	Total Phos (mg/L)	Total Suspended Solids (mg/L)	Total Volatile Suspended Solids (mg/L)
REN-1	0	2/24/2005	1407	6.4	0.63	0.12	0.05		0.02	0.01	0.12	13
REN-1	0	4/28/2005	1244	5.8	0.38	0.17	0.03	0.02	0.03	0.10	11	3
REN-1	0	5/26/2005	0917	5.3	0.40	0.21	0.23	0.06	0.02	0.11	44	5
REN-1	0	7/21/2005	1028	5.0	1.70	0.93	0.19	0.02	0.09	0.30	62	8
REN-1	0	9/1/2005	0948	5.6	0.84	0.47	0.20	0.33	0.14	0.29	46	6
REN-2-0	0	2/24/2005	1027	8.1			0.05		0.15	0.01	0.13	14
REN-2-0	0	4/28/2005	1019	7.7			0.03	0.02	0.02	0.10	9	3
REN-2-0	0	5/26/2005	1010	8.5			0.10	0.02	0.01	0.08	7	3
REN-2-0	0	7/21/2005	1132	6.6			0.05	0.04	0.06	0.15	11	7
REN-2-0	0	9/1/2005	1022	5.8			0.08	0.24	0.14	0.24	10	6
REN-2-5	5	2/24/2005	1033	6.1	0.73	0.13	0.03		0.02	0.01	0.13	81
REN-2-5	5	4/28/2005	1023	5.4	0.35	0.18	0.03	0.05	0.03	0.10	16	3
REN-2-5	5	5/26/2005	1015	5.0	0.33	0.76	0.13	0.04	0.04	0.11	11	3
REN-2-5	5	7/21/2005	1137	5.2	0.25	0.52	0.09	0.02	0.10	0.18	13	5
REN-2-5	5	9/1/2005	1027	5.5	0.32	0.99	0.21	0.29	0.20	0.30	11	4
REN-3	0	2/24/2005	1145	5.8			0.03		0.02	0.01	0.18	16
REN-3	0	4/28/2005	1130	5.0			0.03	0.02	0.02	0.15	22	4
REN-3	0	5/26/2005	1100	5.9			0.09	0.02	0.03	0.12	13	3
REN-3	0	7/21/2005	1207	8.9			0.06	0.04	0.11	0.28	28	14
REN-3	0	9/1/2005	1118	7.6			0.03	0.17	0.15	0.29	13	8
REN-4	0	2/24/2005	1206	5.8			0.03		0.02	0.01	0.18	16
REN-4	0	4/28/2005	1150	5.0			0.03	0.02	0.02	0.11	16	4
REN-4	0	5/26/2005	1115	6.3			0.11	0.02	0.03	0.13	12	4
REN-4	0	7/21/2005	1221	6.8			0.03	0.06	0.12	0.24	21	11
REN-4	0	9/1/2005	1137	6.0			0.03	0.23	0.18	0.29	14	6

SITE	DEPTH (m)	DATE	STIME	TOC (mg/L)	Total Fe (mg/L)	Total Mn (mg/L)	NH3N (mg/L)	NO3-NO2 (mg/L)	Ortho Phosphate (mg/L)	Total Phos (mg/L)	Total Suspended Solids (mg/L)	Total Volatile Suspended Solids (mg/L)
REN-5	0	2/24/2005	0926	5.0			0.04		0.14	0.02	0.08	11
REN-5	0	4/28/2005	0910	7.5			0.16	0.40	0.04	0.21	34	3
REN-5	0	5/26/2005	0834	6.4			0.20	0.04	0.04	0.16	21	2
REN-5	0	7/21/2005	0845	17.2			0.31	0.30	0.19	0.28	9	3
REN-5	0	9/1/2005	0850	8.1			0.35	0.98	0.11	0.34	17	3
REN-7	0	2/24/2005	1501	5.0			0.15		0.53	0.04	0.14	14
REN-7	0	4/28/2005	1340	7.2			0.03	0.41	0.04	0.24	36	3
REN-7	0	5/26/2005	1228	10.4			0.18	1130.00	0.03	0.22	24	3
REN-7	0	7/21/2005	0936	7.3			0.18	7.40	0.09	0.16	7	1
REN-7	0	9/1/2005	1225	6.4			0.15	3.60	0.08	0.20	21	3
REN-8	0	2/24/2005	1108	6.5			0.03		0.07	0.03	0.19	17
REN-8	0	4/28/2005	1058	7.3			0.03	0.02	0.01	0.09	13	5
REN-8	0	5/26/2005	1035	8.9			0.10	0.02	0.02	0.15	19	7
REN-8	0	7/21/2005	0954	9.2			0.03	0.51	0.12	0.38	32	13
REN-8	0	9/1/2005	1052	7.2			0.04	0.20	0.09	0.26	20	11
REN-15	0	2/24/2005	1210	7.6			0.03		0.02	0.02	0.18	16
REN-15	0	4/28/2005	1155	5.4			0.03	0.02	0.02	0.10	15	3
REN-15	0	5/26/2005	1122	5.6			0.10	0.02	0.03	0.13	12	3
REN-15	0	7/21/2005	1228	12.0			0.08	0.03	0.11	0.24	22	11
REN-15	0	9/1/2005	1143	5.3			0.03	0.15	0.18	0.30	14	5

SITE	DEPTH (m)	DATE	STIME	Chlorophyll	Pheophytin	Atrazine	Alachlor
REN-1	0	2/24/2005	1407	5			1.0
REN-1	0	4/28/2005	1244			1.0	1.0
REN-1	0	5/26/2005	0917			1.0	1.0
REN-1	0	7/21/2005	1028			1.0	1.0
REN-1	0	9/1/2005	0948			1.0	1.0
REN-2-0	0	2/24/2005	1027	4	25.8	6.0	1.0
REN-2-0	0	4/28/2005	1019	10.6	5.0	1.1	1.1
REN-2-0	0	5/26/2005	1010	5.0	5.0	1.1	1.1
REN-2-0	0	7/21/2005	1132	22.1	5.0	1.0	1.0
REN-2-0	0	9/1/2005	1022	29.2	8.4	1.0	1.0
REN-2-5	5	2/24/2005	1033	8			
REN-2-5	5	4/28/2005	1023				
REN-2-5	5	5/26/2005	1015				
REN-2-5	5	7/21/2005	1137				
REN-2-5	5	9/1/2005	1027				
REN-3	0	2/24/2005	1145	6	30.4	7.1	1.0
REN-3	0	4/28/2005	1130	10.2	5.0	1.1	1.1
REN-3	0	5/26/2005	1100	5.0	5.0	0.7	1.1
REN-3	0	7/21/2005	1207	36.2	5.4	1.0	1.0
REN-3	0	9/1/2005	1118	26.9	7.6	1.1	1.1
REN-4	0	2/24/2005	1206	4	38.5	6.5	1.1
REN-4	0	4/28/2005	1150	9.4	5.0	1.1	1.1
REN-4	0	5/26/2005	1115	5.8	5.0	1.1	1.1
REN-4	0	7/21/2005	1221	15.3	5.0	1.1	1.1
REN-4	0	9/1/2005	1137	23.9	6.8	1.0	1.0
REN-5	0	2/24/2005	0926	1			1.1
REN-5	0	4/28/2005	0910			5.3	1.1
REN-5	0	5/26/2005	0834			0.9	1.0
REN-5	0	7/21/2005	0845			1.0	1.0
REN-5	0	9/1/2005	0850			1.0	1.0

SITE	DEPTH (m)	DATE	STIME	Chlorophyll	Pheophytin	Atrazine	Alachlor	FECAL COL (colonies/100ml)
REN-7	0	2/24/2005	1501	2		-99.0	1.1	
REN-7	0	4/28/2005	1340			2.1	1.1	
REN-7	0	5/26/2005	1228			0.7	1.0	
REN-7	0	7/21/2005	0936			1.0	1.0	
REN-7	0	9/1/2005	1225			1.0	1.0	
REN-8	0	2/24/2005	1108	4	32.8	8.5	1.0	
REN-8	0	4/28/2005	1058	13.9	5.2	1.0	1.0	
REN-8	0	5/26/2005	1035	11.8	5.0	0.7	1.0	
REN-8	0	7/21/2005	0954	60.8	13.9	0.6	1.0	
REN-8	0	9/1/2005	1052	39.0	11.3	1.1	1.1	
REN-15-	0	2/24/2005	1210	4	45.4	8.2	1.0	
REN-15	0	4/28/2005	1155	10.5	5.0	1.0	1.0	
REN-15	0	5/26/2005	1122	6.2	5.0	1.5	1.0	
REN-15	0	7/21/2005	1228	30.3	5.0	1.3	1.3	
REN-15	0	9/1/2005	1143	20.6	9.5	1.1	1.1	
REN-RL-MAR	0	4/28/2005	1005					2
REN-RL MAR	0	5/26/2005	0930					4
REN-RL-MAR	0	7/21/2005	1123					16
REN-RL-MAR	0	9/1/2005	1008					100

Site	Date	Depth	H2OTemp	Redox	Cond	pH	DO %	D.O.(mg/L)	Time	Seechi (in)	Air Temp	Weather	Wind
1	2/24/2005	1.823	5.79	101.0	274.0	8.15	23.6	2.96	1407				
1	3/24/2005	1.1	7.80	300	305	8.00	126	15.0	1150		50 F		
1	4/28/2005	no entry	14.87	145.3	304	7.73	93.8	9.45			60 F	rain	
1	5/26/2005	0.75	21.23	225	348	7.98	97.4	8.48	9:17				
1	6/16/2005	0.475	24.6	121.9	405	8.00	121.5	10.0	10:34		82 F	Partly Cloudy	Light
1	7/21/2005	0.026	26.67	84.2	400	7.91	68.5	5.444	1028				
1	9/1/2005	0.356	25.19	126.1	331	6.70	73.0	6.00	948			Partly Cloudy	light
2	2/24/2005	1.260	5.27	106.5	276.0	8.07	15.5	1.97	1027	17			
2	2/24/2005	2.150	5.24	107.1	276.0	8.06	15.4	1.93	1027				
2	2/24/2005	3.160	5.24	107.1	275.0	8.05	15.4	1.96	1027				
2	2/24/2005	4.570	5.24	107.3	275.0	8.25	14.9	1.97	1027				
2	2/24/2005	5.800	5.25	107.5	276.0	8.06	15.6	1.98	1027				
2	2/24/2005	7.100	5.24	107.6	275.0	8.05	15.2	1.93	1027				
2	3/24/2005	1	7.77	297.6	307	8.00	115	13.7	935	23	45 F	Cloudy	Light
2	3/24/2005	2	7.74	300	306	8.00	115	13.7			45 F	Cloudy	Light
2	3/24/2005	3	7.70	301	306	7.90	114	13.7			45 F	Cloudy	Light
2	3/24/2005	4	7.70	303	306	7.90	114	13.6			45 F	Cloudy	Light
2	3/24/2005	5	7.72	304	306	7.90	114	13.6			45 F	Cloudy	Light
2	3/24/2005	6	7.70	305	306	7.90	114	13.6			45 F	Cloudy	Light
2	3/24/2005	7	7.70	305	306	7.90	114	13.6			45 F	Cloudy	Light
2	4/28/2005	1.1	14.9	154	303	7.6	91.4	9.20	10:19	30	60 F	rain	
2	4/28/2005	2.1	14.9	155.7	303	7.6	91.3	9.20	10:20		60 F	rain	
2	4/28/2005	3.2	14.9	156.2	303	7.6	91.4	9.2			60 F	rain	
2	4/28/2005	4.1	14.9	156.5	303	7.6	91.2	9.2			60 F	rain	
2	4/28/2005	5	14.9	156.9	303	7.6	91.3	9.2			60 F	rain	
2	4/28/2005	6.1	14.9	157.2	303	7.61	91.4	9.2			60 F	rain	
2	4/28/2005	7.1	14.9	157.3	302	7.6	91.0	9.17			60 F	rain	
2	5/26/2005	0.46	22.4	119	337	8.56	121.3	10.57	10:10	29			
2	5/26/2005	1.12	22.93	181.3	338	8.57	122.6	18.62					
2	5/26/2005	2.27	22.28	129.2	338	8.4	118.4	10.2					
2	5/26/2005	3.32	21.82	180.3	339	8.1	104.2	8.96					
2	5/26/2005	4.14	21.73	182.4	339	7.87	92.1	7.92					
2	5/26/2005	5.23	21.5	186	340	7.7	87.1	7.5					
2	5/26/2005	6.13	21.11	188.1	341	7.66	79.7	6.3					

Site	Date	Depth	H2OTemp	Redox	Cond	pH	DO %	D.O.(mg/L)	Time	Secchi (in)	Air Temp	Weather	Wind
2	5/26/2005	7.0	21.0	190.9	345	7.58	60.7	5.8					
2	6/16/2005	0.15	25.3	114.4	400	8.28	137.3	11.3	11:00	24	80 F	Partly Cloudy	Light
2	6/16/2005	1.15	25.0	114	400	8.19	130.0	10.65					
2	6/16/2005	2.1	24.89	116.3	400	8.1	123.1	10.1					
2	6/16/2005	3.0	24.8	119.2	400	8.0	118.5	9.8					
2	6/16/2005	4.0	24.7	121.1	400	7.95	116.4	9.66					
2	6/16/2005	5.1	24.6	124	400	7.88	111.3	9.24					
2	6/16/2005	6.1	24.6	125.9	399	7.85	109.3	9.1					
2	6/16/2005	6.8	24.4	130.7	434	7.8	31.8	2.65					
2	7/21/2005	0.28	28.68	17.0	316	9.0	116	9.0	1132	18			
2	7/21/2005	1.01	27.6	27.4	390	8.62	85.7	6.47	1134				
2	7/21/2005	2.0	22.0	60	390	8.26	56.8	4.15	1136				
2	7/21/2005	3.1	26.85	54.4	389	8.1	40.5	3.17	1137				
2	7/21/2005	4.1	26.73	65.4	389	7.97	33.9	2.68	1138				
2	7/21/2005	5.0	26.68	60.4	389	7.89	33.0	2.68	1138				
2	7/21/2005	6.1	26.48	64.7	391	7.81	29.7	2.37	1139				
2	9/1/2005	1.01	26.44	88.4	310	7.47	84.8	6.8	1022	18		Partly Cloudy	light
2	9/1/2005	2.2	26.43	85.3	320	7.62	82.0	6.6	1023			Partly Cloudy	light
2	9/1/2005	3.1	27.39	85.6	320	7.66	77.3	6.22	1024			Partly Cloudy	light
2	9/1/2005	4.0	26.39	90.4	321	7.58	60.6	4.9	1025			Partly Cloudy	light
2	9/1/2005	5.0	26.2	100	322	7.45	32.8	2.6	1026			Partly Cloudy	light
2	9/1/2005	6.1	25.95	103.6	324	7.63	29.9	1.9	1026			Partly Cloudy	light
3	2/24/2005	0.530	5.66	105.8	261.0	8.11	19.5	2.46	1145	14			
3	2/24/2005	1.420	5.66	107.6	260.0	8.08	22.0	2.85	1145				
3	2/24/2005	2.890	5.63	128.4	260.0	8.05	22.7	2.84	1145				
3	2/24/2005	3.930	5.58	109.1	260.0	8.02	21.8	2.76	1145				
3	2/24/2005	5.100	5.57	109.6	260.0	8.01	22.7	2.87	1145				
3	3/24/2005	1	7.70	302	307	8.00	119	14.0	1048	18	50 F	Cloudy	Light
3	3/24/2005	2	7.70	303	306	8.00	115	13.6					
3	3/24/2005	3	7.70	304	306	7.90	113	13.5					
3	3/24/2005	4	7.70	305	306	7.90	112	13.0					
3	3/24/2005	4.8	7.70	306	306	7.90	112	13.0					
3	4/28/2005	1.2	14.6	155	332	7.68	91.0	9.25	11:30	24	60 F	rain	
3	4/28/2005	2.4	14.60	157.0	331	7.68	91.7	9.22			60 F	rain	
3	4/28/2005	3.5	14.61	158.0	331	7.67	91.3	9.28			60 F	rain	

Site	Date	Depth	H2OTemp	Redox	Cond	pH	DO %	D.O.(mg/L)	Time	Secchi (in)	Air Temp	Weather	Wind
3	4/28/2005	4.2	14.61	158.2	332	7.64	91.0	9.23			60 F	rain	
3	4/28/2005	5.2	14.61	158.0	332	7.62	90.0	9.14			60 F	rain	
3	5/26/2005	0.53	92.1	180	369	7.9	110	9.07	11:00				
3	5/26/2005	1.25	21.9	180.9	369	7.9	1058	9.22	11:00				
3	5/26/2005	2.15	21.8	179.9	367	7.9	1026	8.96					
3	5/26/2005	3.05	21.7	179.8	367	7.79	98.7	8.63		16			
3	6/16/2005	0.25	25.8	103.5	437	8.5	135.5	10.9	11:43	19	78 F	Partly Cloudy	Light
3	6/16/2005	1.1	25.6	97.6	436	8.5	133	10.7					
3	6/16/2005	2.1	25.4	99.3	437	8.37	118.6	9.7					
3	6/16/2005	3.1	25.3	101.8	444	8.24	71.6	5.9					
3	7/21/2005	0.3	30.73	18	406	9.18	100.6	8.0	1207	9			
3	7/21/2005	1.1	30.0	20.5	406	9.1	93.4	7.0	1208				
3	7/21/2005	2.1	28.5	28.0	408	8.88	75.6	5.6	1209				
3	7/21/2005	3.1	29.0	36.0	410	8.7	59.2	4.5	1210				
3	7/21/2005	4.1	28.5	56.0	415	8.37	32.7	2.3	1210				
3	9/1/2005	0.5	26.57	53.0	324	8.29	126.1	10.1	1118	12			
3	9/1/2005	1.2	26.46	54	324	8.34	124.6	9.97	1119				
3	9/1/2005	2.1	26.26	58	324	8.28	116.7	9.22	1119				
3	9/1/2005	2.9	25.60	71.7	327	8.0	76.4	6.75	1120				
4	2/24/2005	0.400	5.66	110.0	288.0	8.19	41.1	4.88	1206	12			
4	2/24/2005	1.400	5.68	109.2	288.0	8.15	41.1	5.81	1206				
4	2/24/2005	2.090	5.68	108.4	287.0	8.18	34.2	4.31	1206				
4	2/24/2005	3.680	5.69	108.4	287.0	8.17	33.4	4.20	1206				
4	3/24/2005	1	7.80	313	308	8.00	116	13.8	1113	14			
4	3/24/2005	2	7.80	315	308	7.90	114	13.0					
4	3/24/2005	3	7.80	315	308	7.90	113	13.0					
4	3/24/2005	3.7	7.70	315	306	7.80	99	12.0					
4	4/28/2005	1.3	14.39	155.1	323	7.76	96.2	9.81	11:50	30	60 F	rain	
4	4/28/2005	2.2	14.37	156.5	322	7.75	94.9	9.69	12:44		60 F	rain	
4	4/28/2005	3.1	14.37	157.3	323	7.73	94.7	9.67	13:40		60 F	rain	
4	5/26/2005	0.5	23.2	171.2	388	8.1	116.9	9.94	11:15	22			
4	5/26/2005	1.2	23.2	169.6	388	8.1	119.8	9.8					
4	5/26/2005	2.1	23	168.8	388	8	113.1	9.64					
4	5/26/2005	3.1	22.4	167.9	386	7.8	92.7	9.0					
4	6/16/2005	0.3	26.1	104	428	8.5	150	12.3	12:01	20	75 F		


Site	Date	Depth	H2OTemp	Redox	Cond	pH	DO %	D.O.(mg/L)	Time	Secchi (in)	Air Temp	Weather	Wind
4	6/16/2005	1.0	25.7	99.8	430	8.4	146	11.7					
4	6/16/2005	2.0	25.4	103.8	430	8.2	126.9	10.3					
4	6/16/2005	3.0	25.4	106.4	430	8.1	119.6	9.7					
4	7/21/2005	0.2	30.2	12.9	411	9.18	122.0	98.2	12:24	10			
4	7/21/2005	28.8	29.2	18.0	414	9.1	102.2	7.8	1226				
4	7/21/2005	2.0	28.8	24.5	417	8.88	85.2	6.4	1227				
4	7/21/2005	3.0	27.9	-34.5	447	7.9	26.5	1.6	1228				
4	9/1/2005	0.4	25.70	62.2	330	7.78	82.5	7.12	1137	14			
4	9/1/2005	1.2	25.65	62.9	330	7.79	80.4	6.95	1137				
4	9/1/2005	2.1	25.52	65	330	7.77	81	6.63	1138				
4	9/1/2005	2.8	25.40	68	238	7.73	74	6.0	1139				
5	2/24/2005	0.784	4.19	114.0	715.0	7.69	61.6	7.99	926				
5	3/24/2005	0.4	7.00	322	410	7.70	121	14.0			50 F		
5	4/28/2005	0.665	12.33	168.2	670	7.21	77.8	8.30			60 F	drizzle/cloudy	
5	5/26/2005	0.812	18.6	215.2	103.7	7.64	67.7	5.82	8:34				
5	6/16/2005	0.57	22.7	145.5	1342	7.5	68.9	5.81	9:15		78 F	Partly Cloudy	Light
5	7/21/2005	0.398	26.66	100.5	801	7.78	27.2	2.12	845		80 F	Clear	Light
5	9/1/2005	0.45	21.95	169.3	299	6.42	44.1	3.71	850		75	Partly Cloudy	light
7	2/24/2005	0.782	5.67	112.6	562.0	7.87	16.4	2.86	1501				
7	3/24/2005	1.29	6.33	242	381	8.00	110	13.5	856		50 F	Cloudy	Light
7	4/28/2005	0.426	12.06	155.5	545	7.34	90.9	9.76					
7	5/26/2005	0.719	18.79	134	867	7.64	78.6	7.3	12:28				
7	6/16/2005	0.46	22.4	130.1	888	7.65	85.8	7.0	9:50		74 F	Partly Cloudy	Light
7	7/21/2005	0.51	26.78	90.4	903	7.87	55.5	4.39	936			Clear	Light
7	9/1/2005	0.54	22.87	95.4	555	7.13	89.7	7.46	1225				
8	2/24/2005	0.325	6.28	108.6	237.0	8.00	29.4	3.68	1108	13			
8	2/24/2005	1.970	5.24	110.7	238.0	7.90	28.9	3.58	1108				
8	2/24/2005	2.590	6.22	112.2	241.0	7.87	27.0	3.49	1108				
8	2/24/2005	3.860	6.23	113.7	238.0	7.85	26.6	3.32	1108				
8	3/24/2005	1	8.50	291	299	7.80	110	13.0	1017	12	47 F	Cloudy	Light
8	3/24/2005	2	8.50	292	299	7.80	105	12.3			47 F	Cloudy	Light
8	3/24/2005	3	8.50	292	299	7.80	104	12.0			47 F	Cloudy	Light

Site	Date	Depth	H2OTemp	Redox	Cond	pH	DO %	D.O.(mg/L)	Time	Secchi (in)	Air Temp	Weather	Wind
8	3/24/2005	4	8.50	292	299	7.80	103	12.0			47 F	Cloudy	Light
8	3/24/2005	5	8.50	292	299	7.70	90	10.0			47 F	Cloudy	Light
8	4/28/2005	1.2	15.3	147.5	315	8.13	99.7	9.98	10:58	27	60 F	rain	
8	4/28/2005	2	15.3	147.3	314	8.13	100.4	10.05			60 F	rain	
8	4/28/2005	3.2	15.27	147.3	314	8.06	99.0	9.92			60 F	rain	
8	4/28/2005	4.1	15.23	147.8	315	7.99	97.0	9.71			60 F	rain	
8	5/26/2005	0.44	22.5	182.8	344	7.9	99.5	8.5		13			
8	5/26/2005	1.22	22.6	182.6	344	7.9	94.4	8.1					
8	5/26/2005	2.09	25.5	182.5	344	7.8	91.7	7.89					
8	5/26/2005	3.15	22.39	182.5	344	7.7	76.0	6.59					
8	5/26/2005	4.07	22.27	182.5	342	7.6	62.7	5.4	10:40				
8	6/16/2005	0.24	24.6	111.8	405	8.37	134.2	10.72		17			
8	6/16/2005	1.05	26.59	107	404	8.34	127.7	10.0					
8	6/16/2005	2.2	24.4	108.8	401	8.15	113.1	8.9					
8	6/16/2005	3.07	26.4	111.5	402	8.08	107.3	8.63					
8	6/16/2005	4.02	26.4	114.2	407	7.9	84.7	6.8					
8	7/21/2005	0.358	30.69	64.7	392	8.43	77.9	5.8	954	12		Clear	Light
8	7/21/2005	1	30.48	63.2	392	8.4	69.1	5.17					
8	7/21/2005	2	30.20	65.7	392	8.32	6.05	4.55					
8	7/21/2005	3	30.14	63.5	392	8.21	57.2	4.31					
8	9/1/2005	0.3	26.73	44.8	290	7.9	113.3	9.04	1052	14		Partly Cloudy	
8	9/1/2005	1.2	26.7	48.6	290	8.0	110.6	8.85	1053				
8	9/1/2005	2.05	26.6	52.1	288	8.0	106.9	8.5	1054				
8	9/1/2005	3.0	25.8	65.8	235	7.56	36	2.9	1054				


APPENDIX B

LAB DATA GRAPHS


FECAL COLIFORM Rend Lake Marina

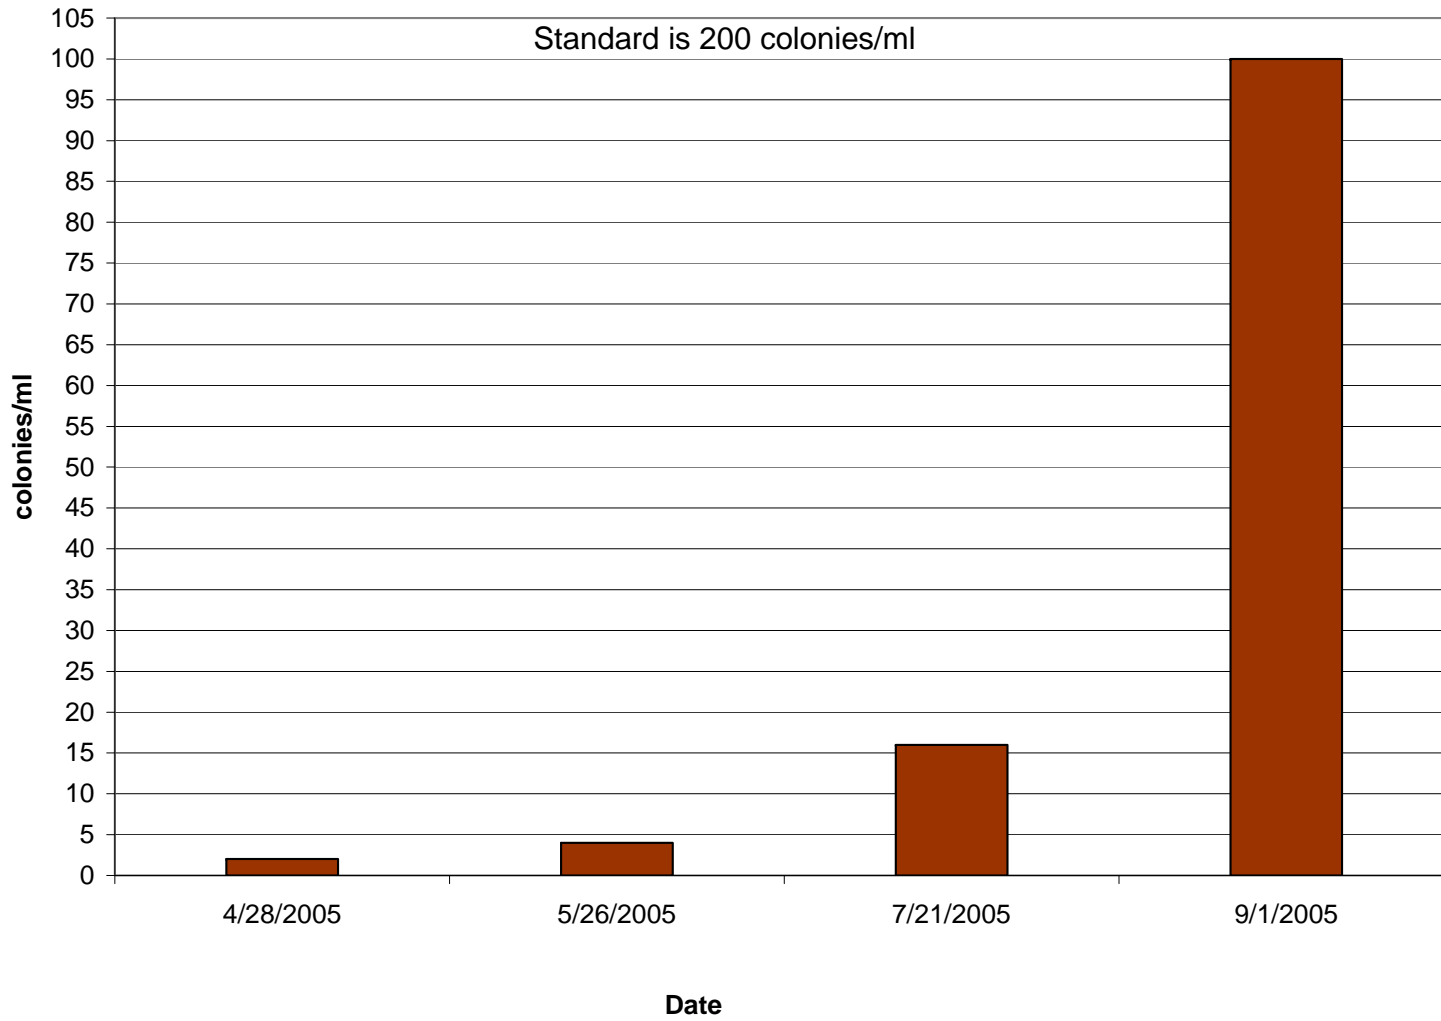


Metals

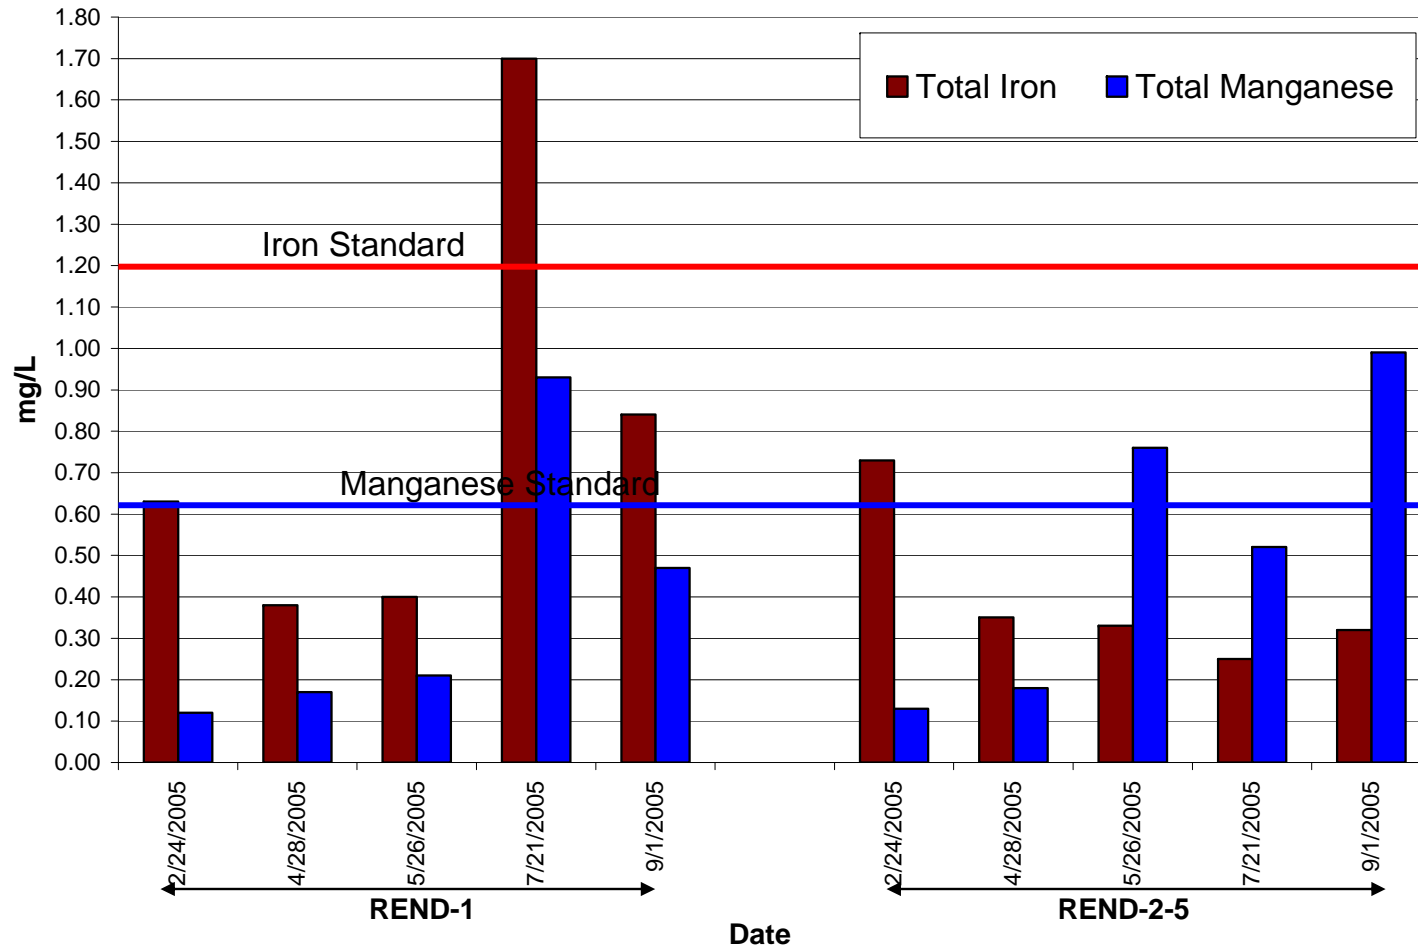


Nitrogen

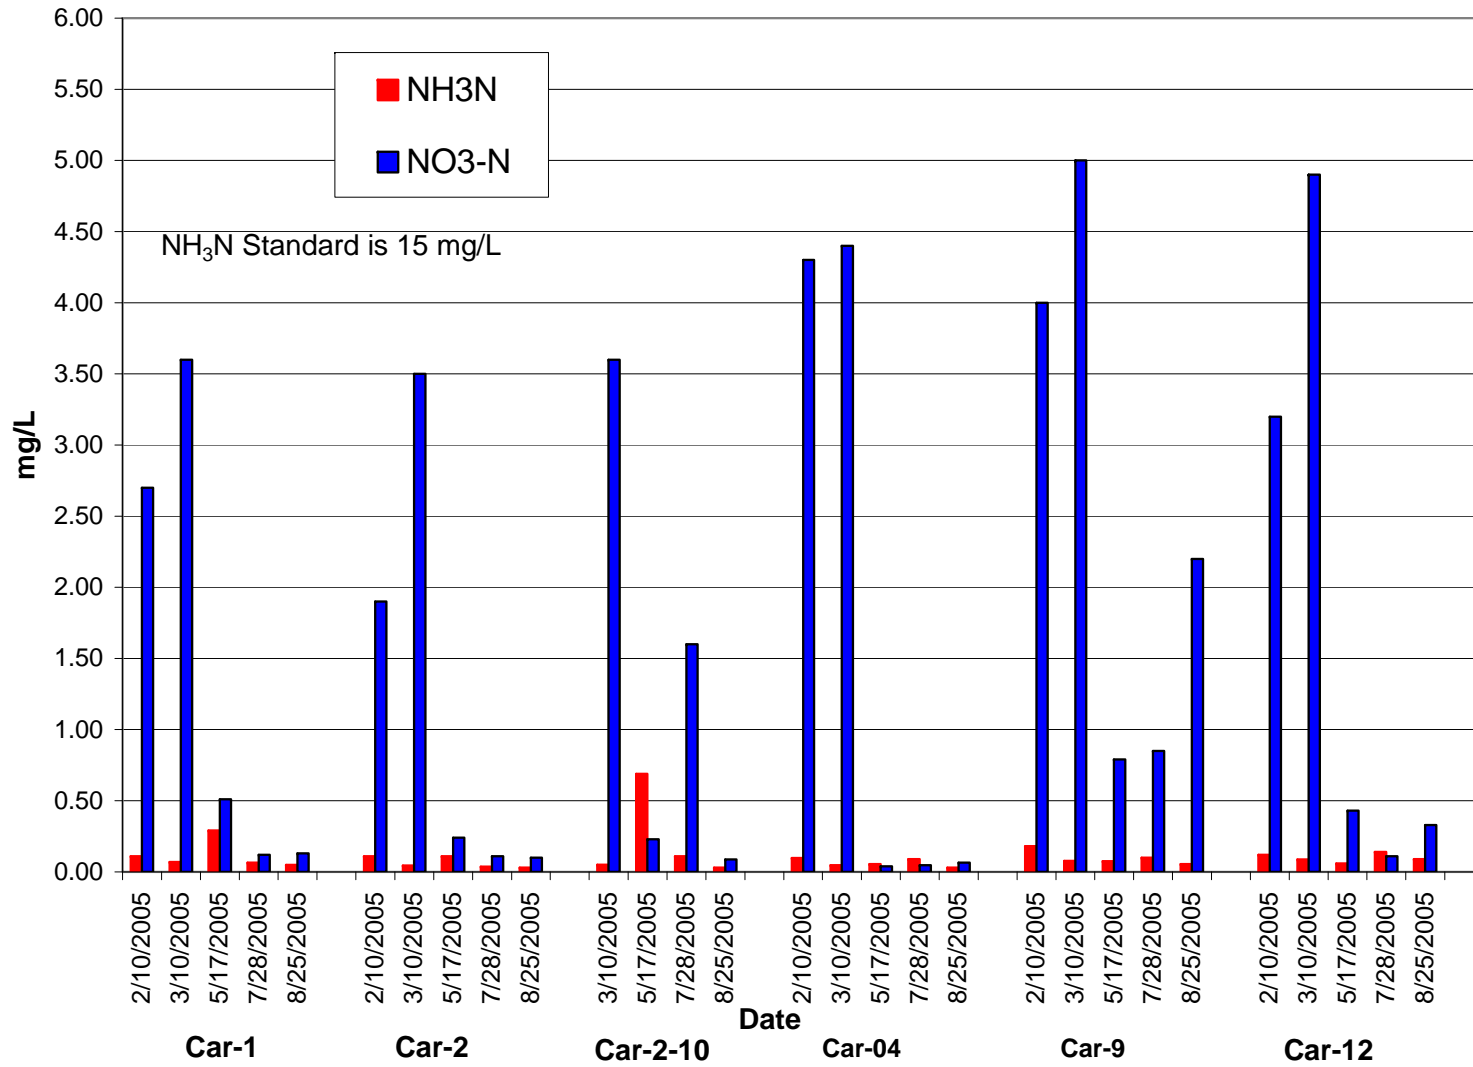


Phosphorous

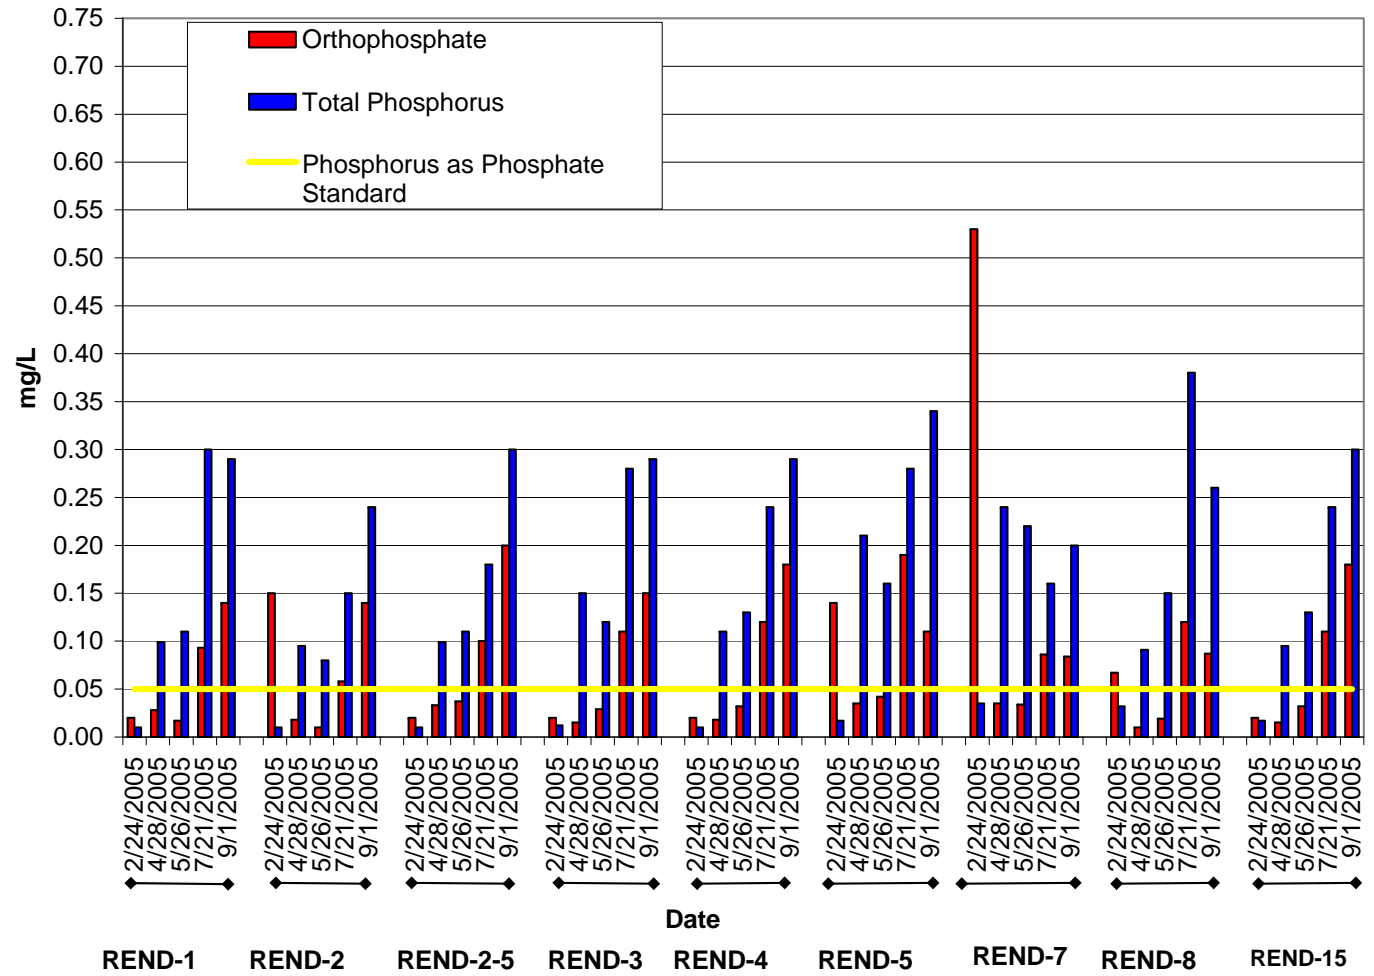

Chlorophyll & Pheophytin

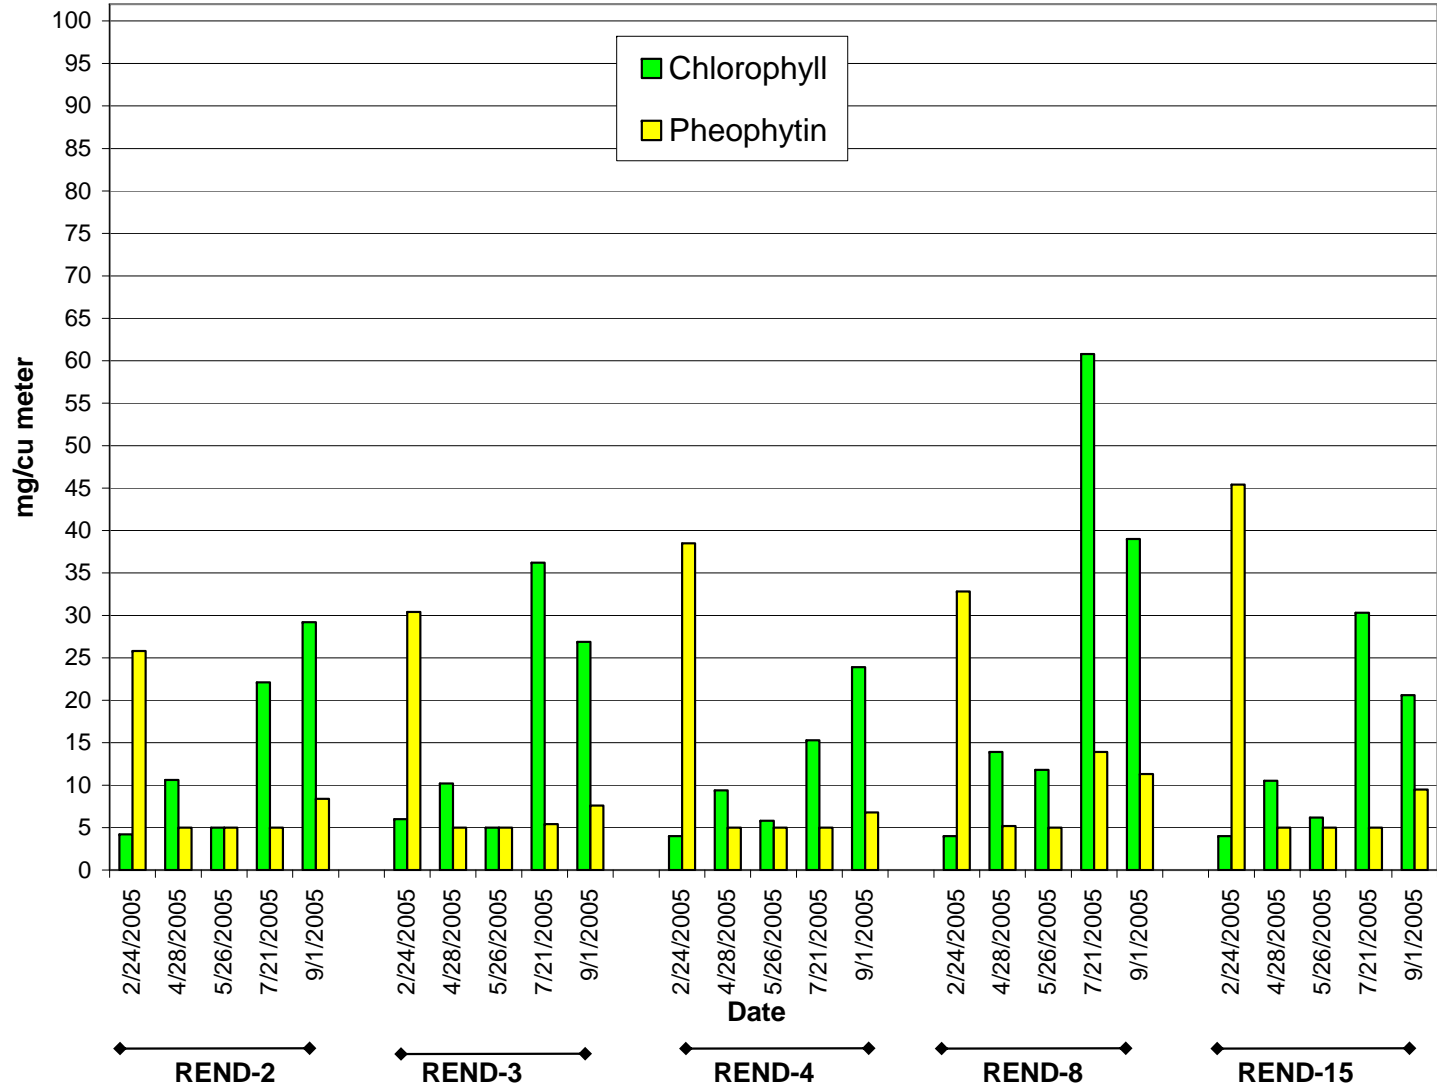


Pesticides

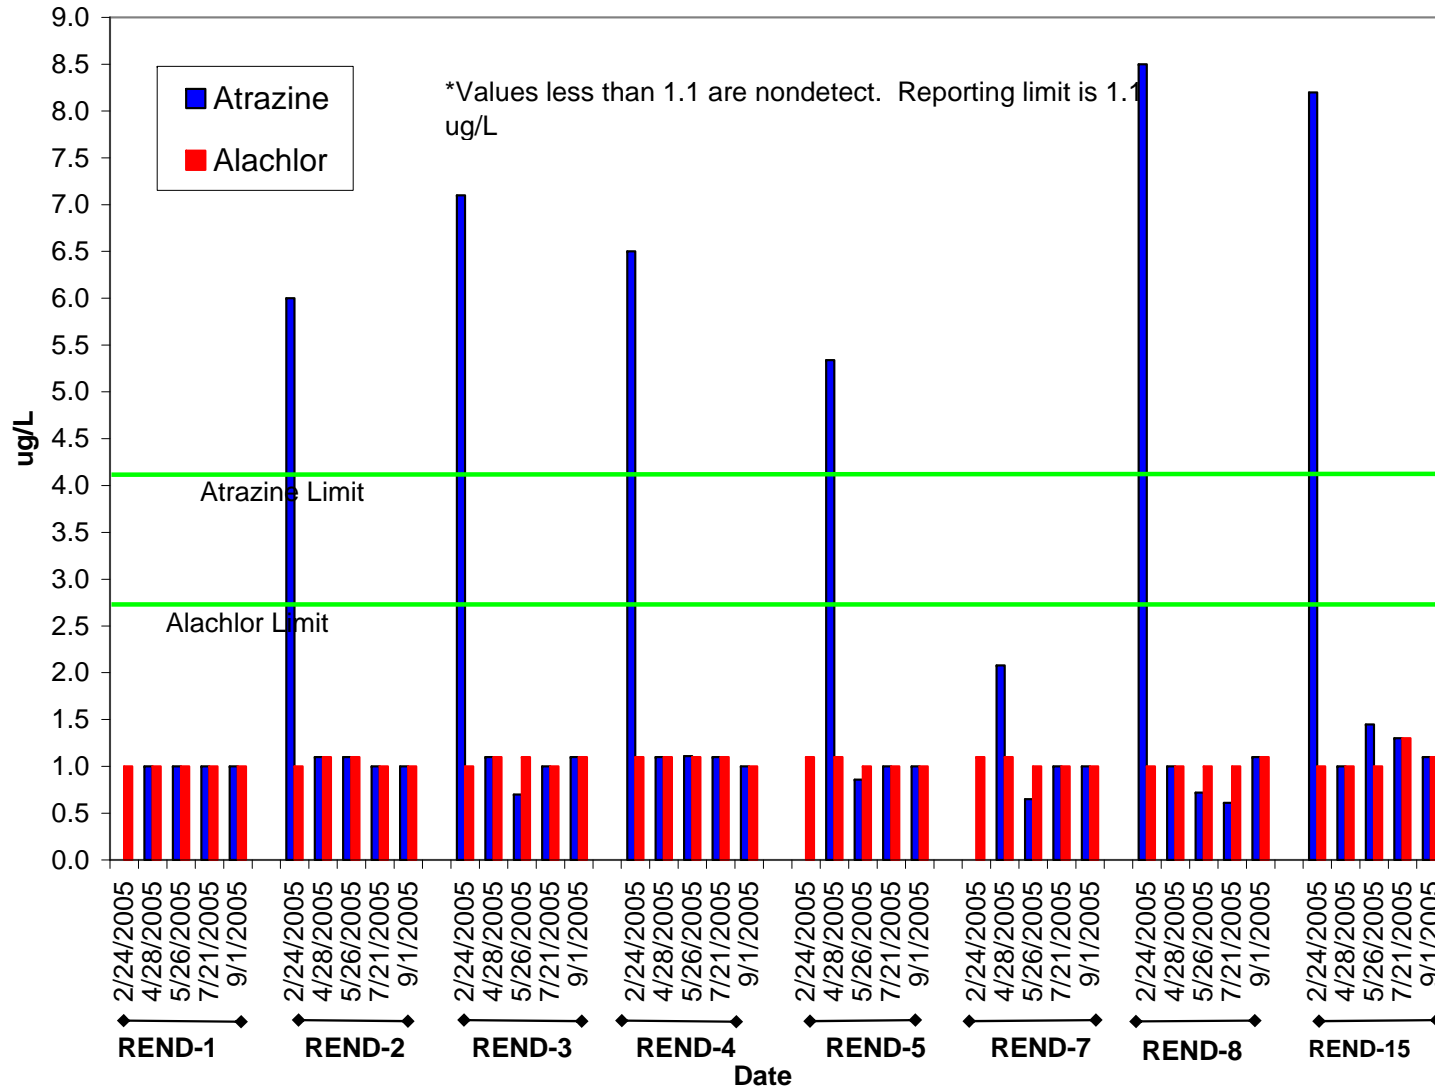


APPENDIX C

FIELD DATA GRAPHS


Site 1 Spillway Temperature & DO

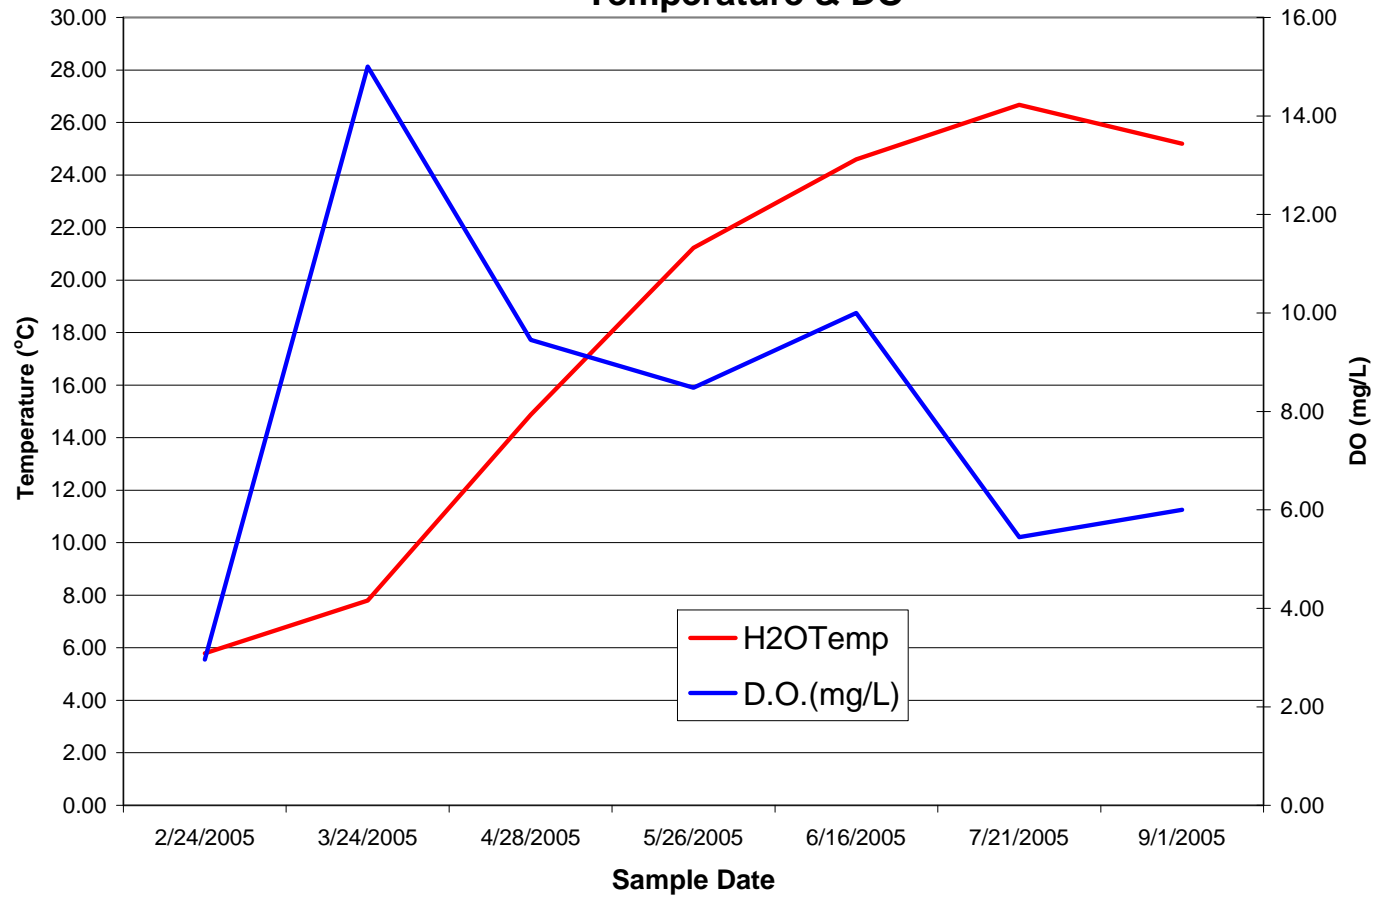


**Site 2 Dam Lake Side
Temperature & DO & Depth
February 24, 2005**

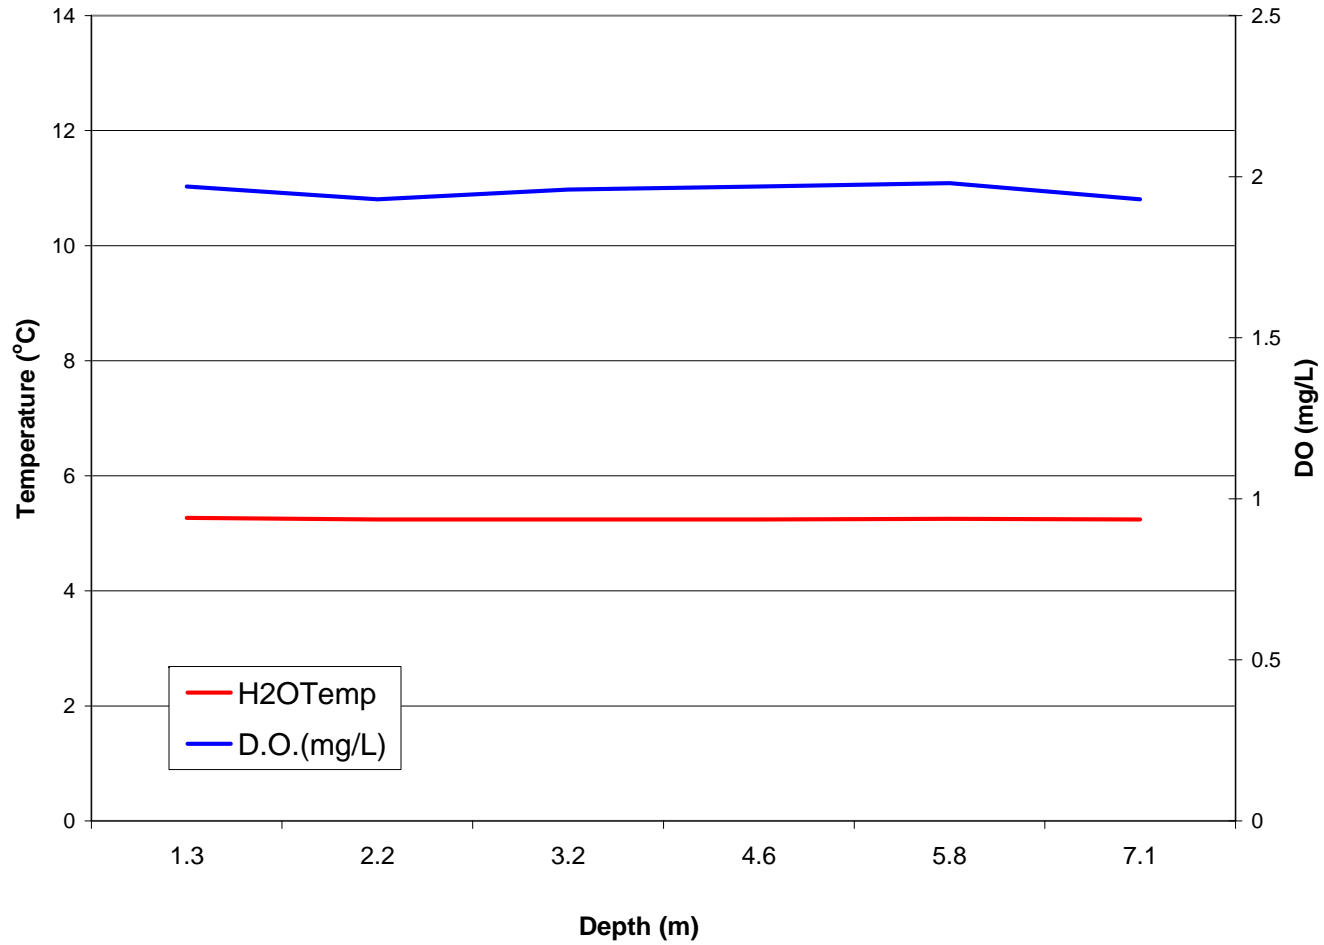


**Site 2 Dam Lake Side
Temperature & DO & Depth
March 24, 2005**

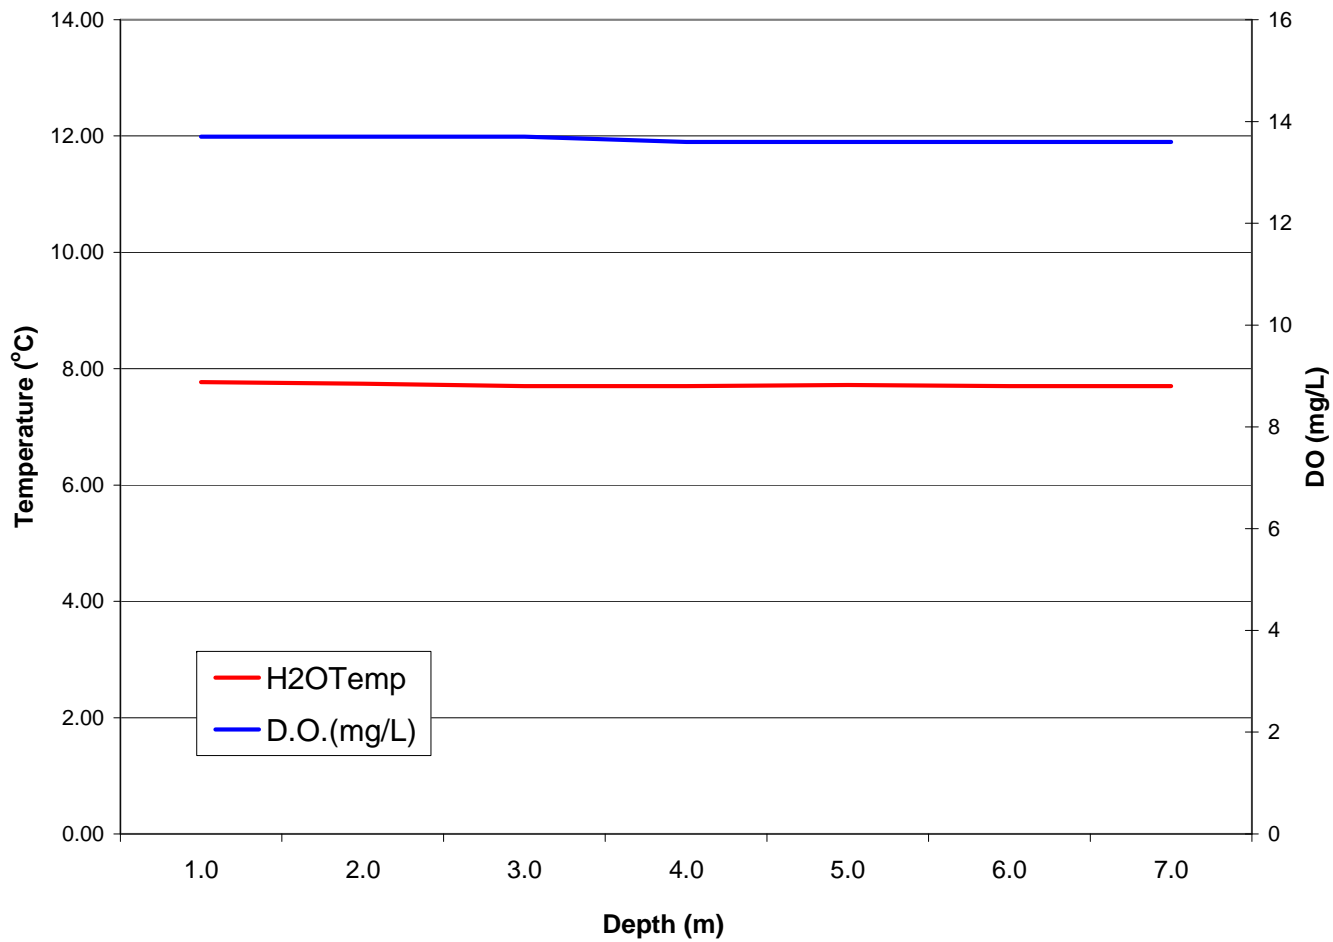


**Site 2 Dam Lake Side
Temperature & DO & Depth
April 28, 2005**

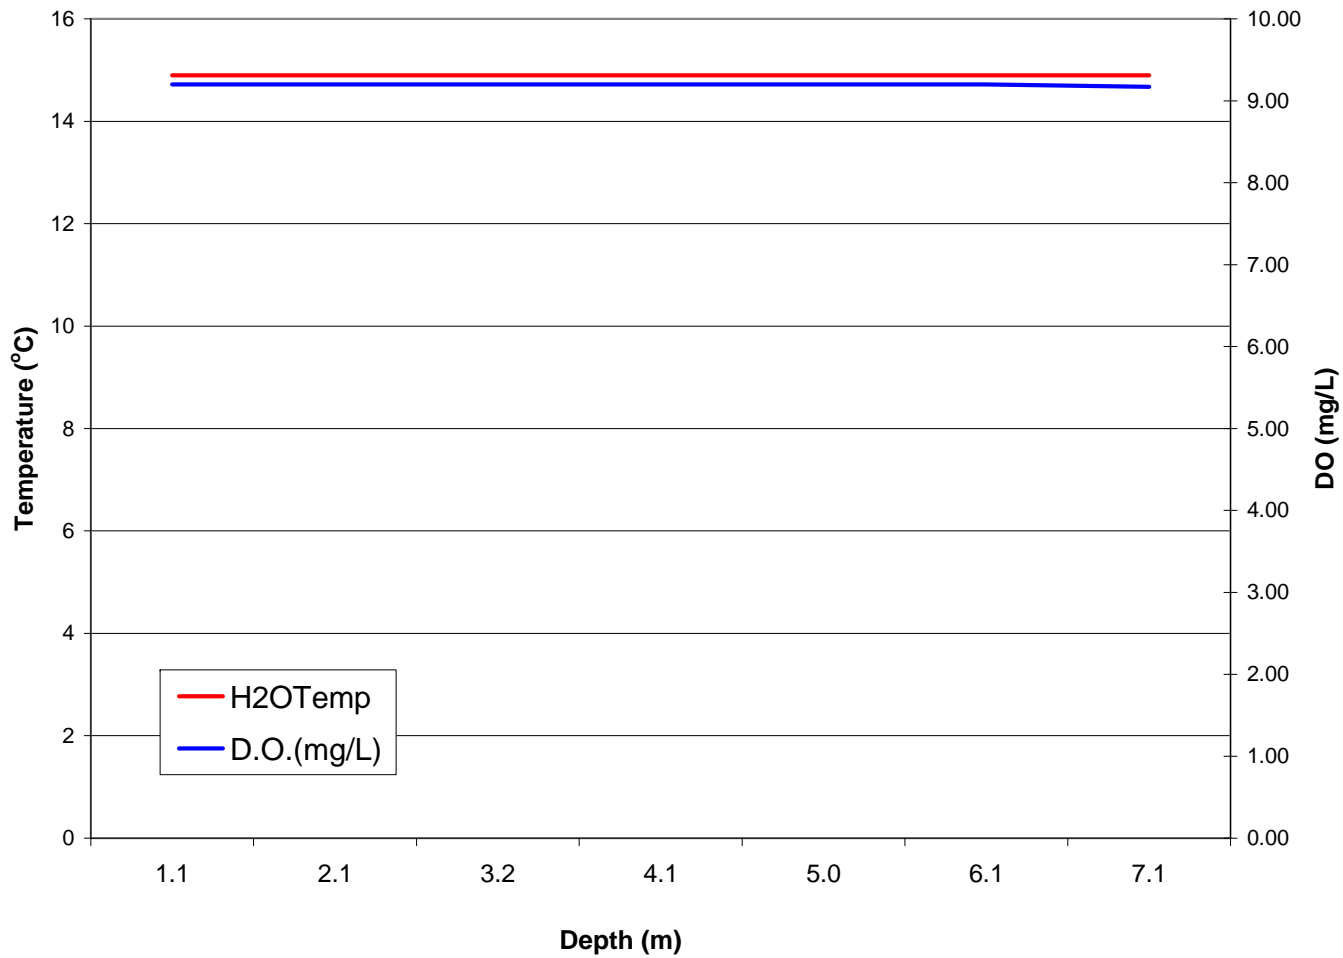


Site 2 Dam Lake Side
Temperature & DO & Depth
May 26, 2005

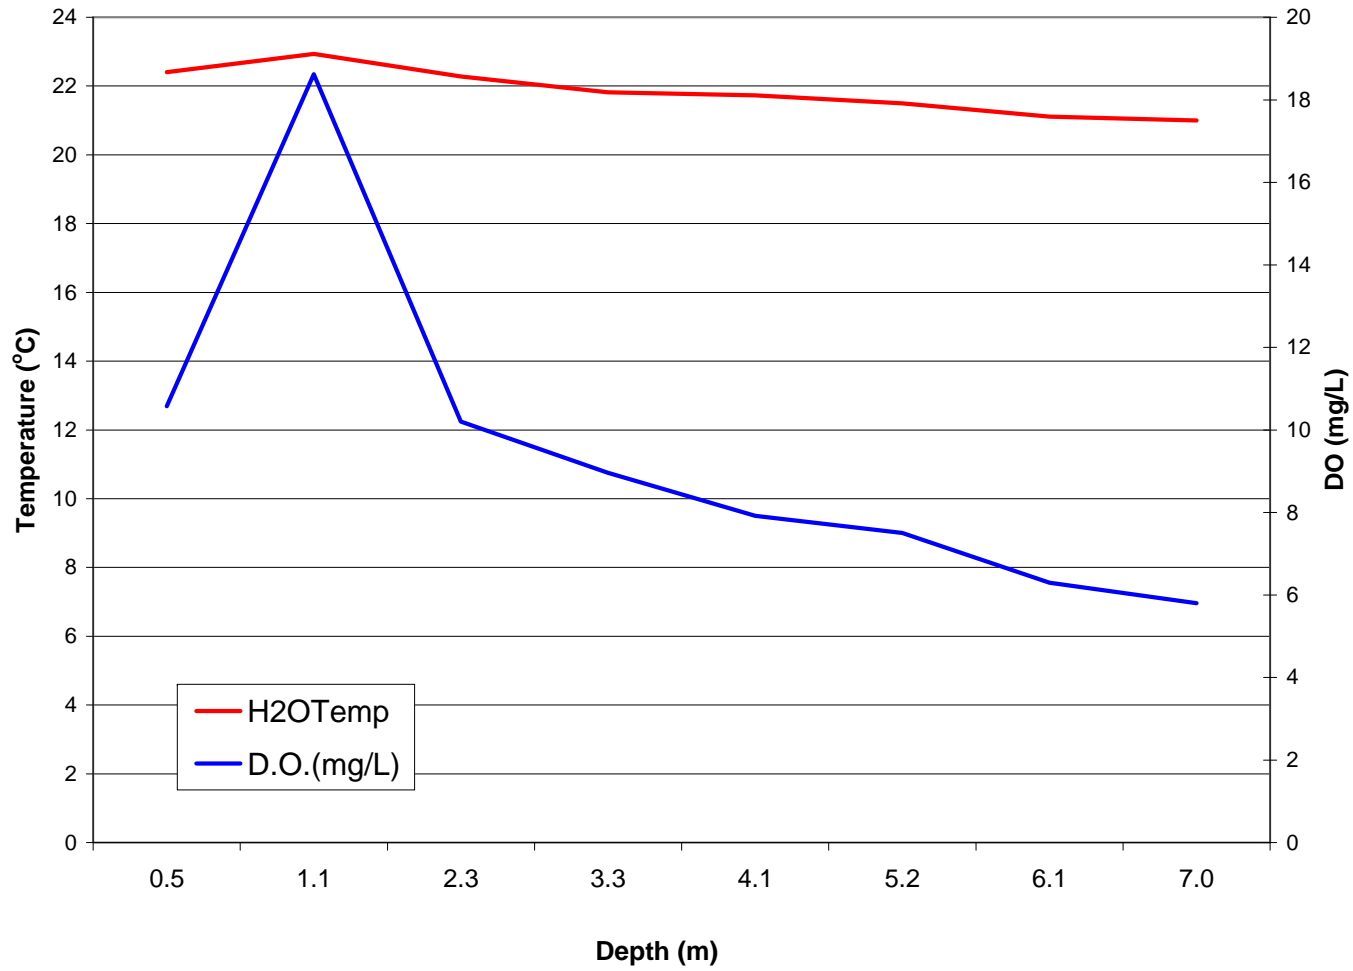


Site 2 Dam Lake Side
Temperature & DO & Depth
June 16, 2005

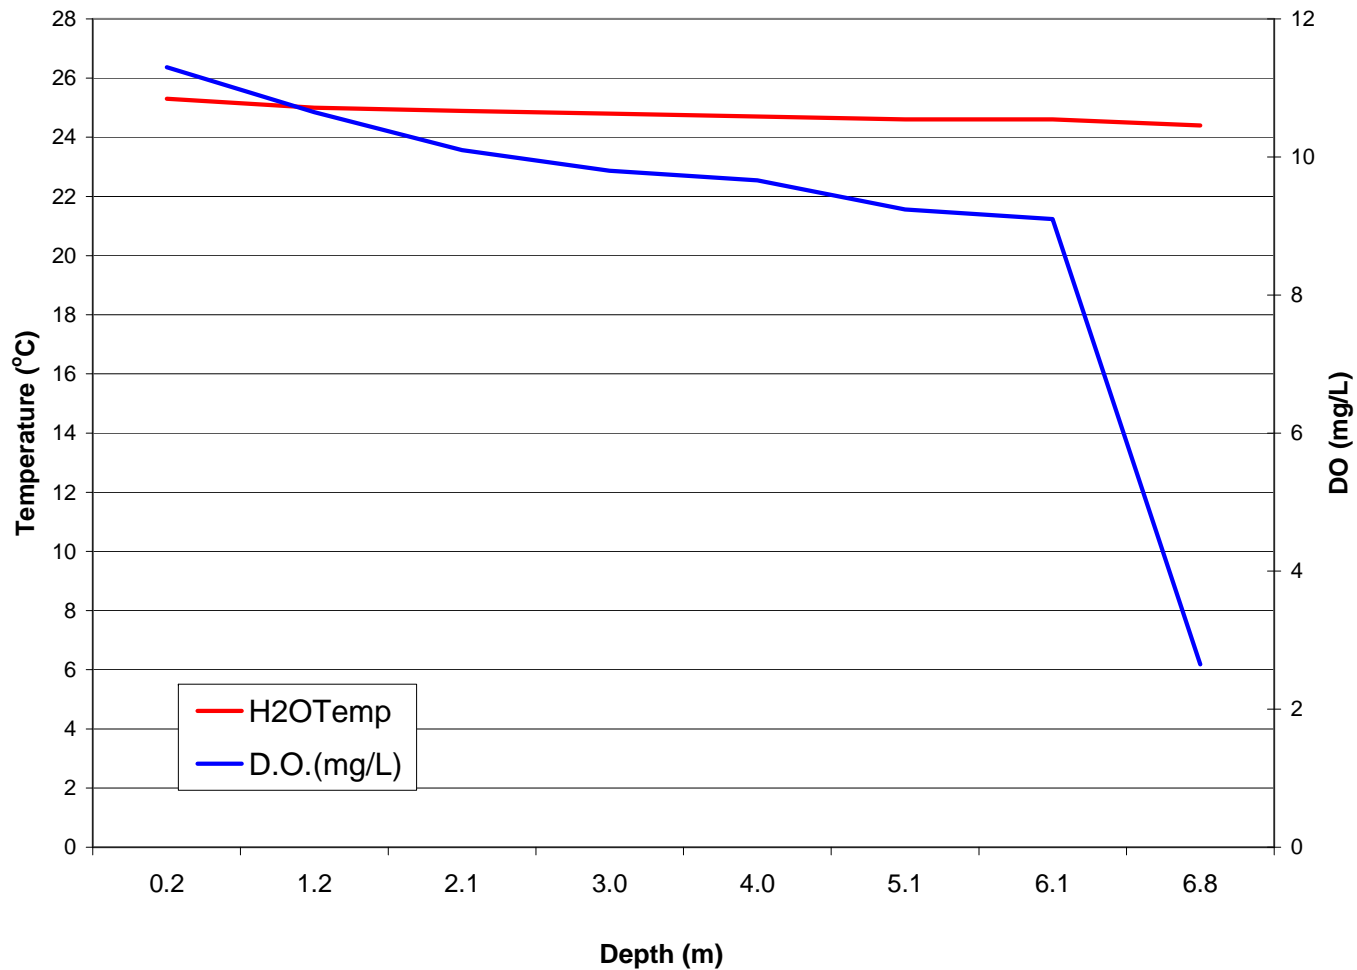


Site 2 Dam Lake Side
Temperature & DO & Depth
July 21, 2005

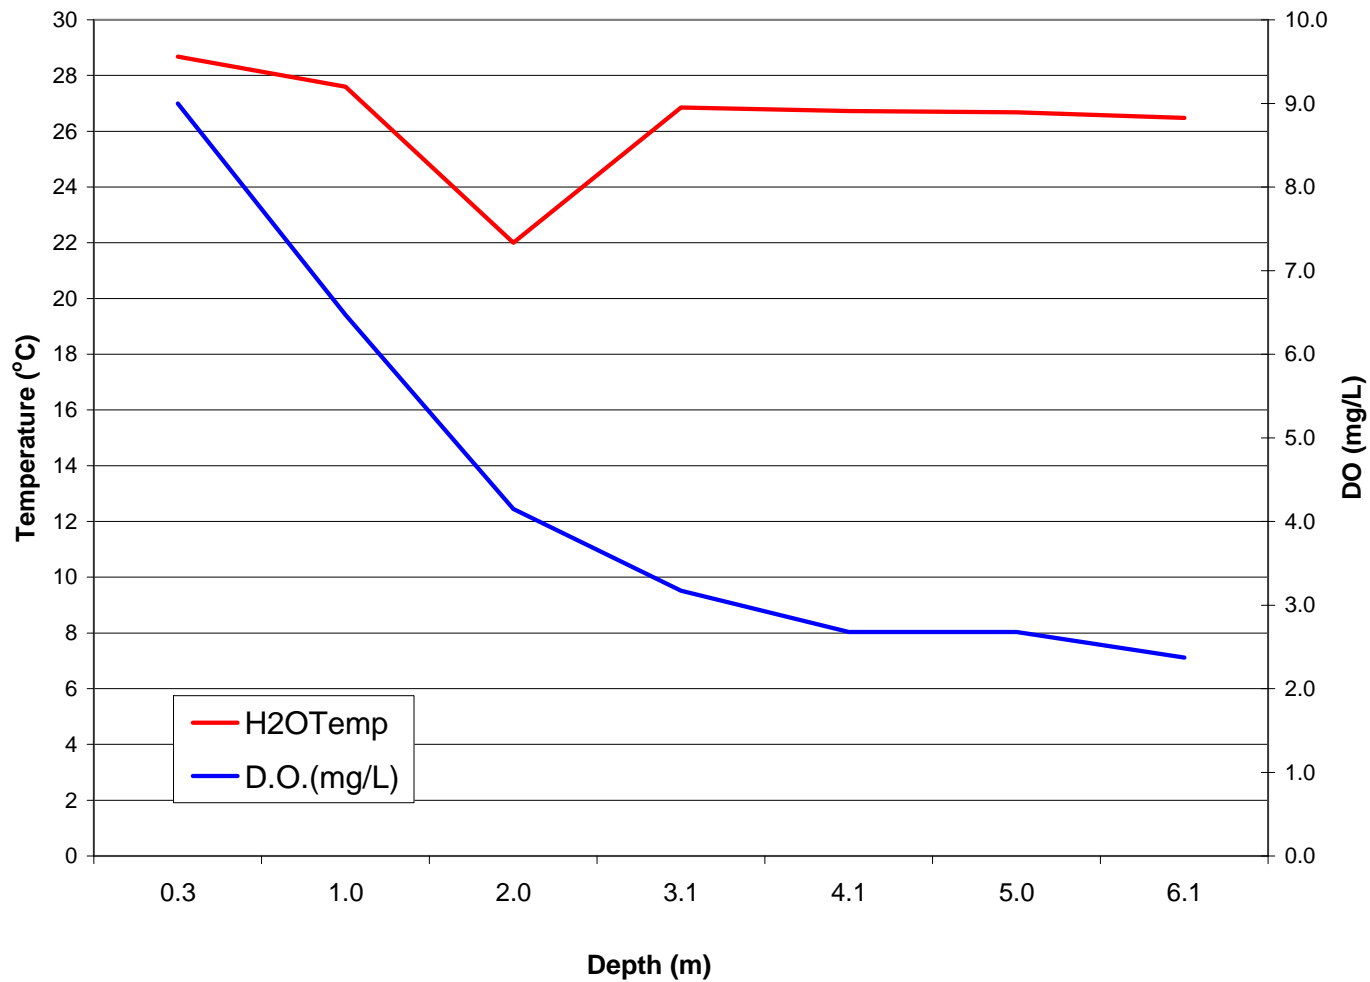


**Site 2 Dam Lake Side
Temperature & DO & Depth
September 1, 2005**

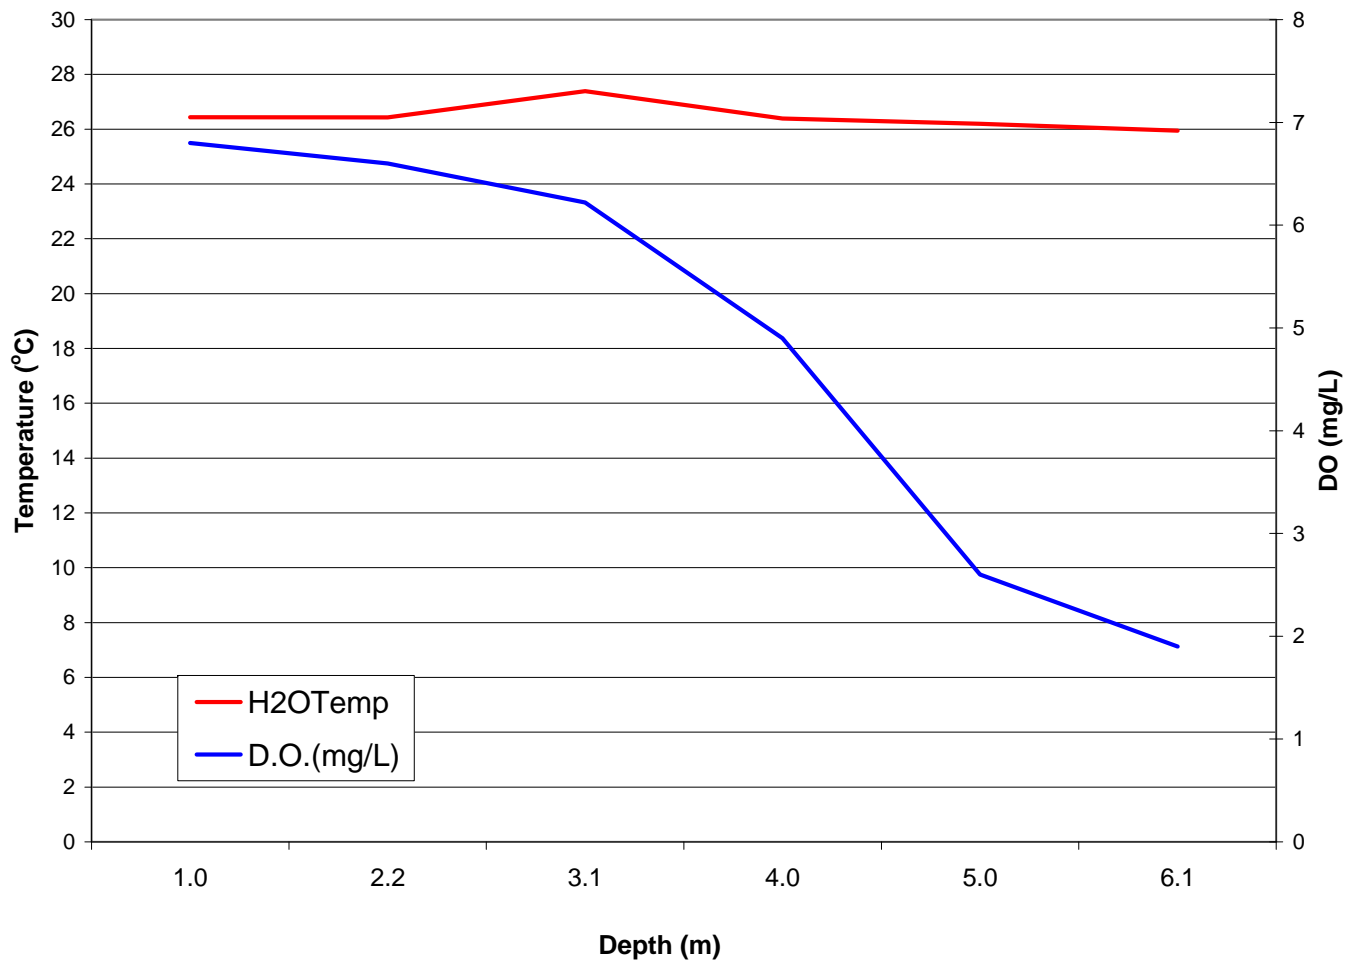


Site 3
Temperature & DO & Depth
February 24, 2005

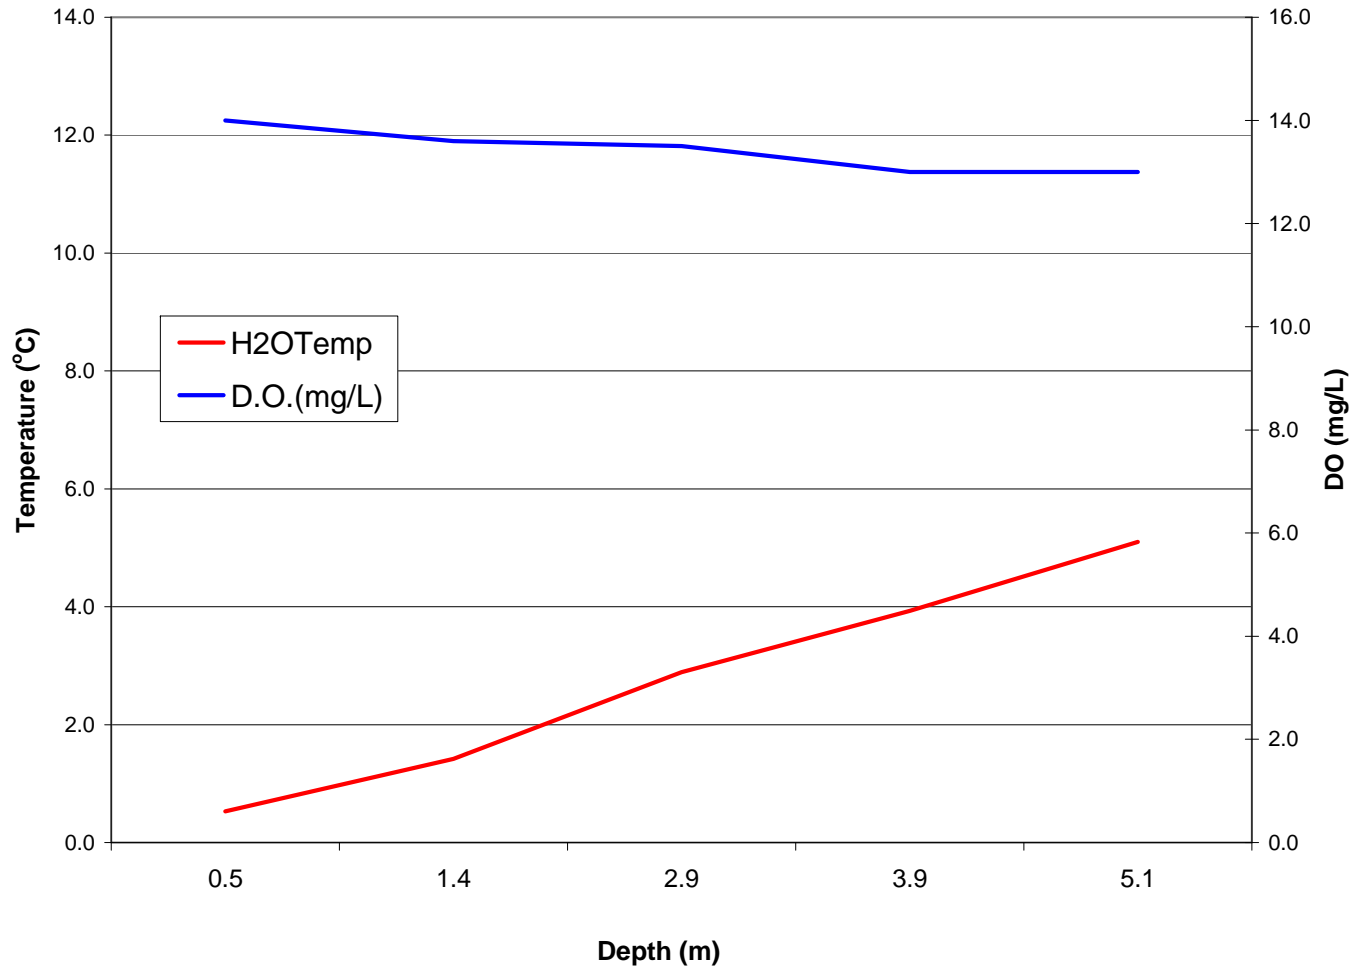


Site 3
Temperature & DO & Depth
March 24, 2005

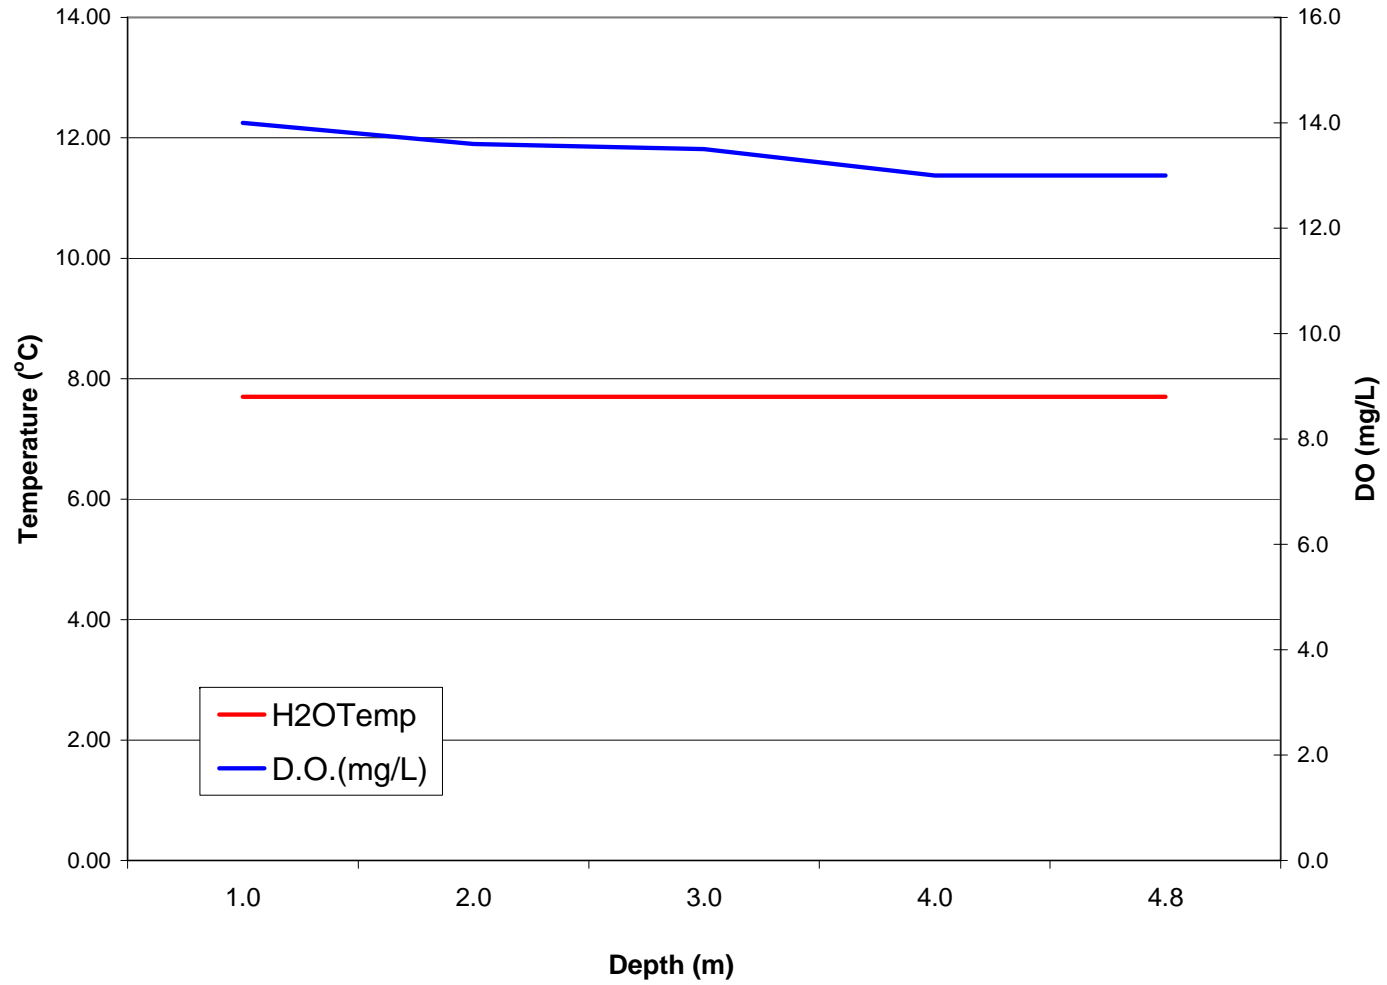


**Site 3
Temperature & DO & Depth
April 28, 2005**

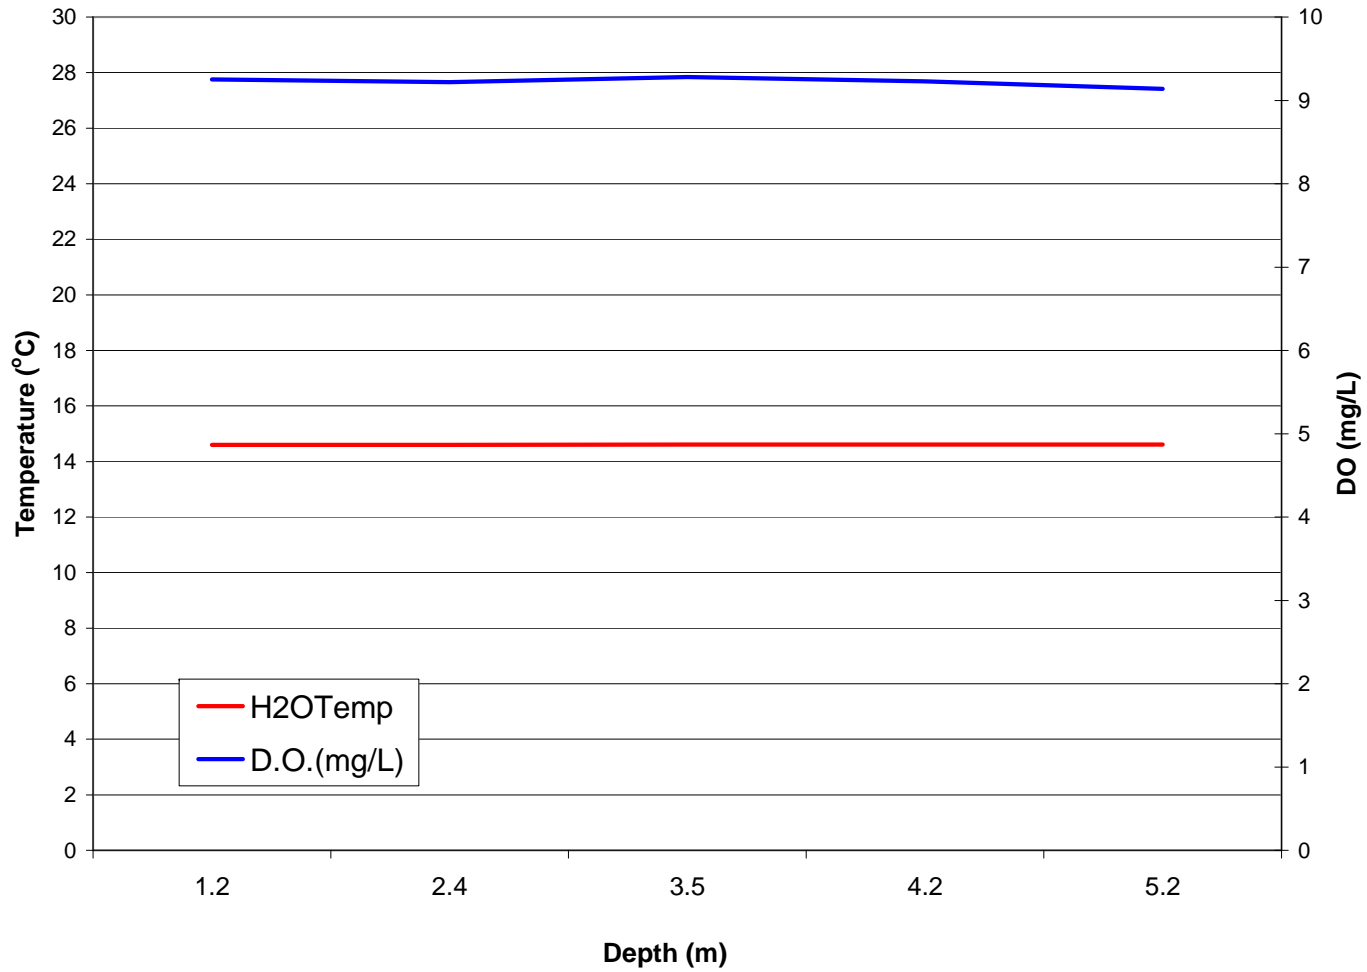


Site 3
Temperature & DO & Depth
May 26, 2005

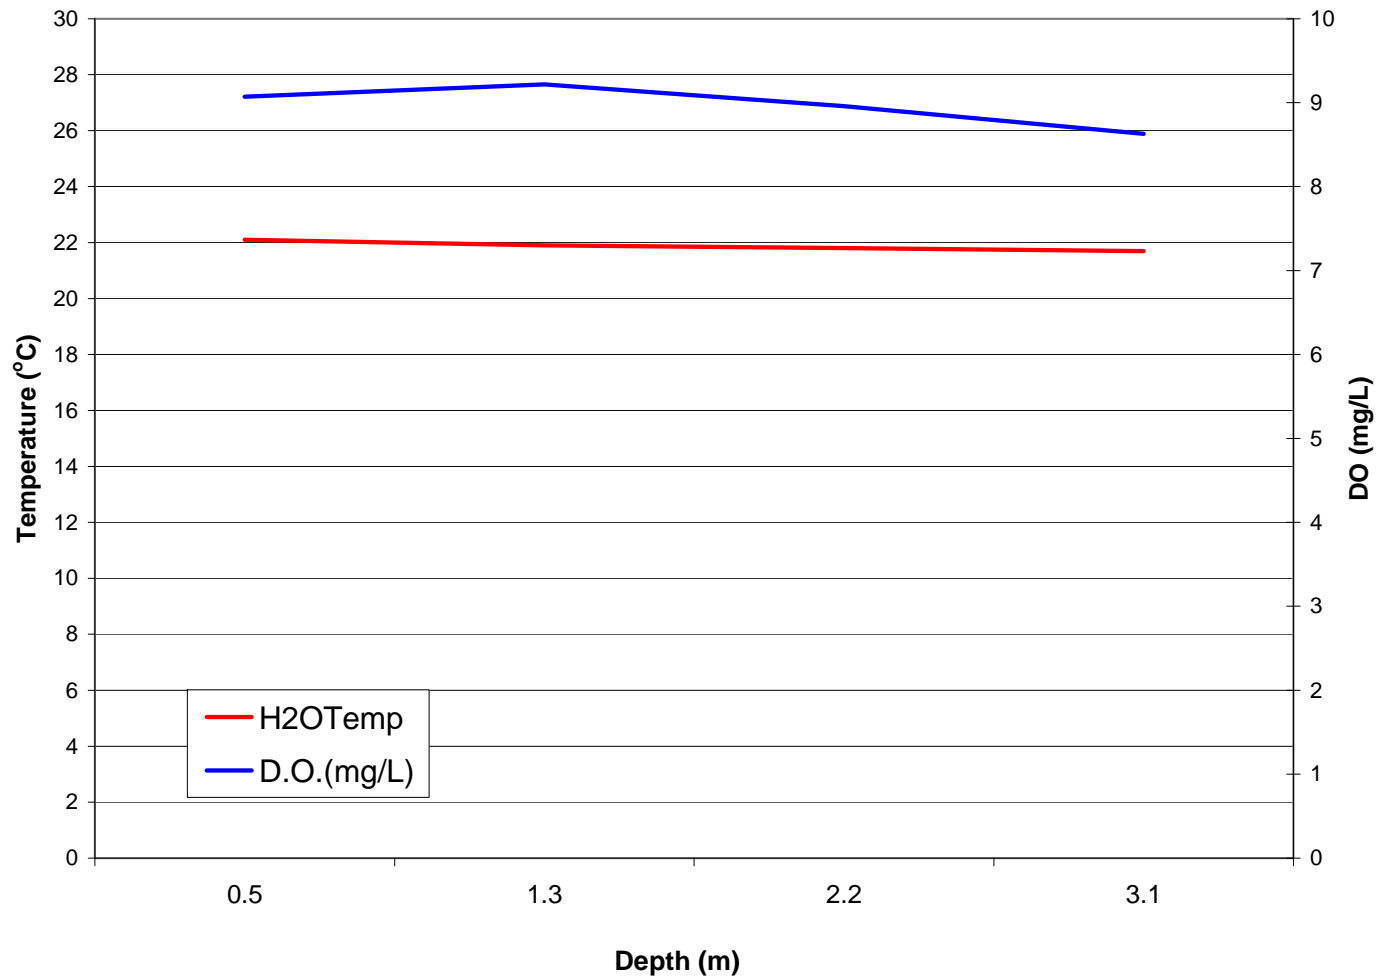


**Site 3
Temperature & DO & Depth
June 16, 2005**

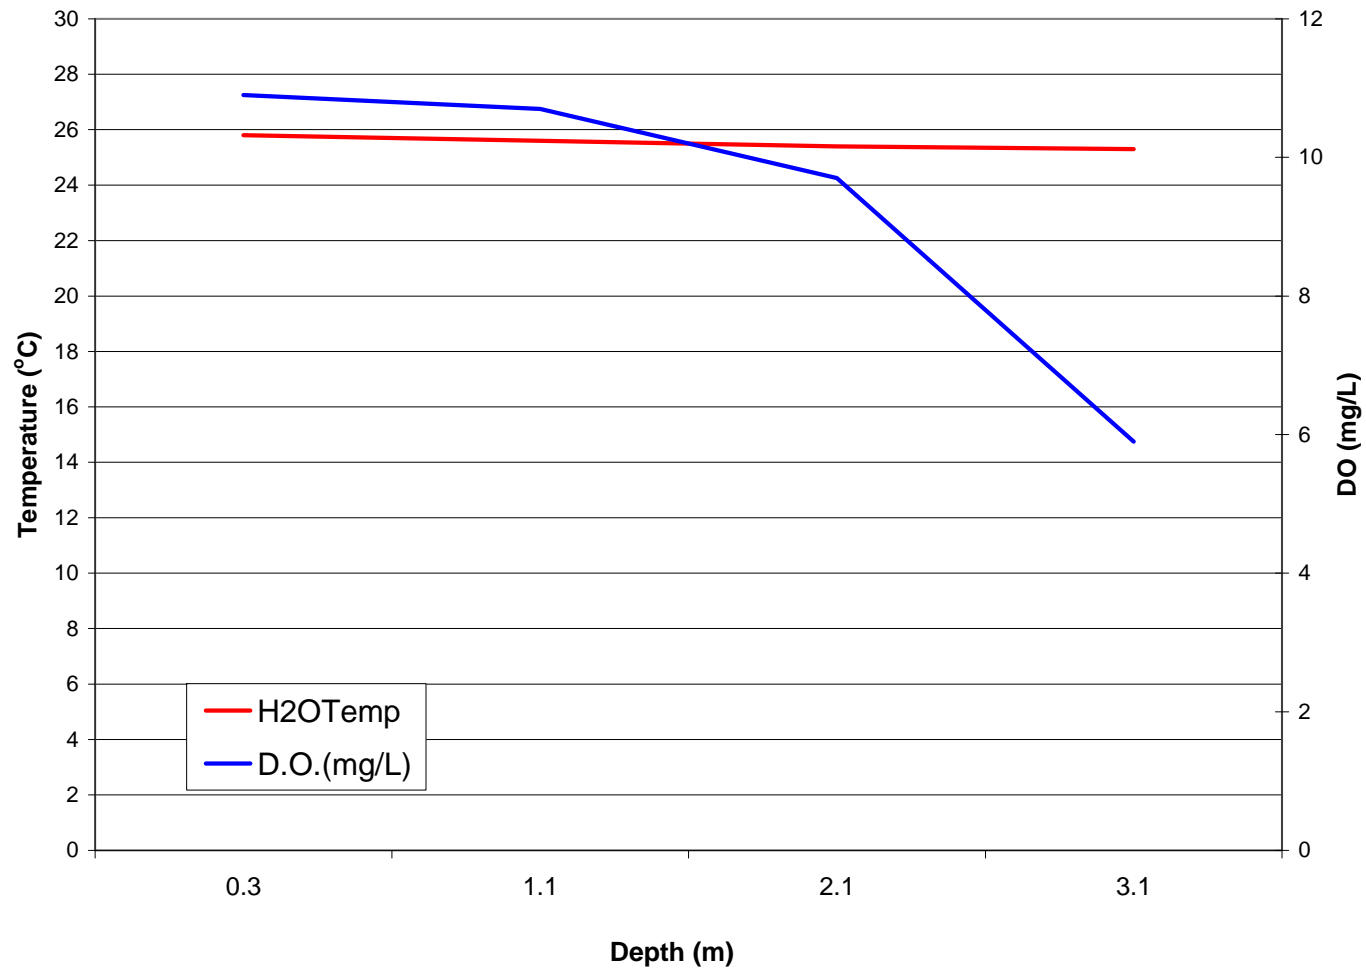


Site 3
Temperature & DO & Depth
July 21, 2005

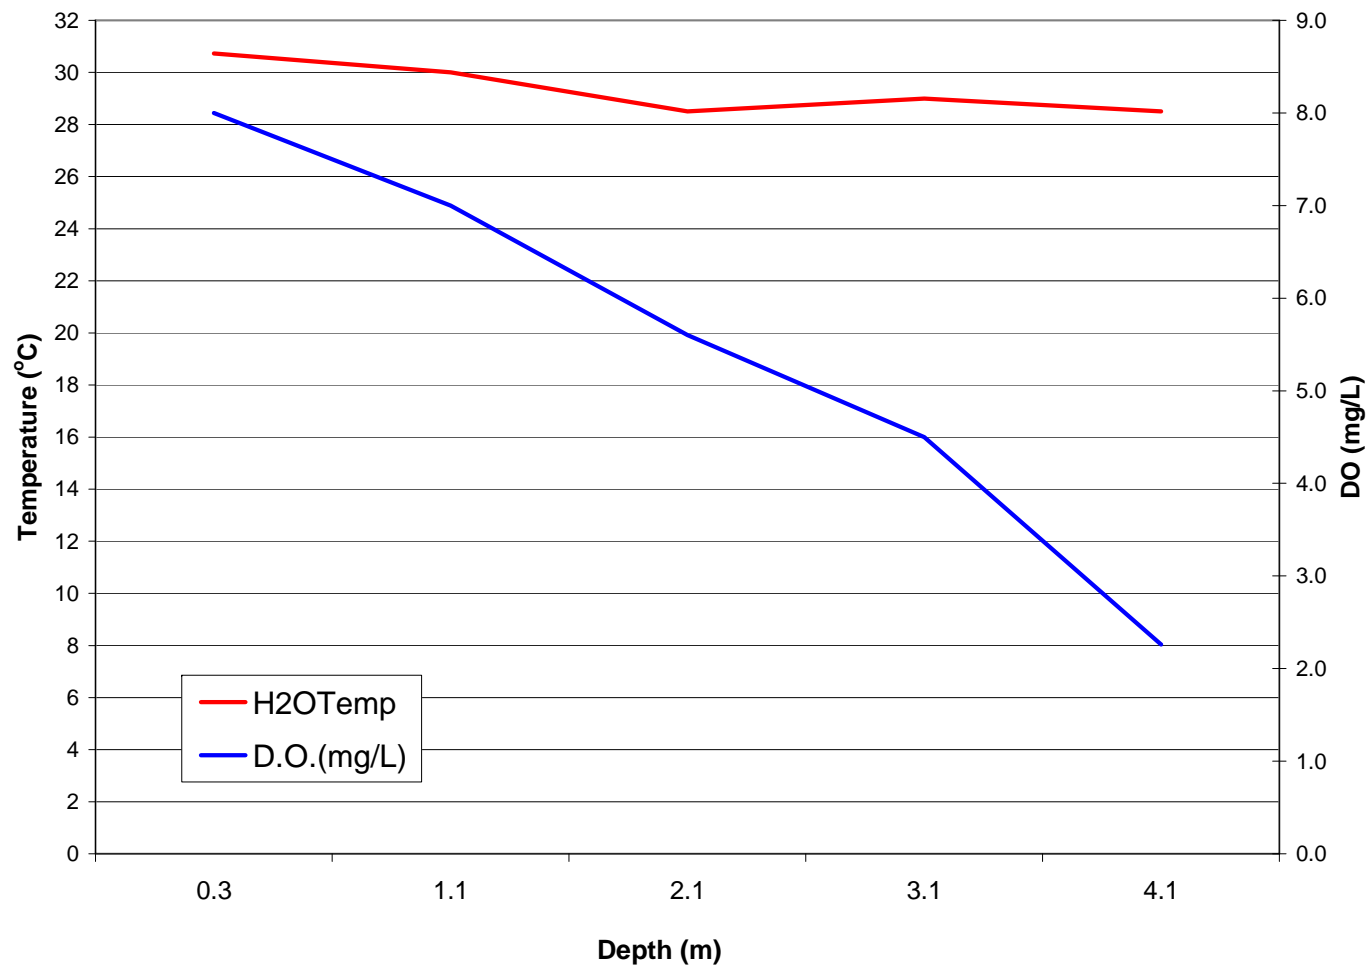


Site 3
Temperature & DO & Depth
September 1, 2005

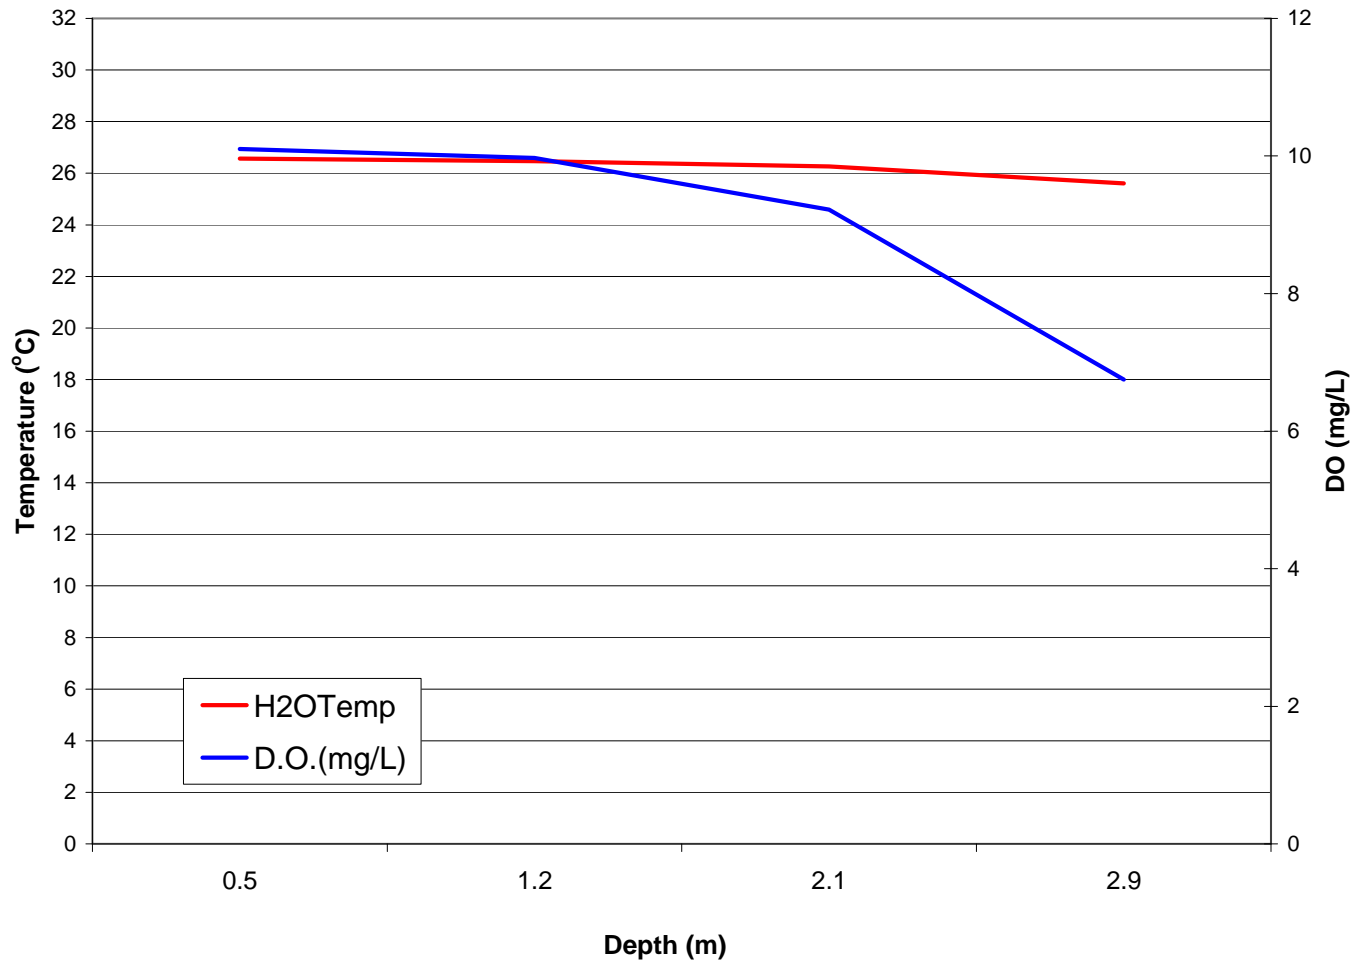


Site 4
Temperature & DO & Depth
February 24, 2005

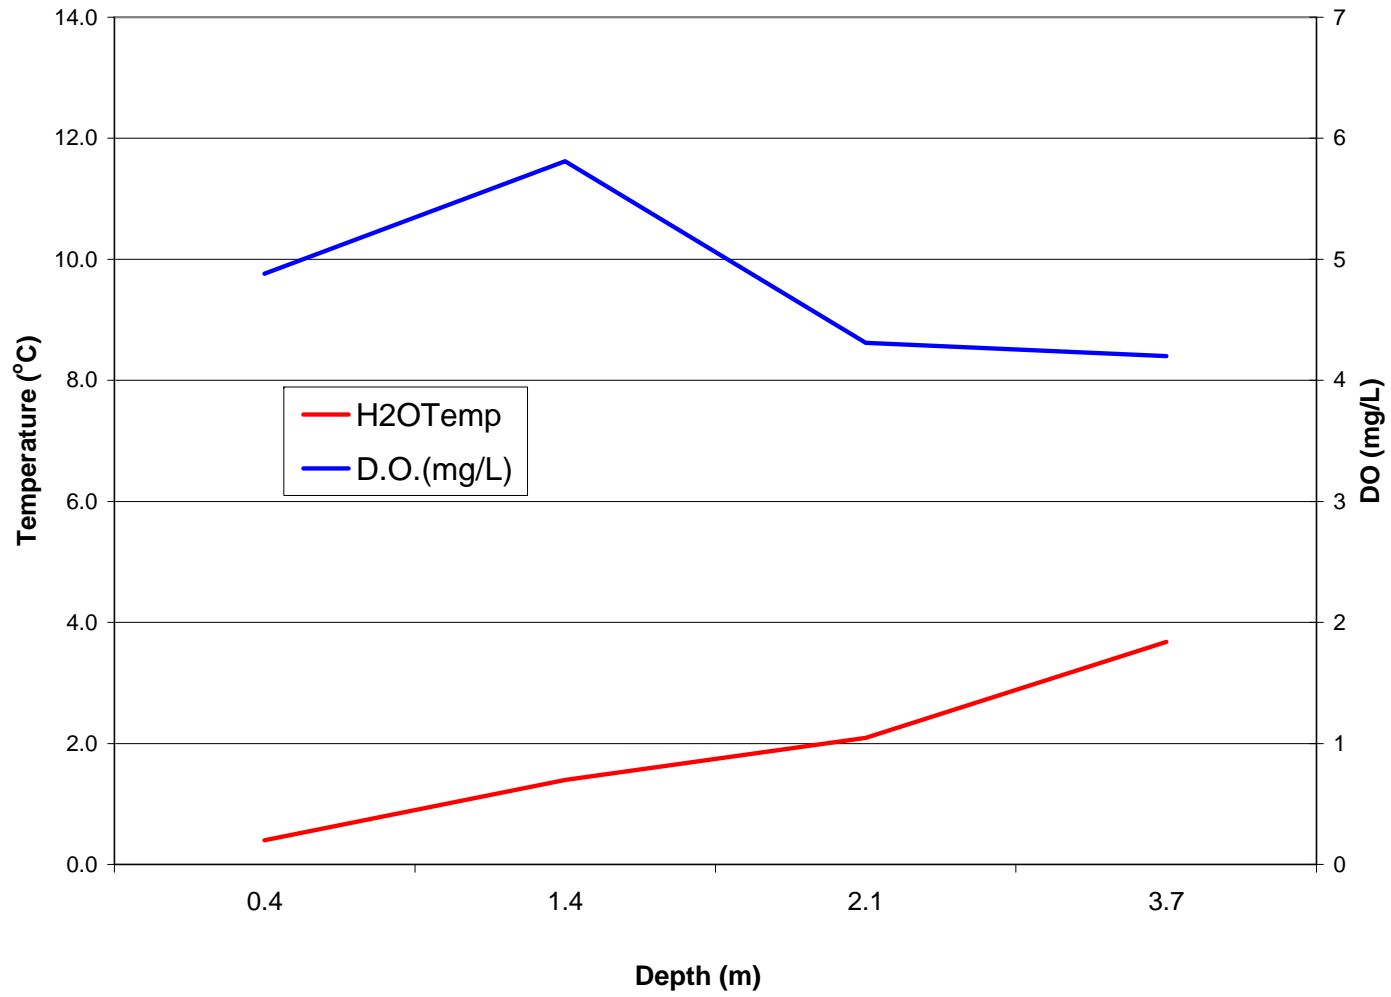


Site 4
Temperature & DO & Depth
March 24, 2005

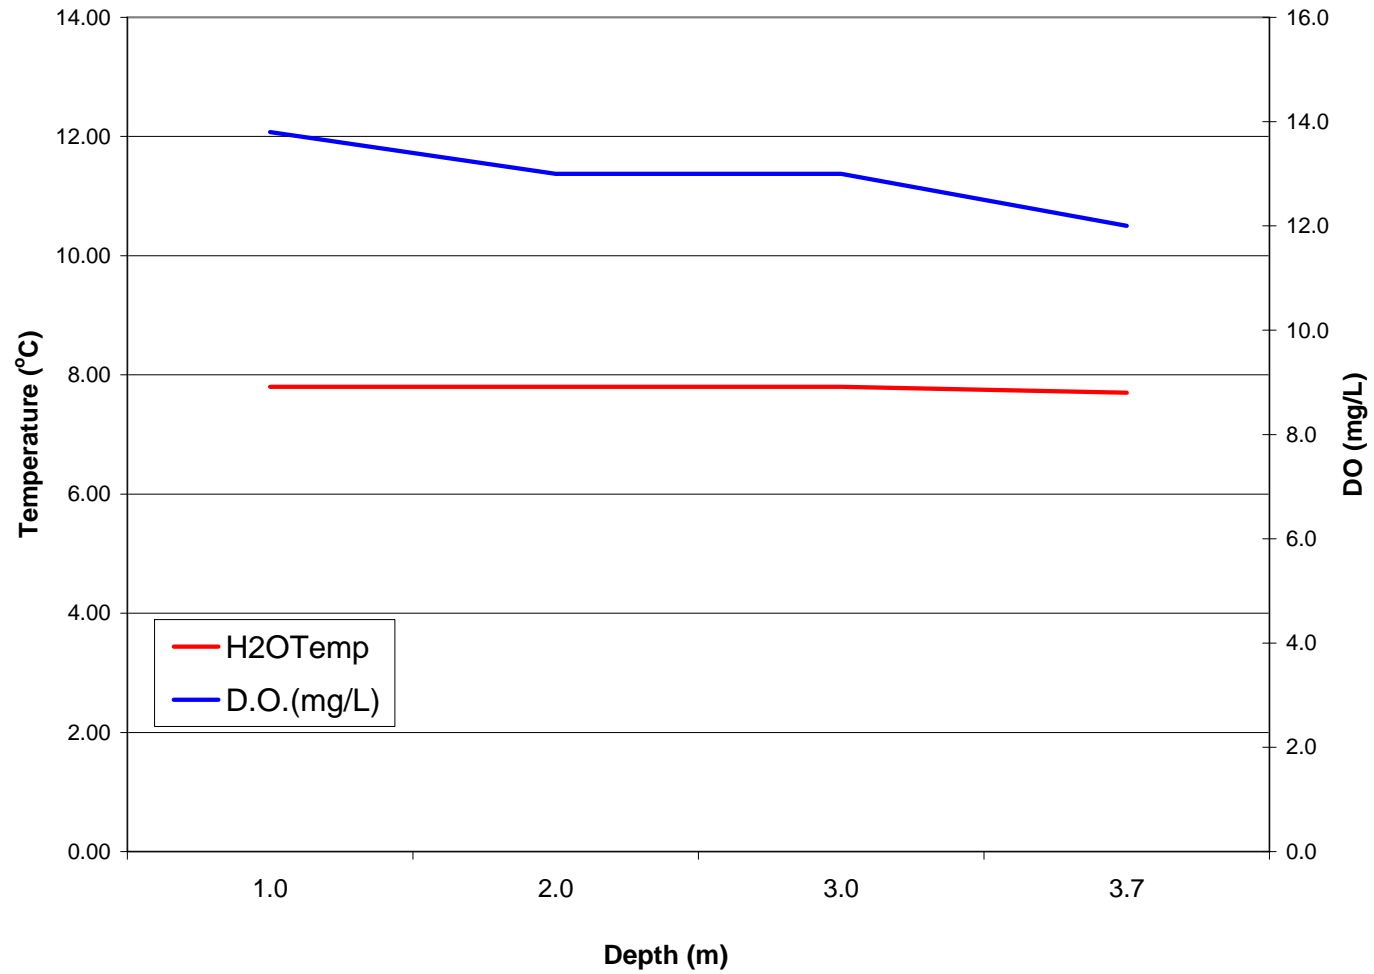


Site 4
Temperature & DO & Depth
May 26, 2005

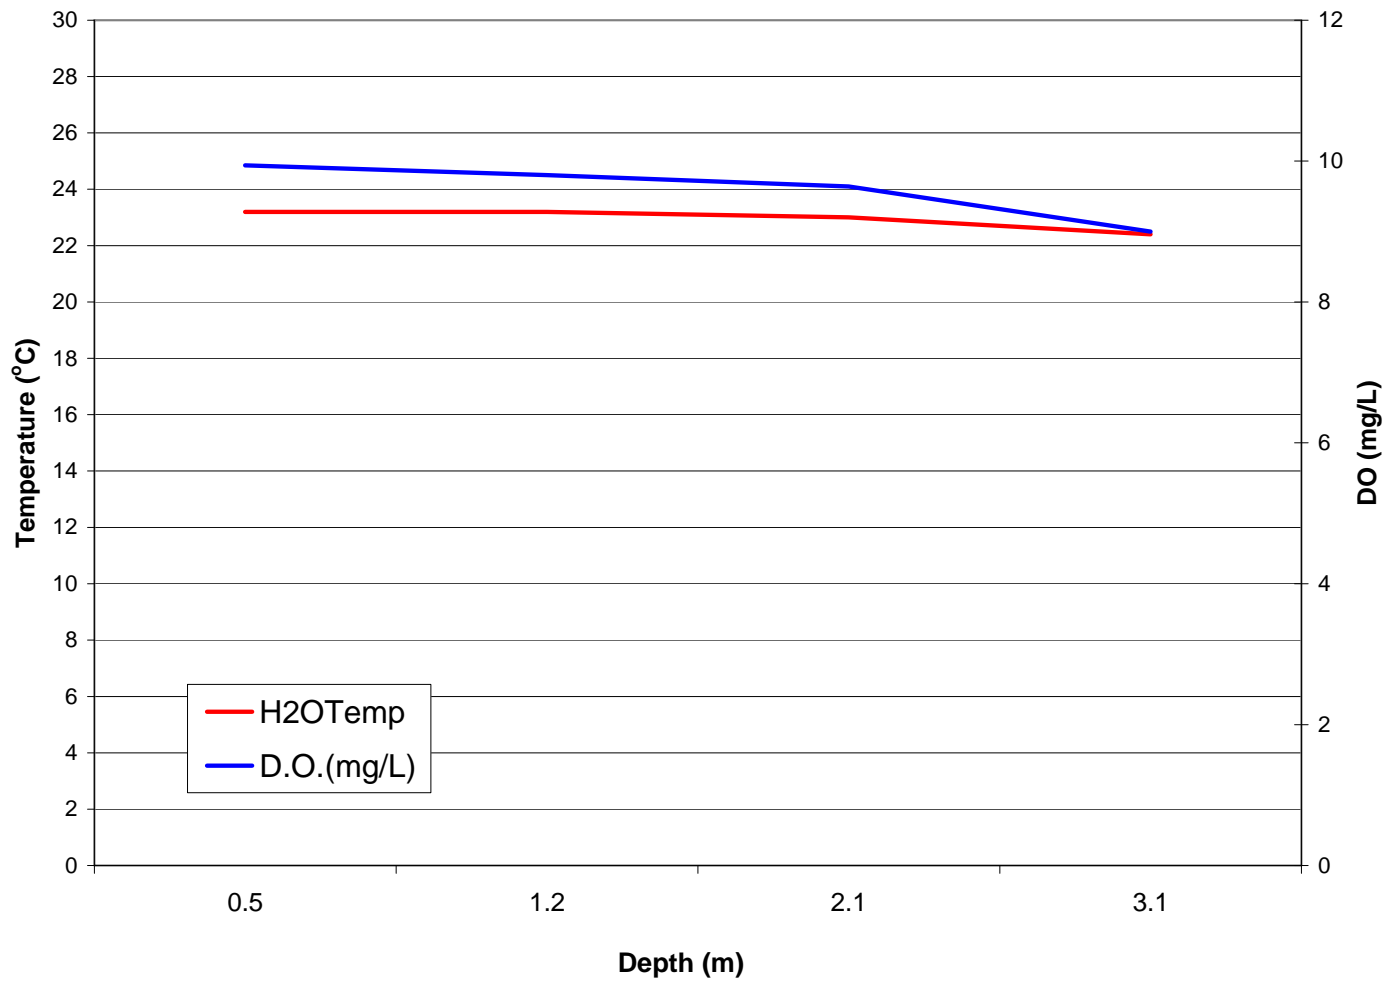


Site 4
Temperature & DO & Depth
June 16, 2005

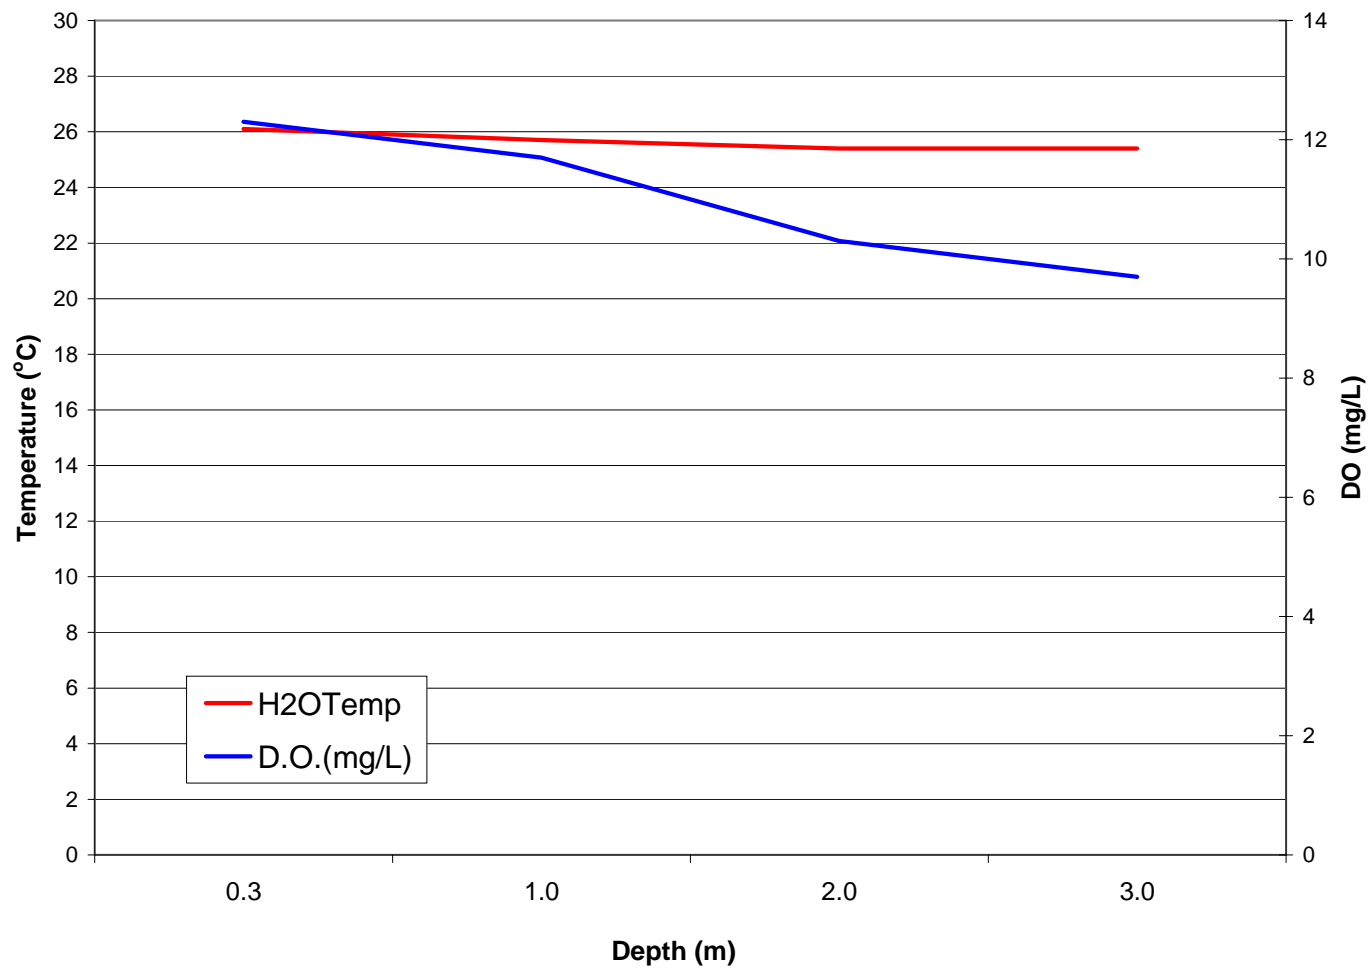


**Site 4
Temperature & DO & Depth
July 21, 2005**

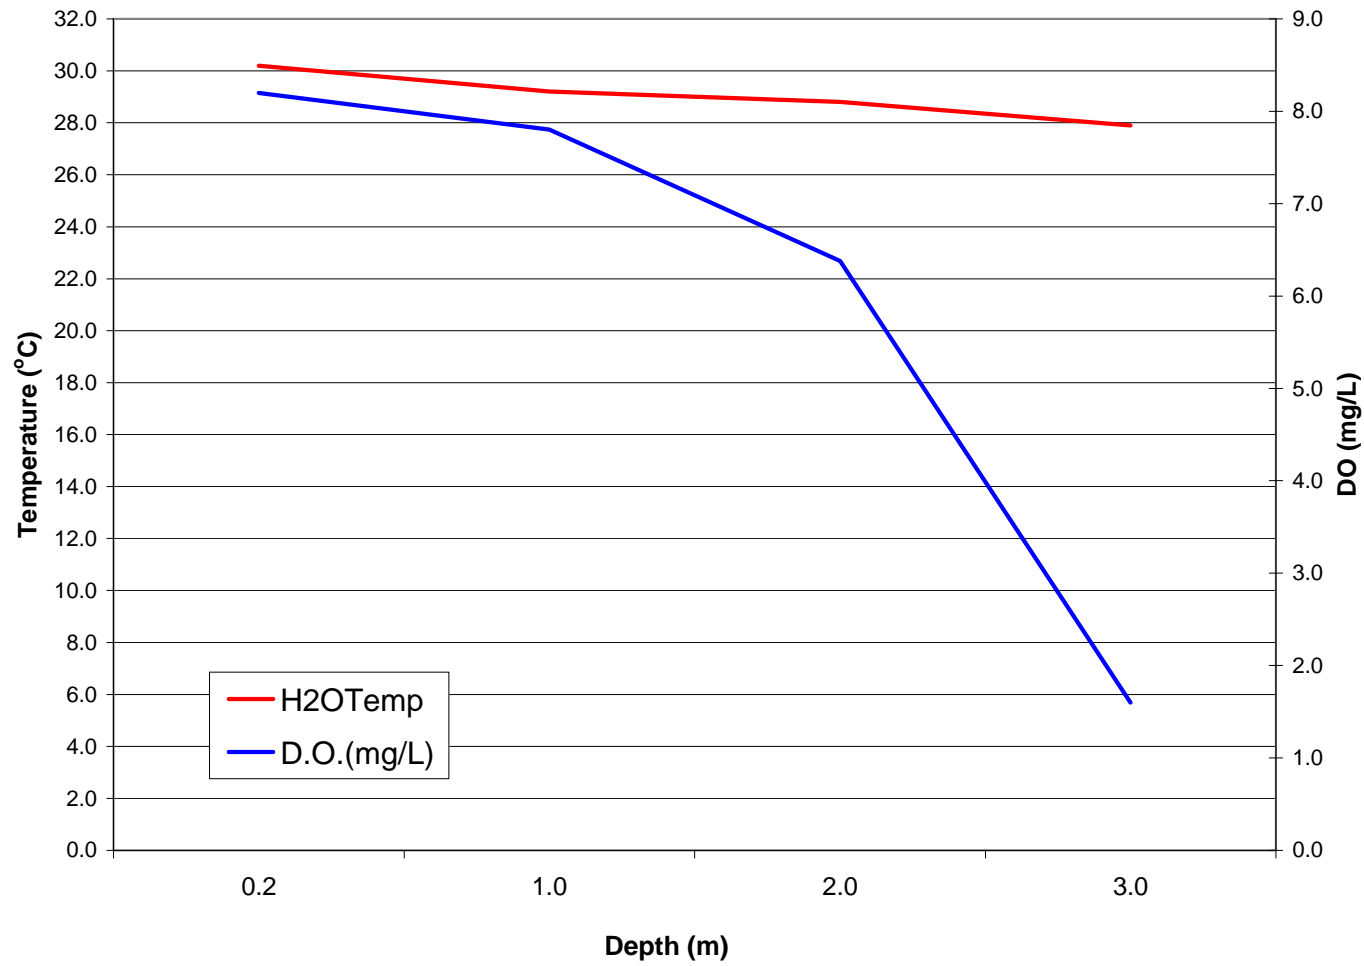


Site 4
Temperature & DO & Depth
September 1, 2005

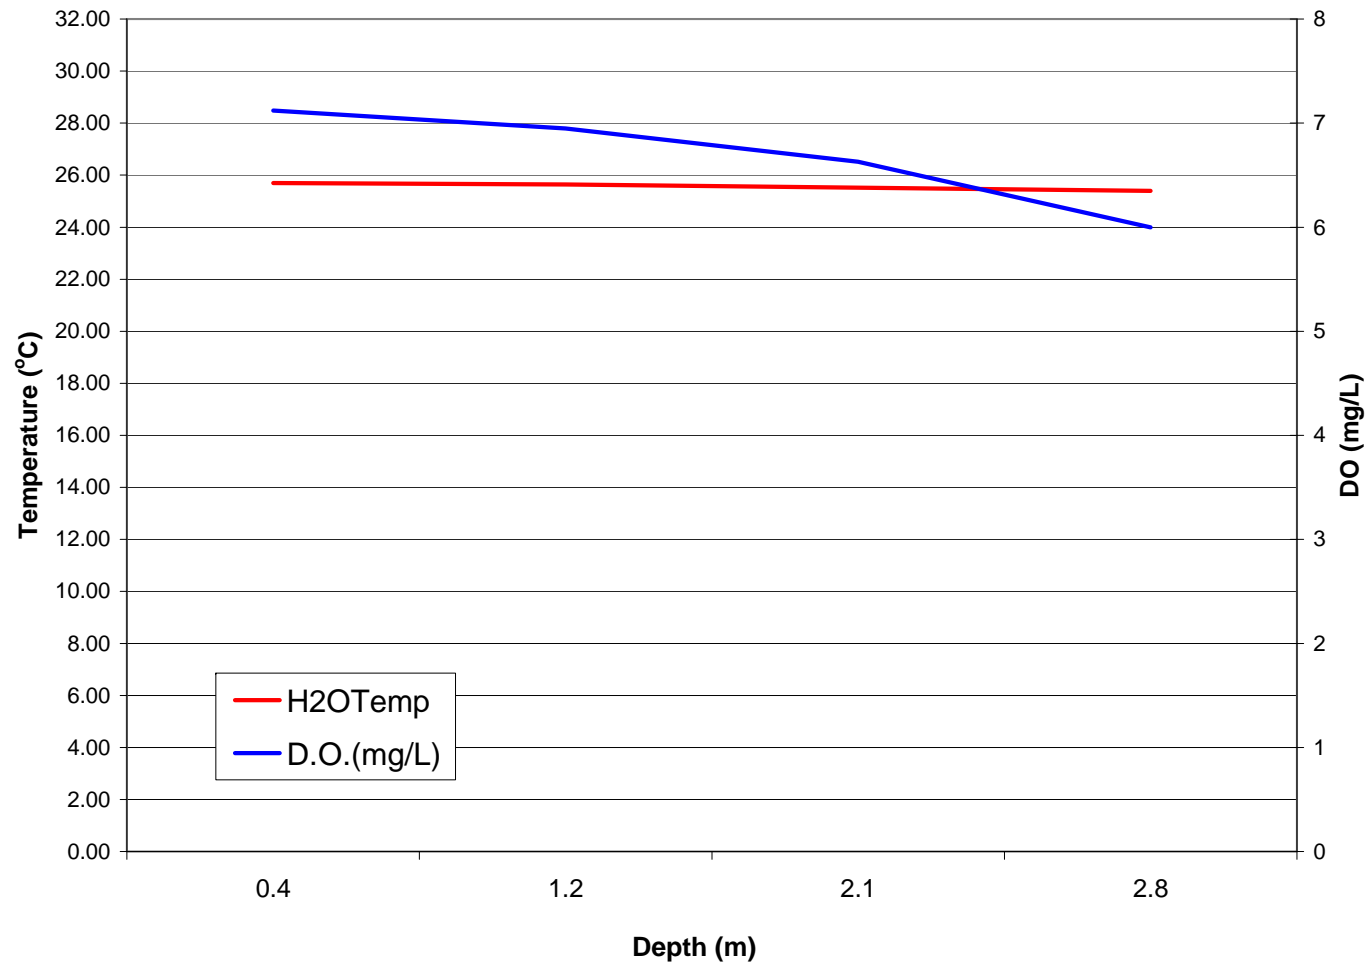


Site 5 Temperature & DO

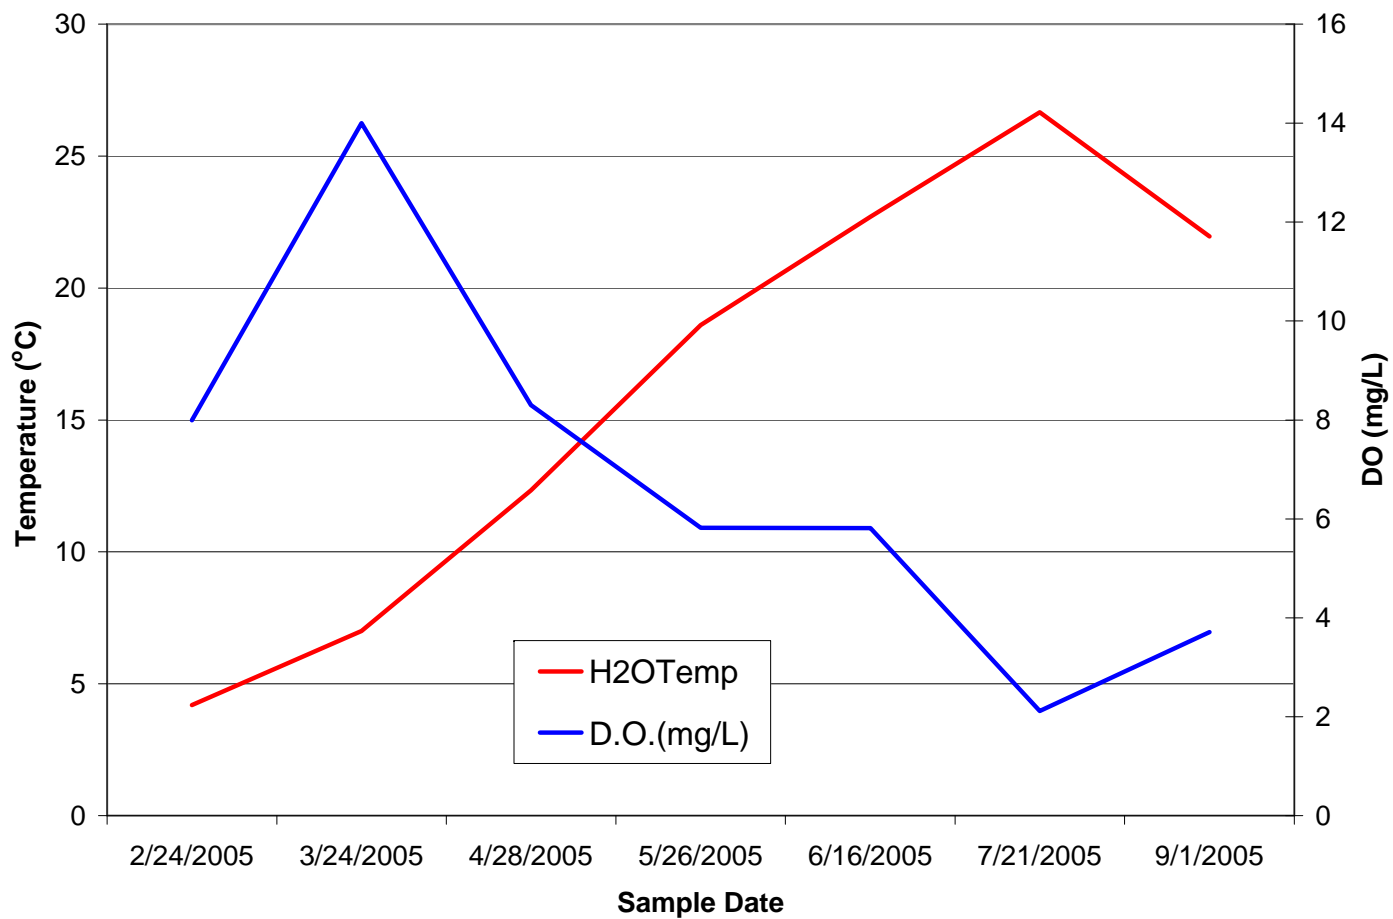


Site 7 Temperature & DO

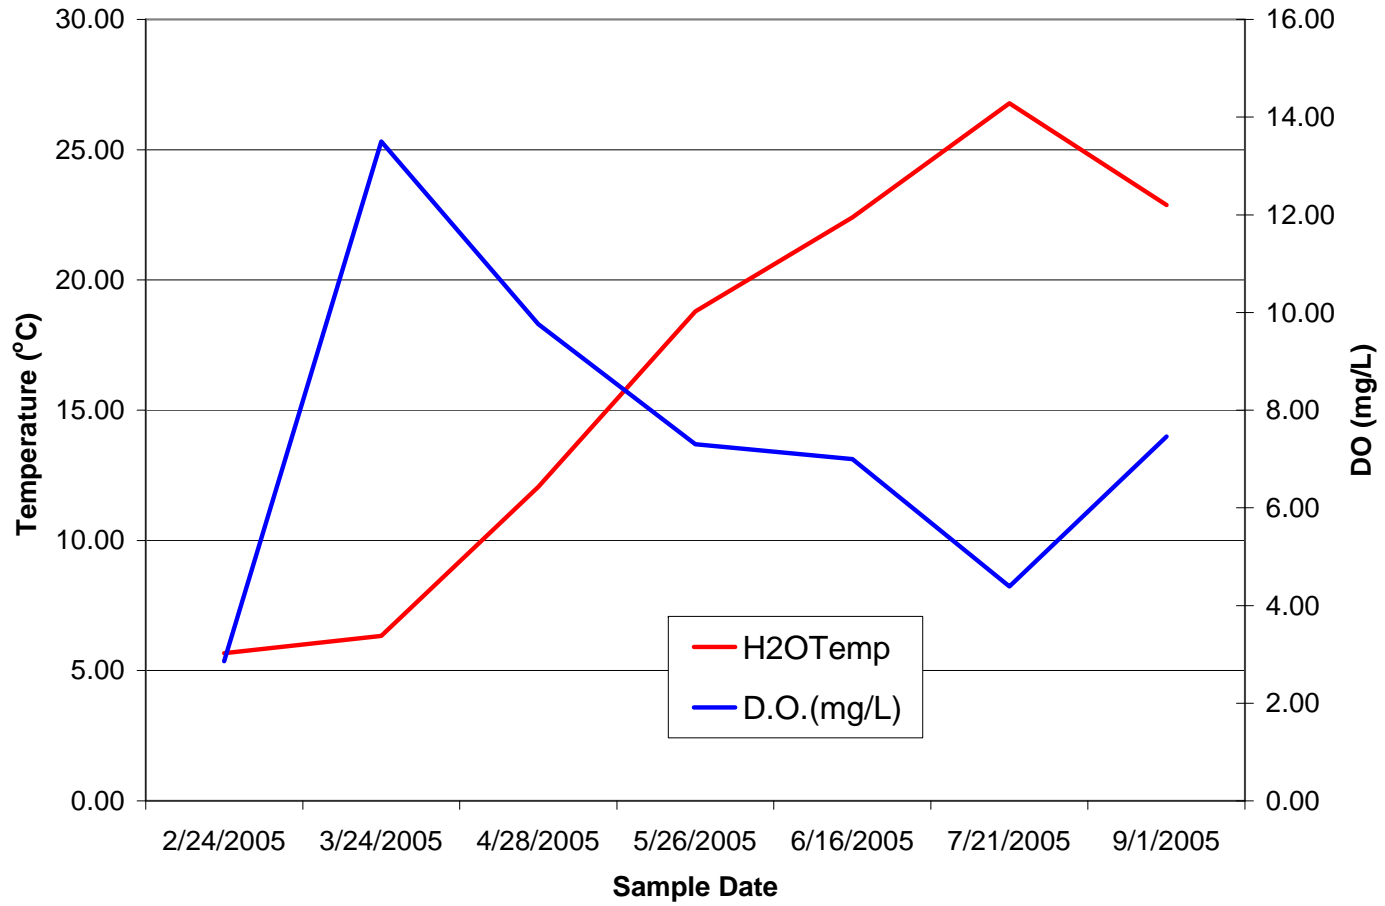


Site 8
Temperature & DO & Depth
September 1, 2005

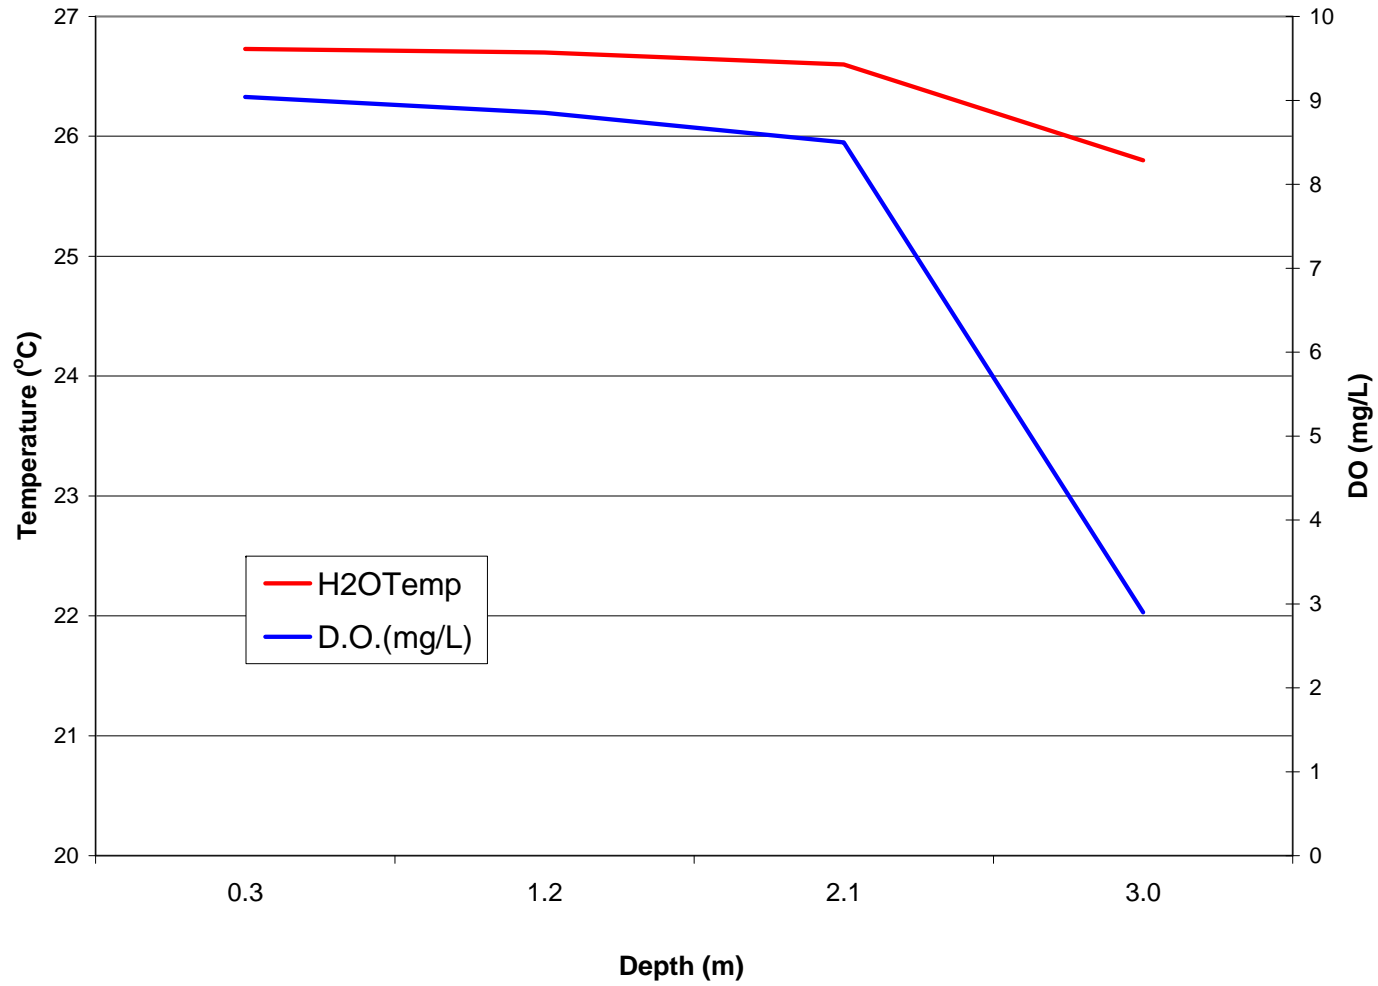


Site 8
Temperature & DO & Depth
March 24, 2005

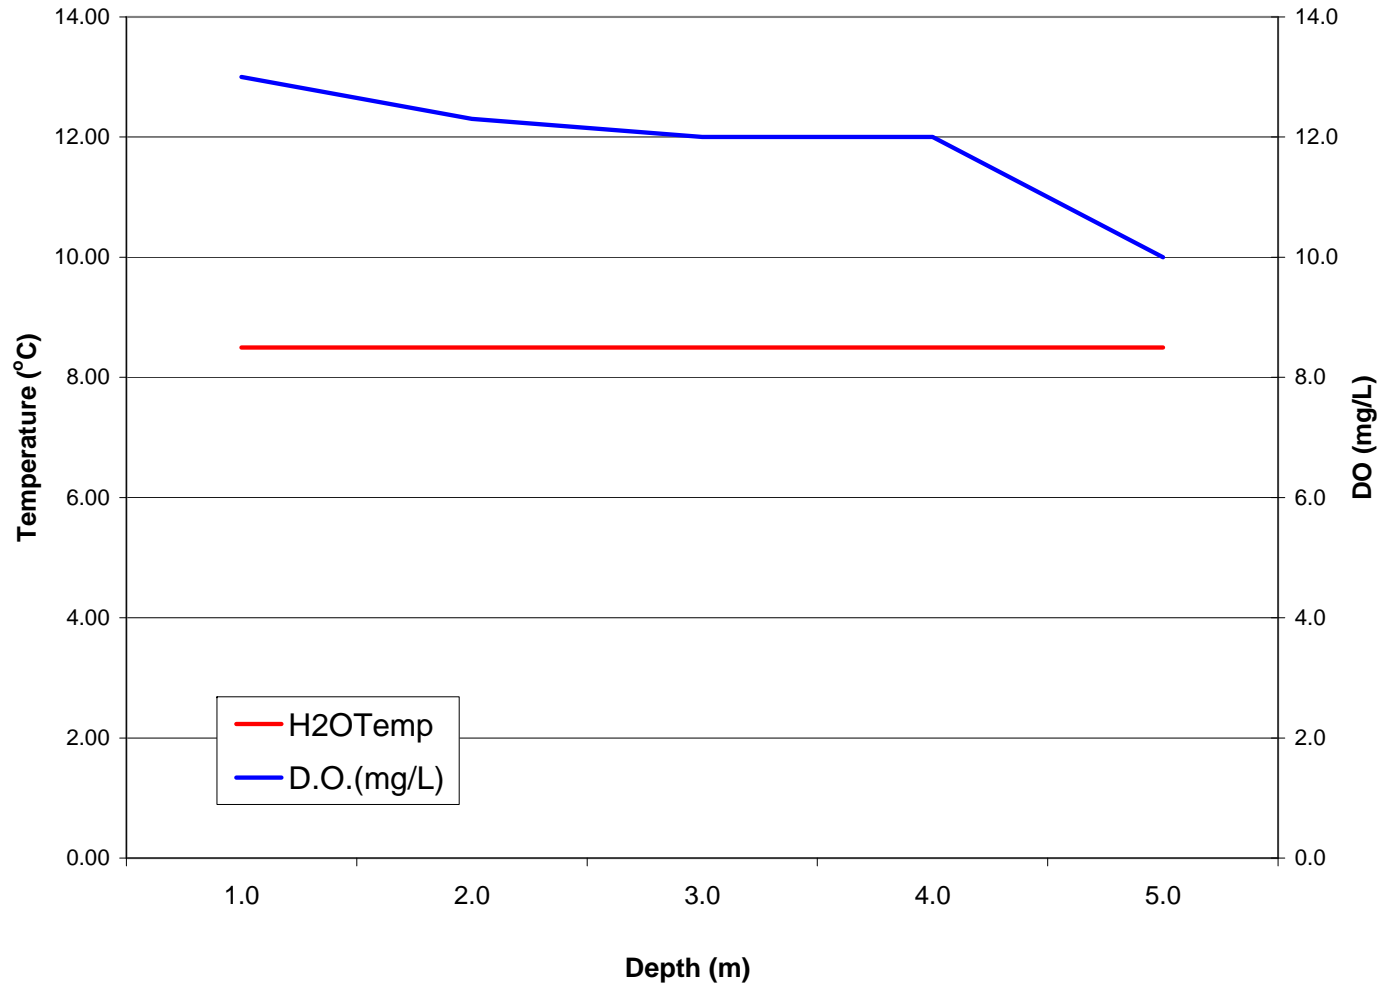


Site 8
Temperature & DO & Depth
April 28, 2005

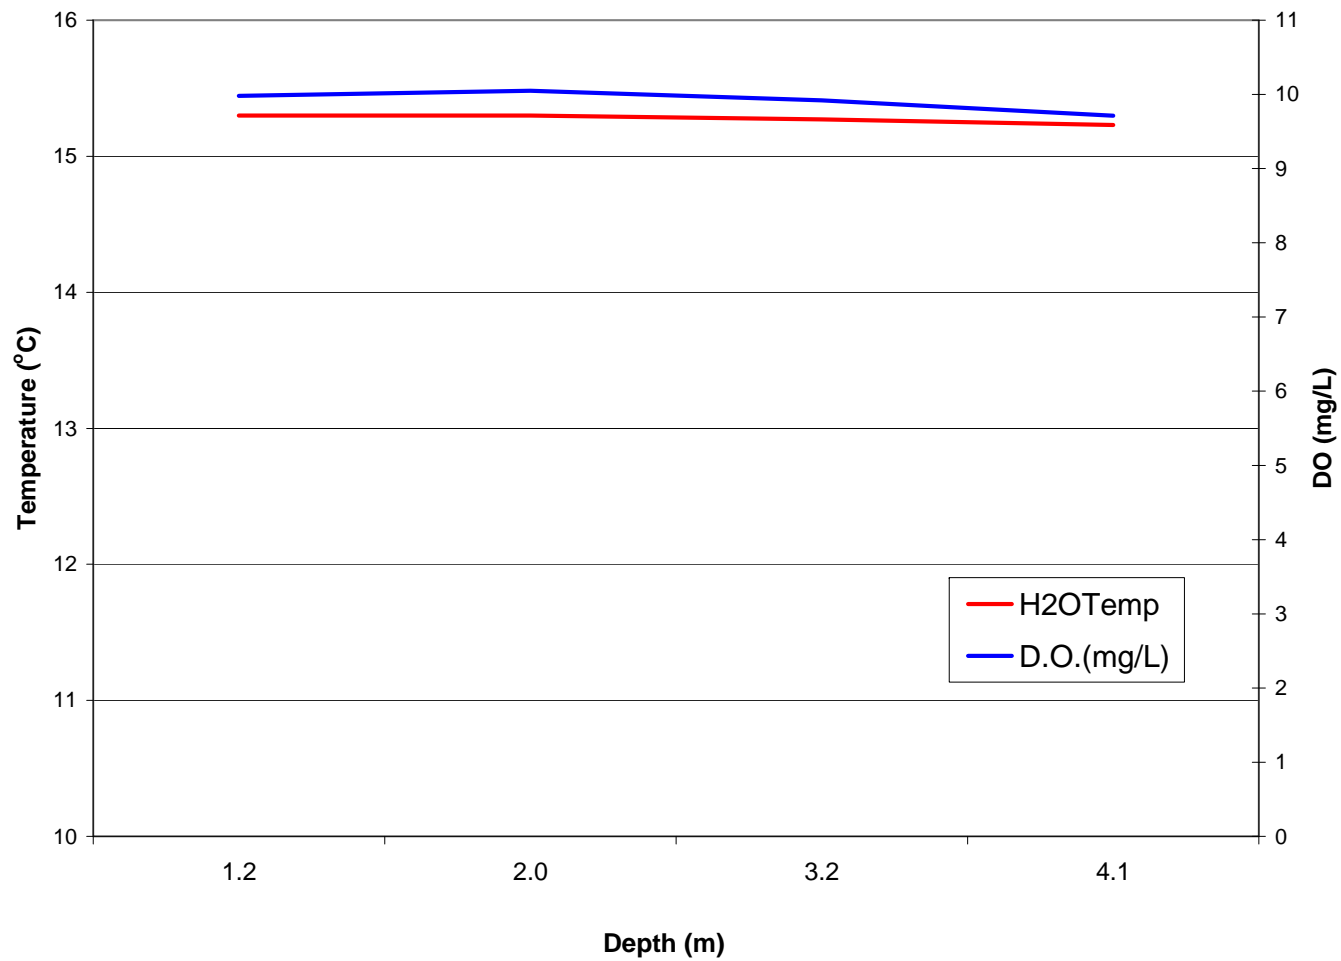


Site 8
Temperature & DO & Depth
May 26, 2005

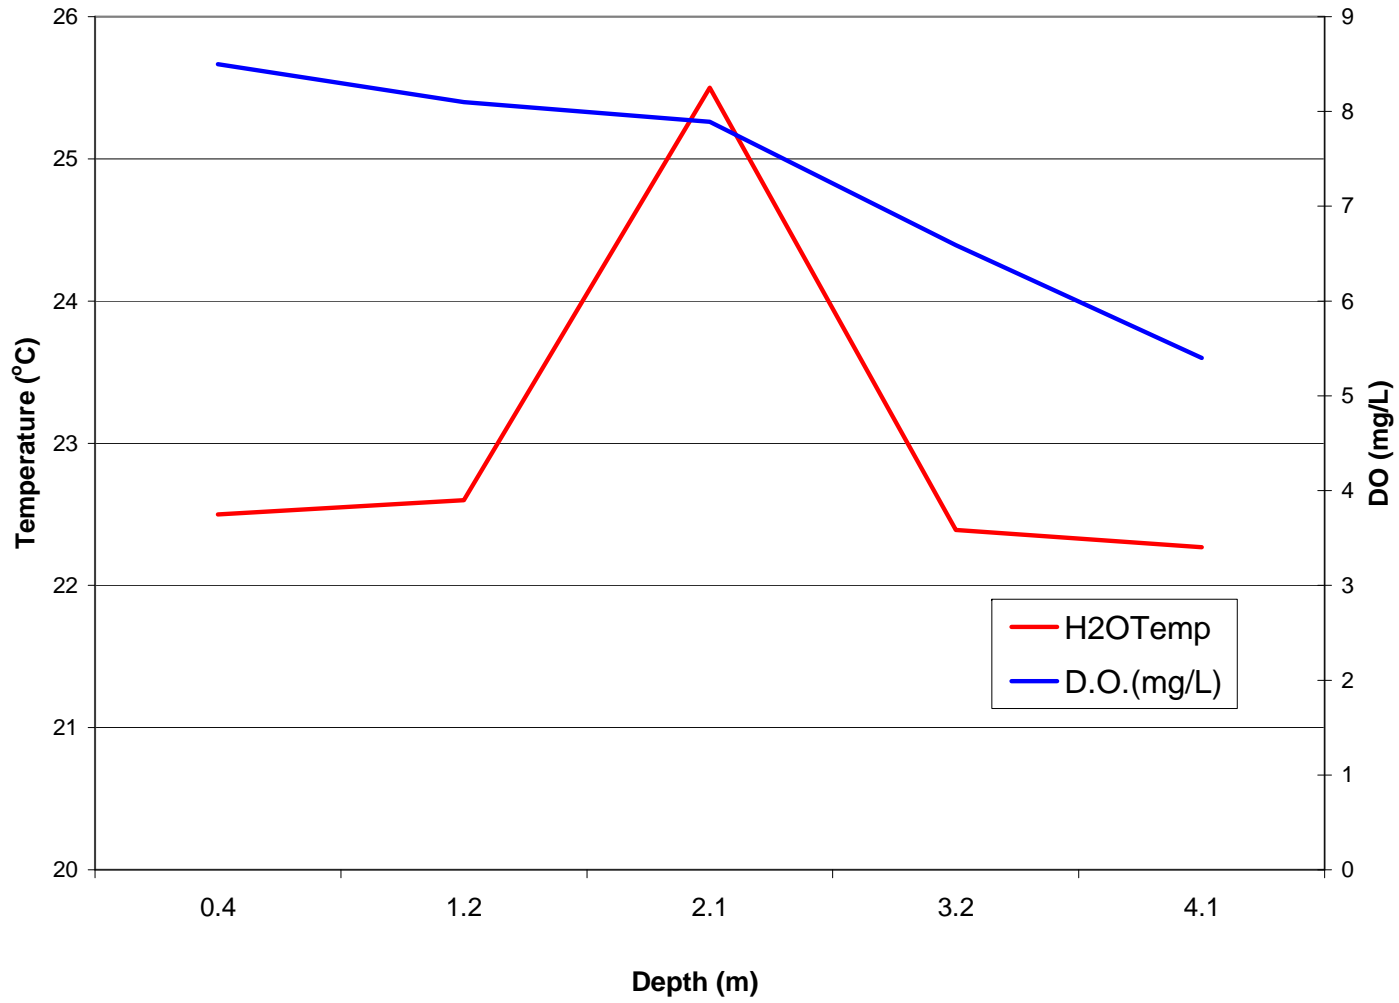


Site 8
Temperature & DO & Depth
June 16, 2005

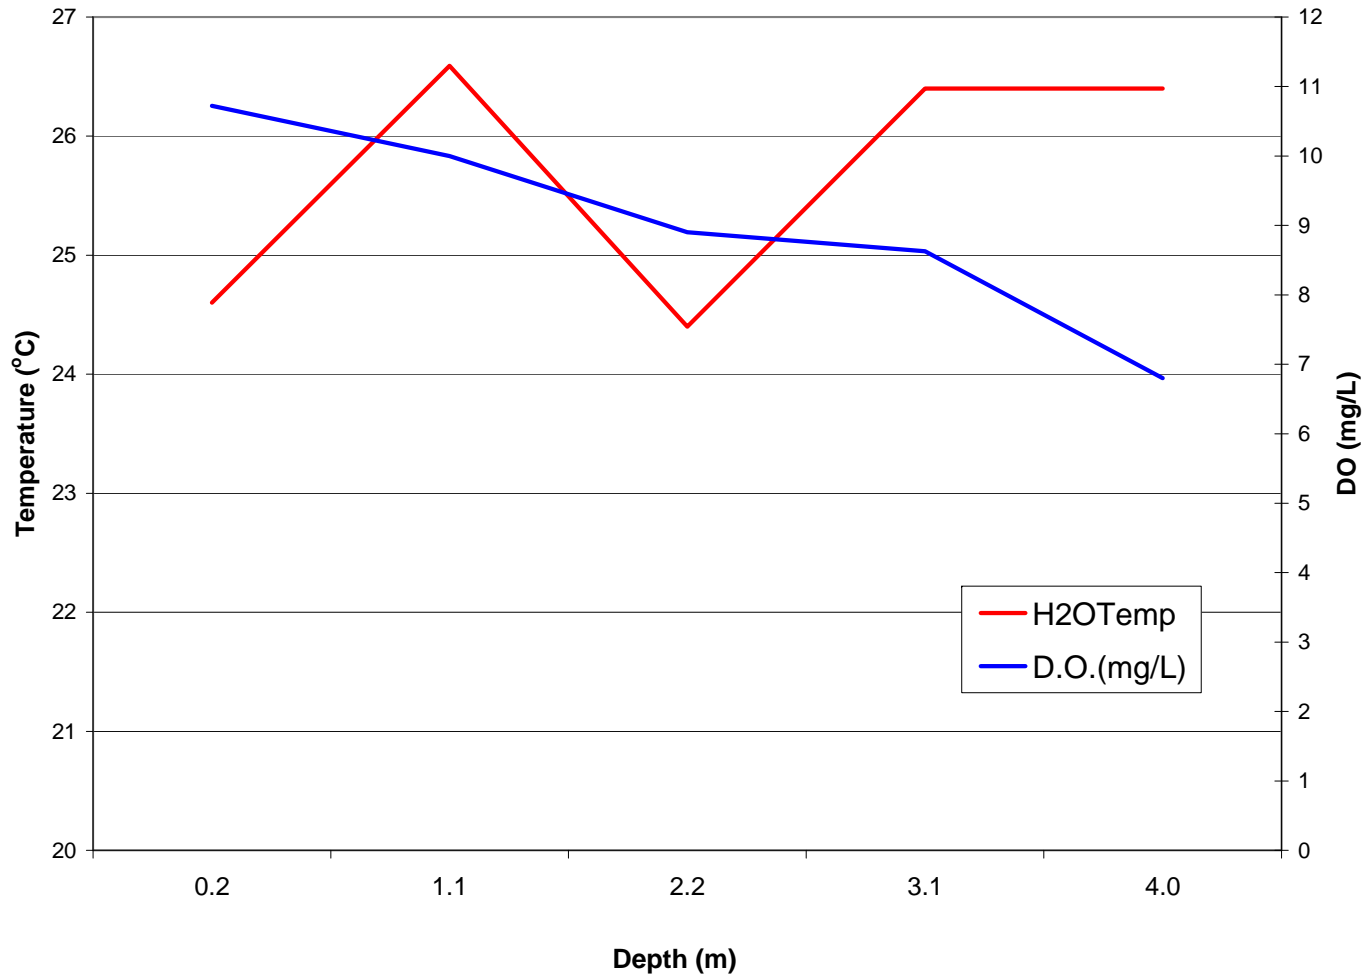


Site 8
Temperature & DO & Depth
July 21, 2005

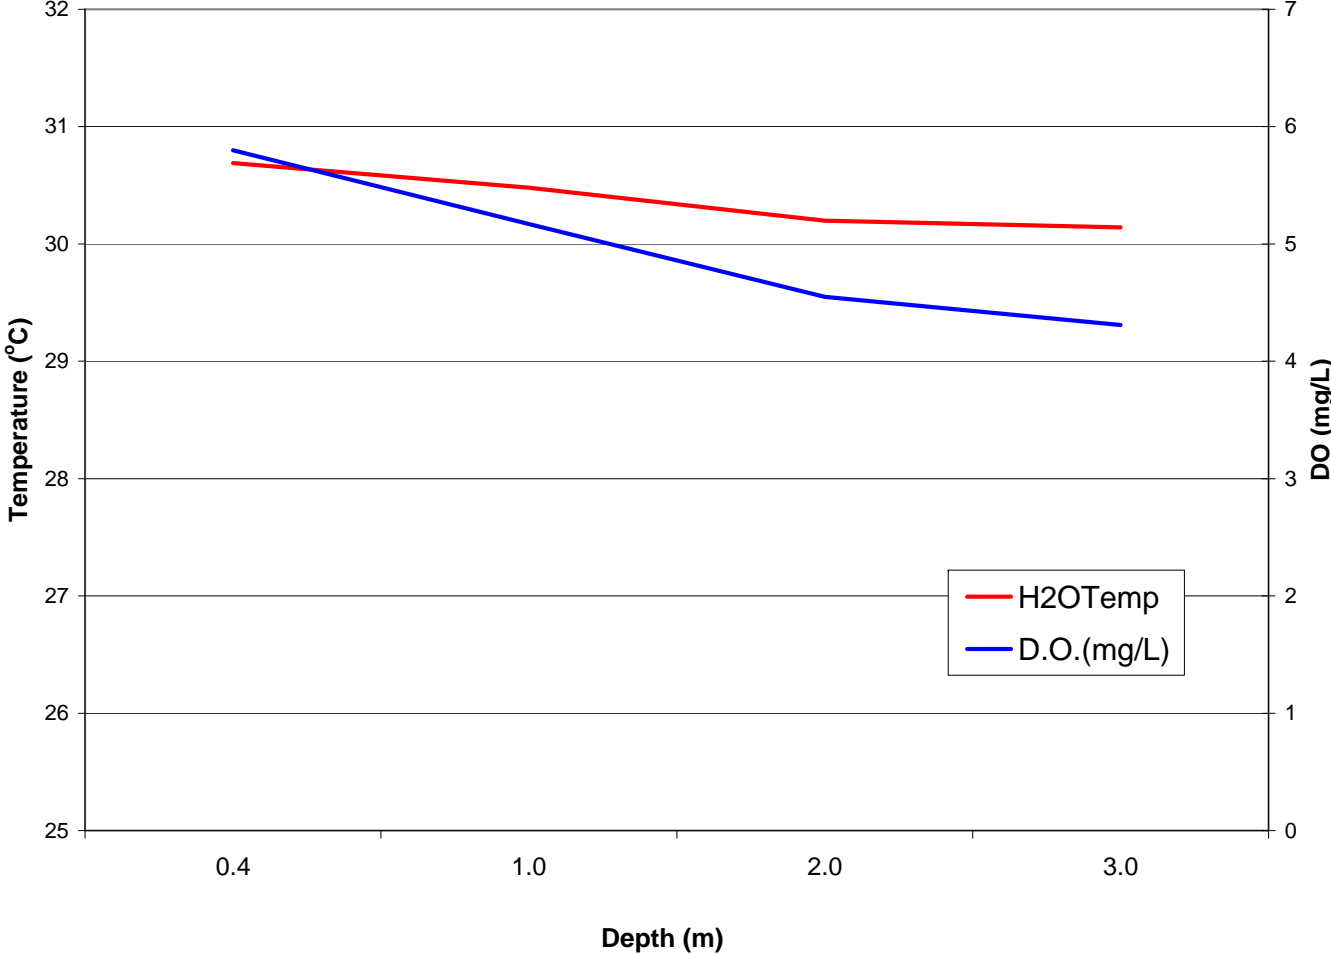


Site 8
Temperature & DO & Depth
September 1, 2005

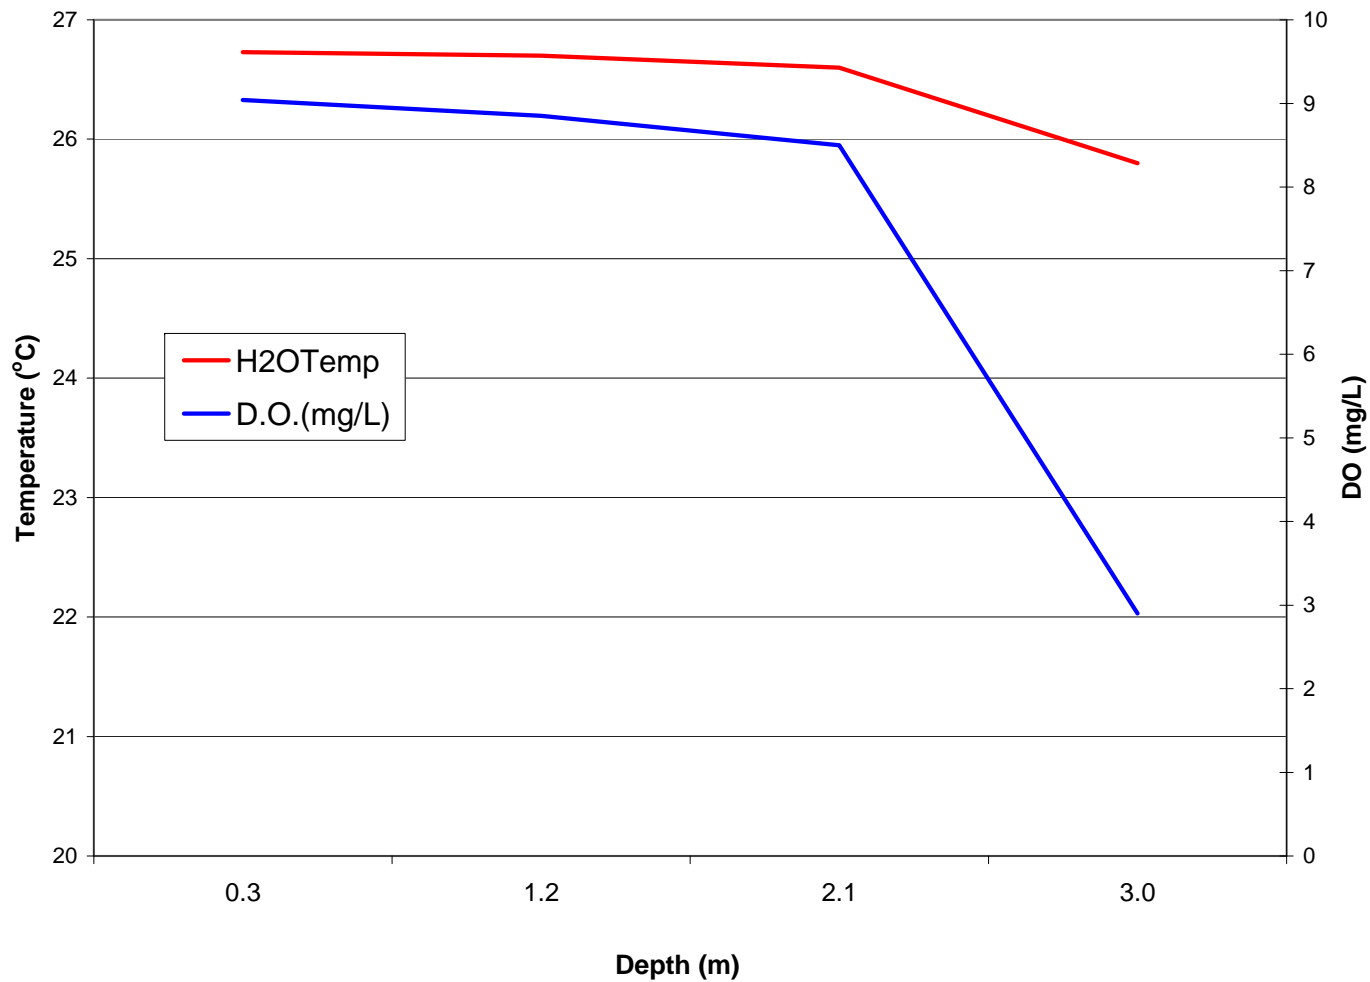


Site 1 TailRace pH

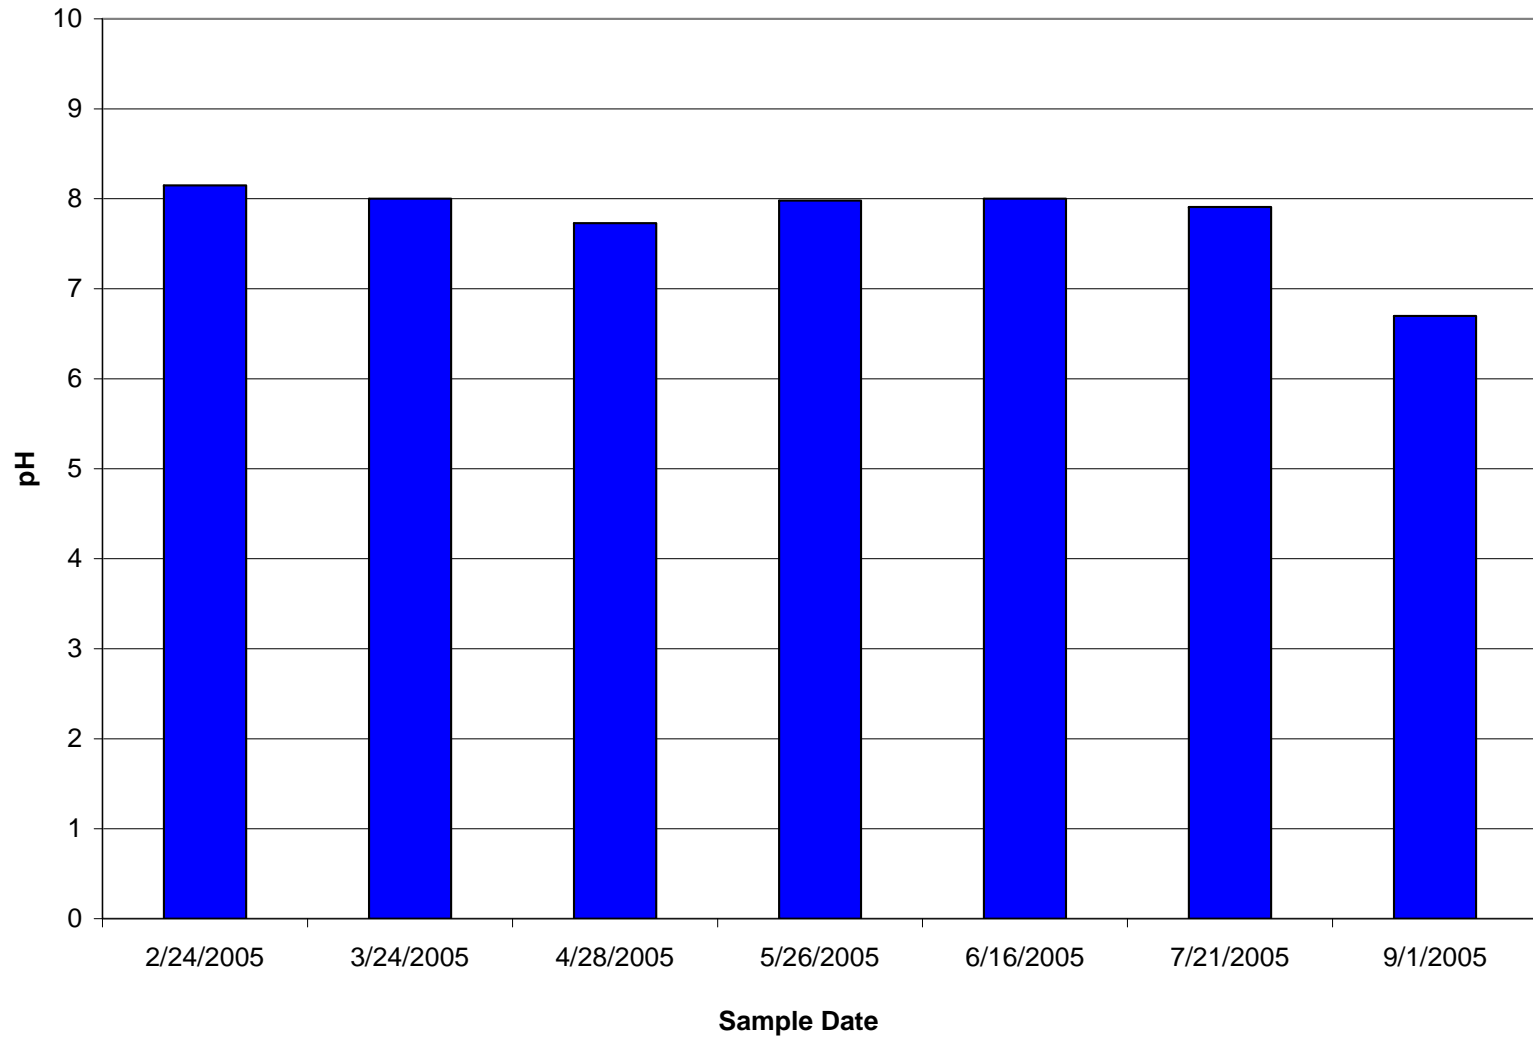


Site 2 Dam Lake Side pH

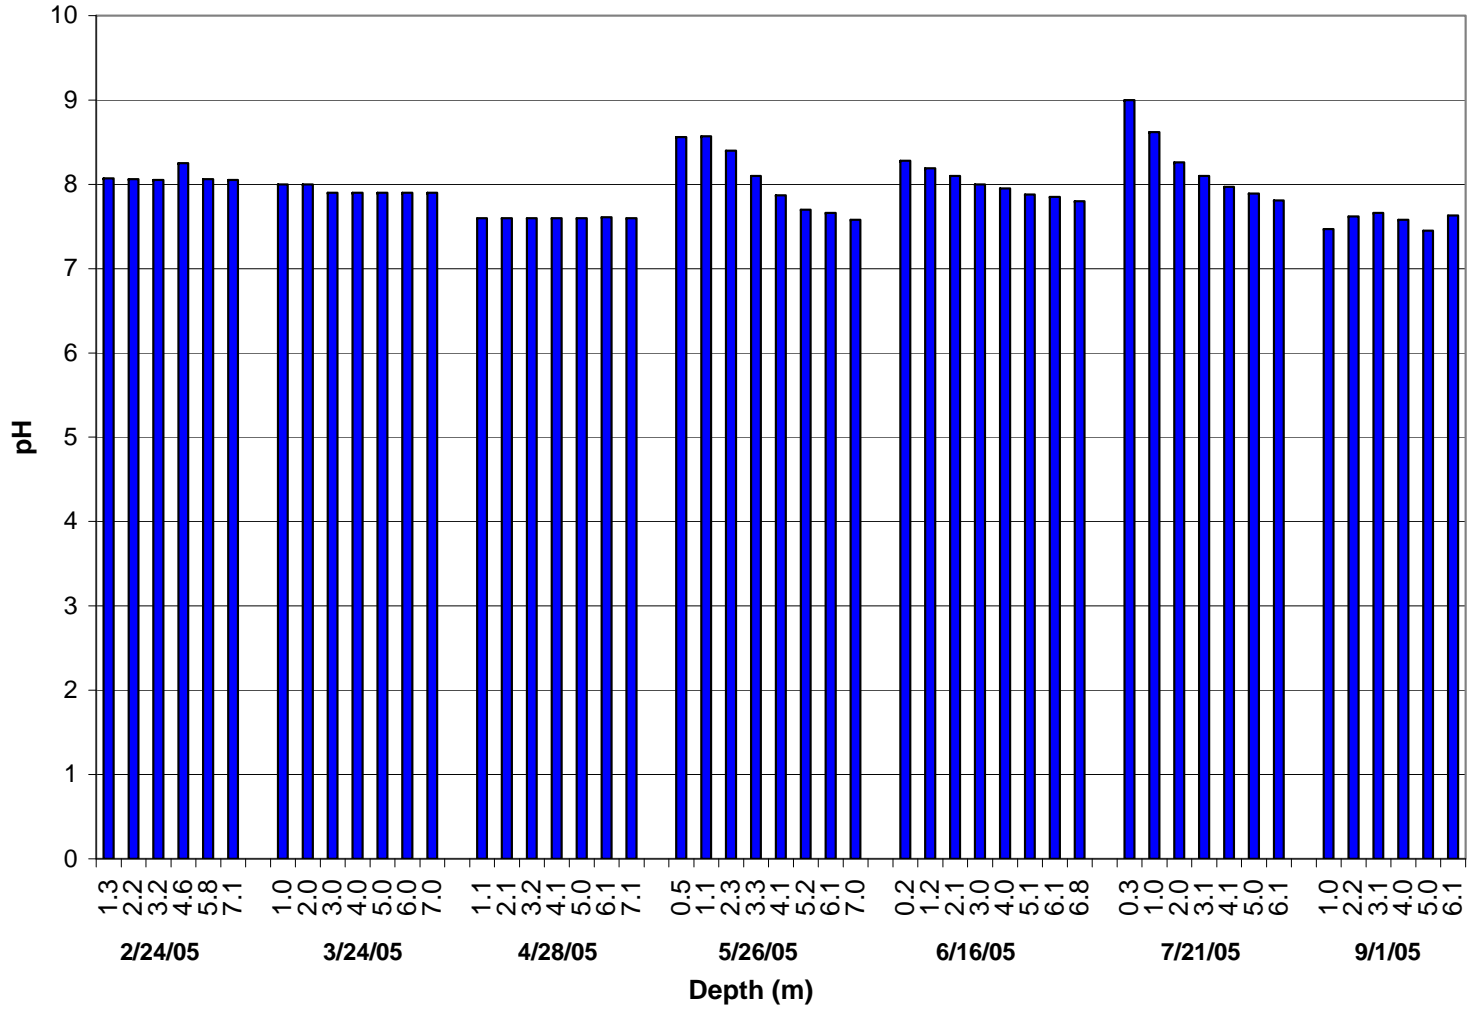


Site 3 Casey Fork Arm pH

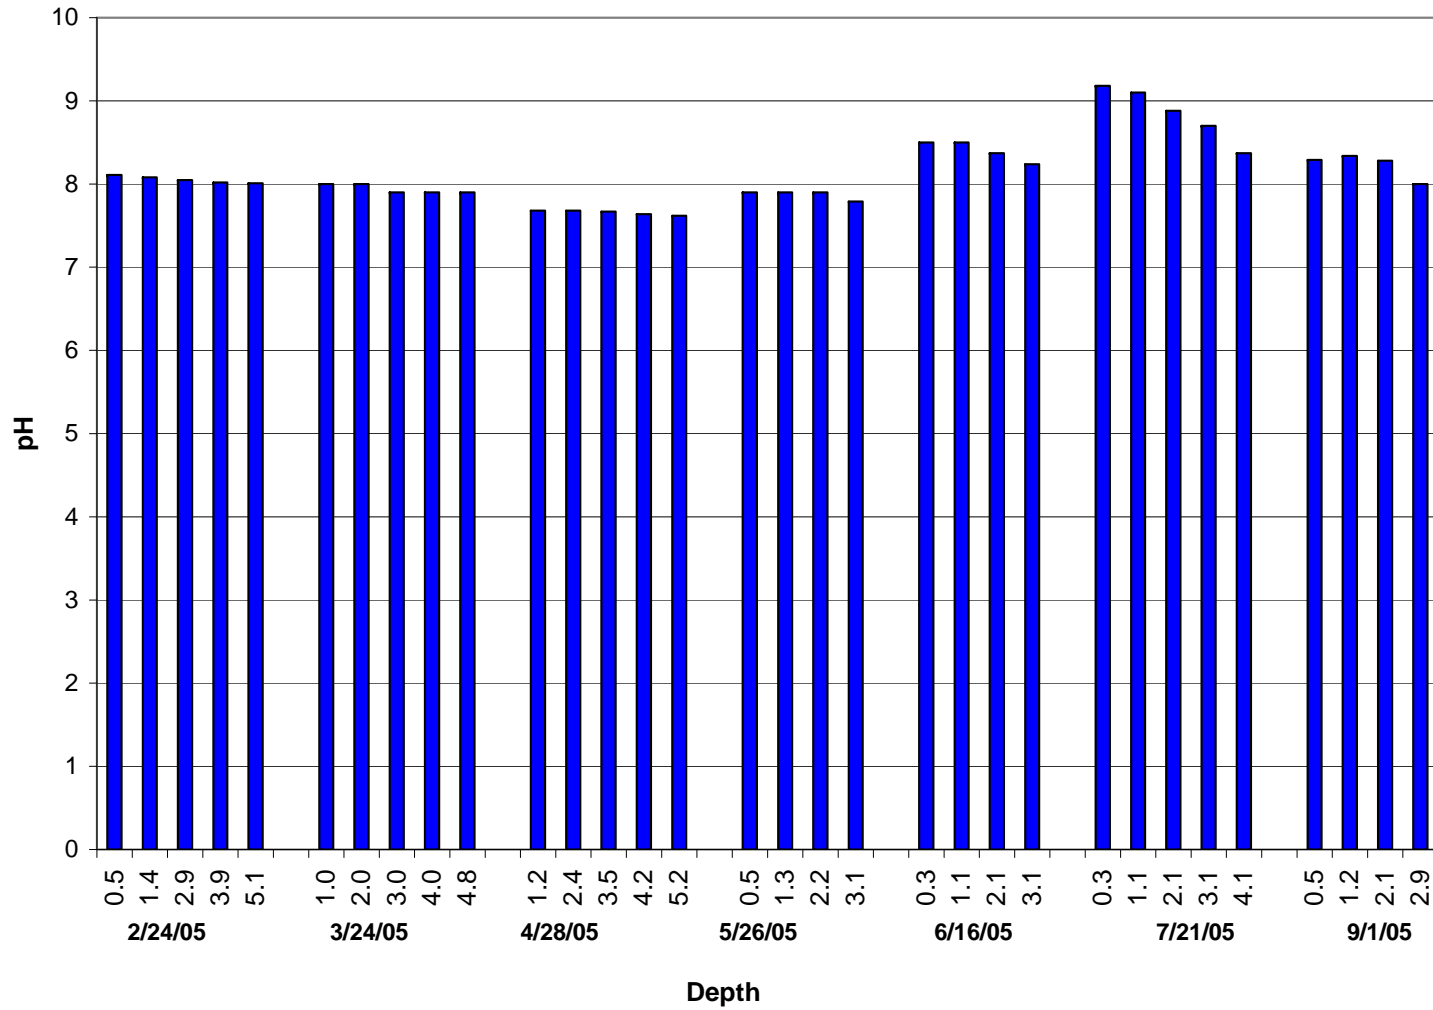


Site 4 Big Muddy Arm pH

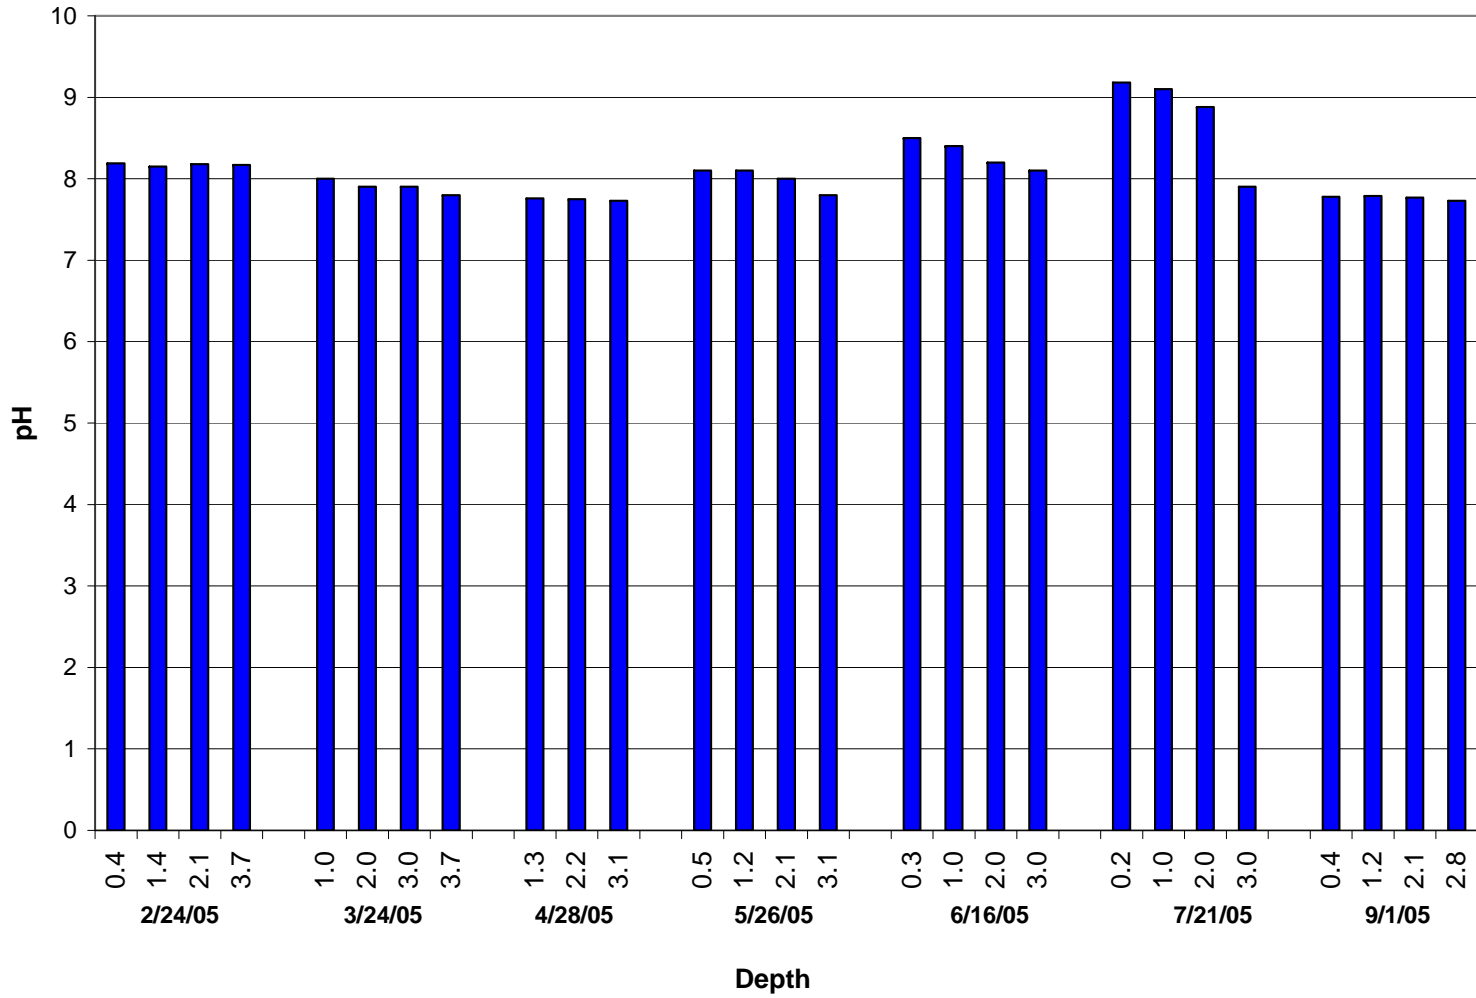


**Site 5 Big Muddy at Hwy 15
pH**

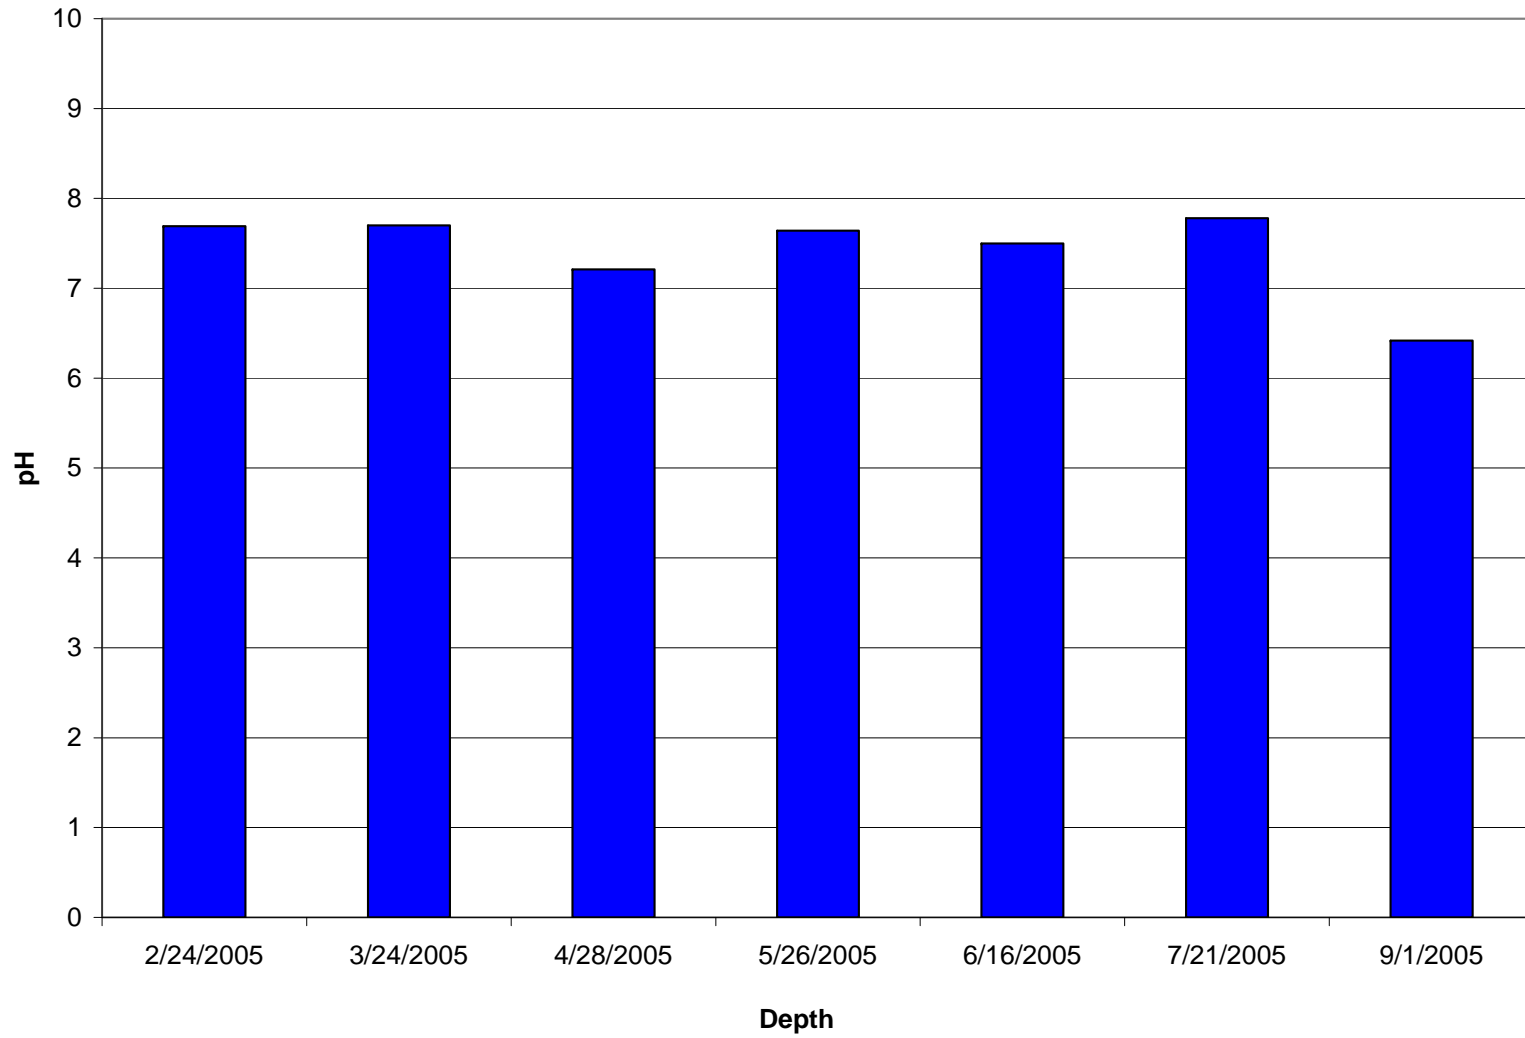

Site 7 Casey Fork at Hwy 37
pH

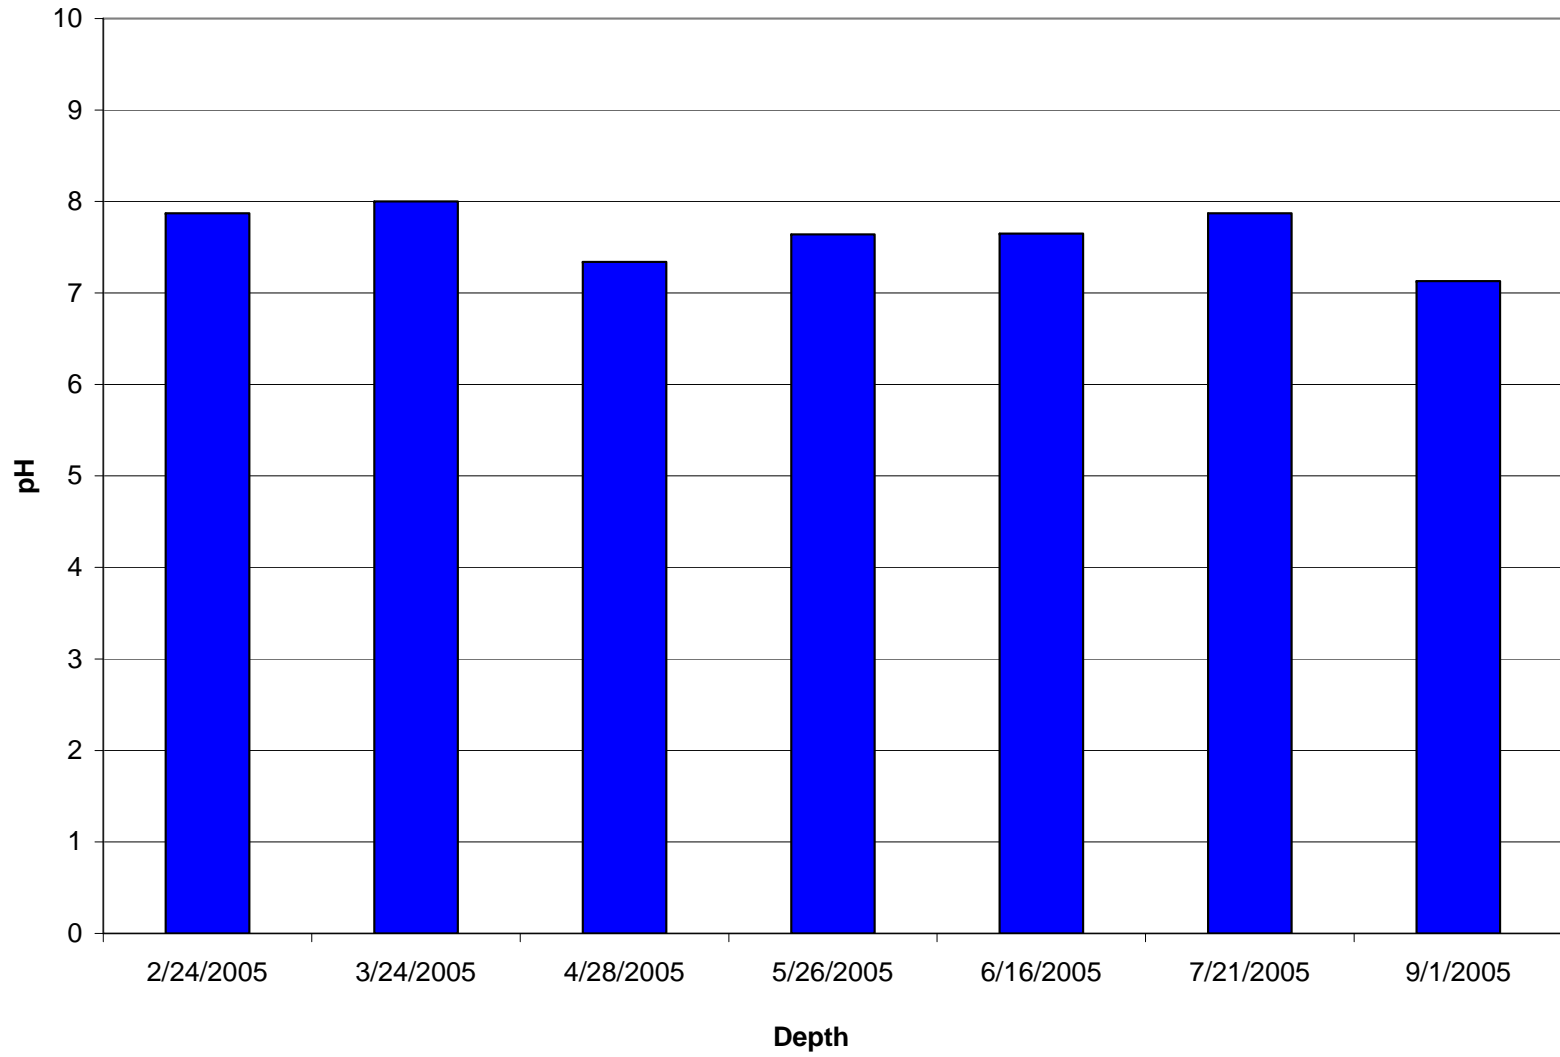


Site 8 Gun Creek Arm pH

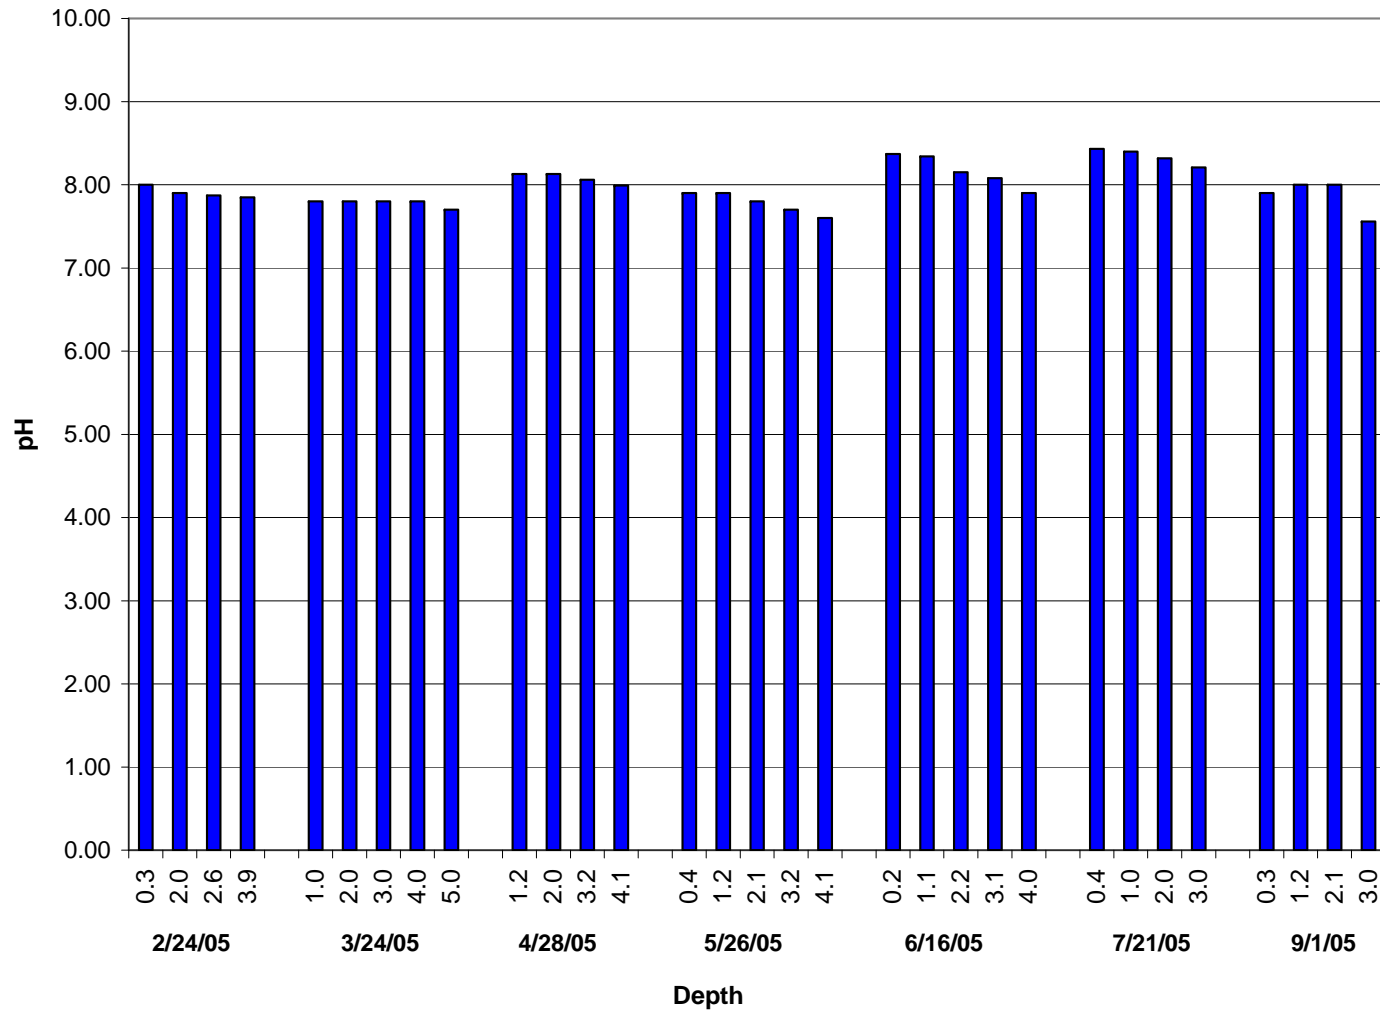


Site 1 Spillway Redox & Conductivity




Site 2 Dam Lake Side
Redox & Conductivity

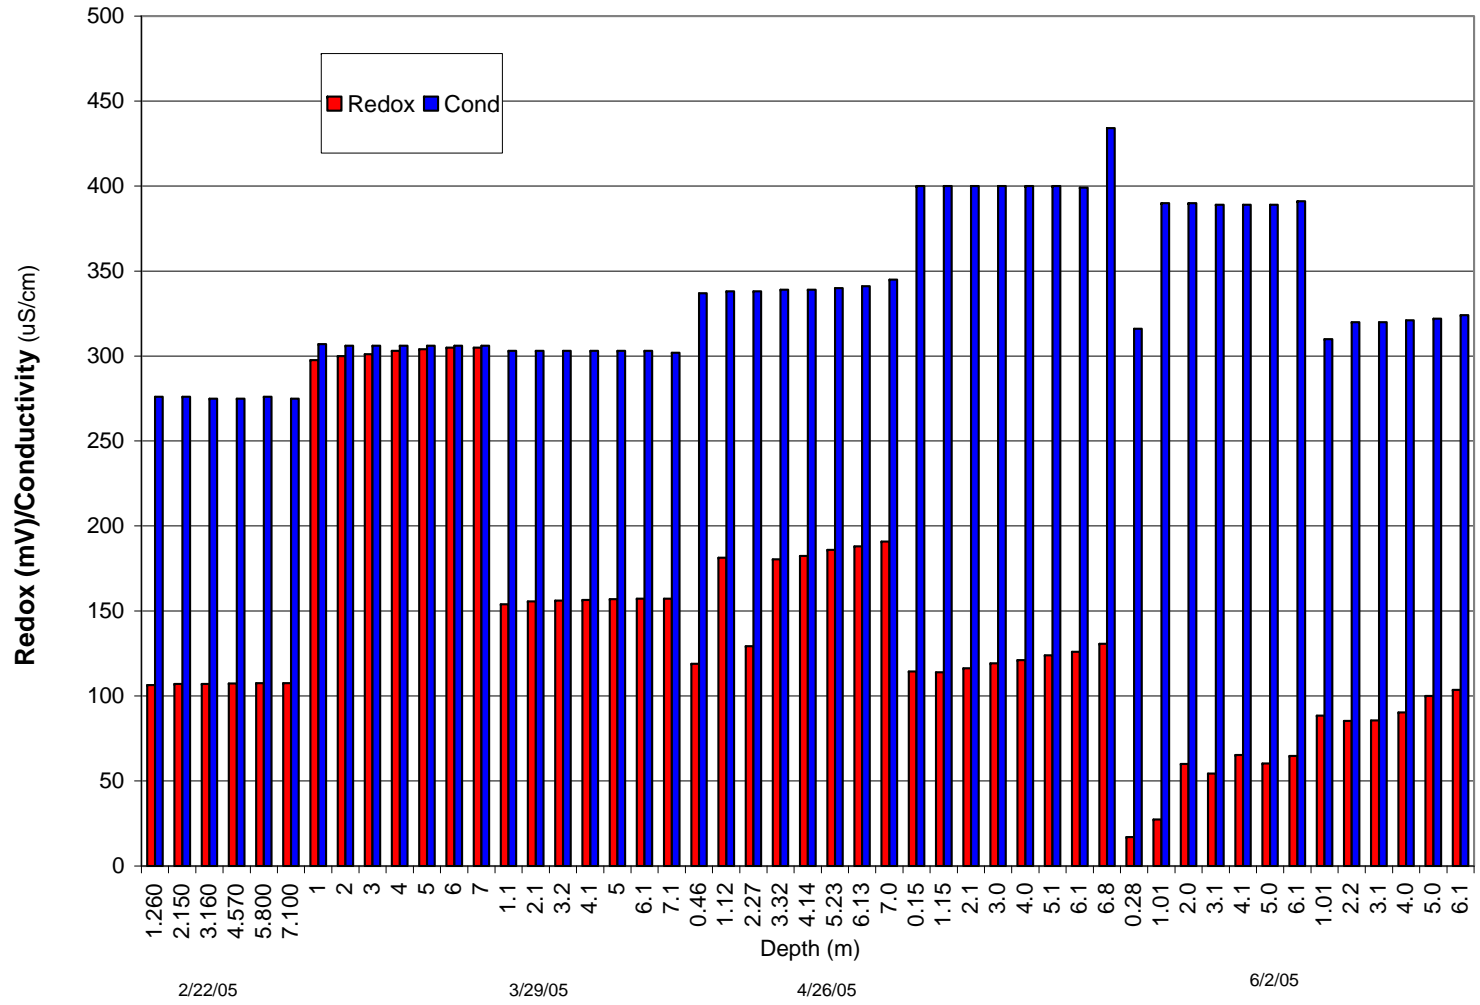


Site 3 Casey Fork Arm Redox & Conductivity

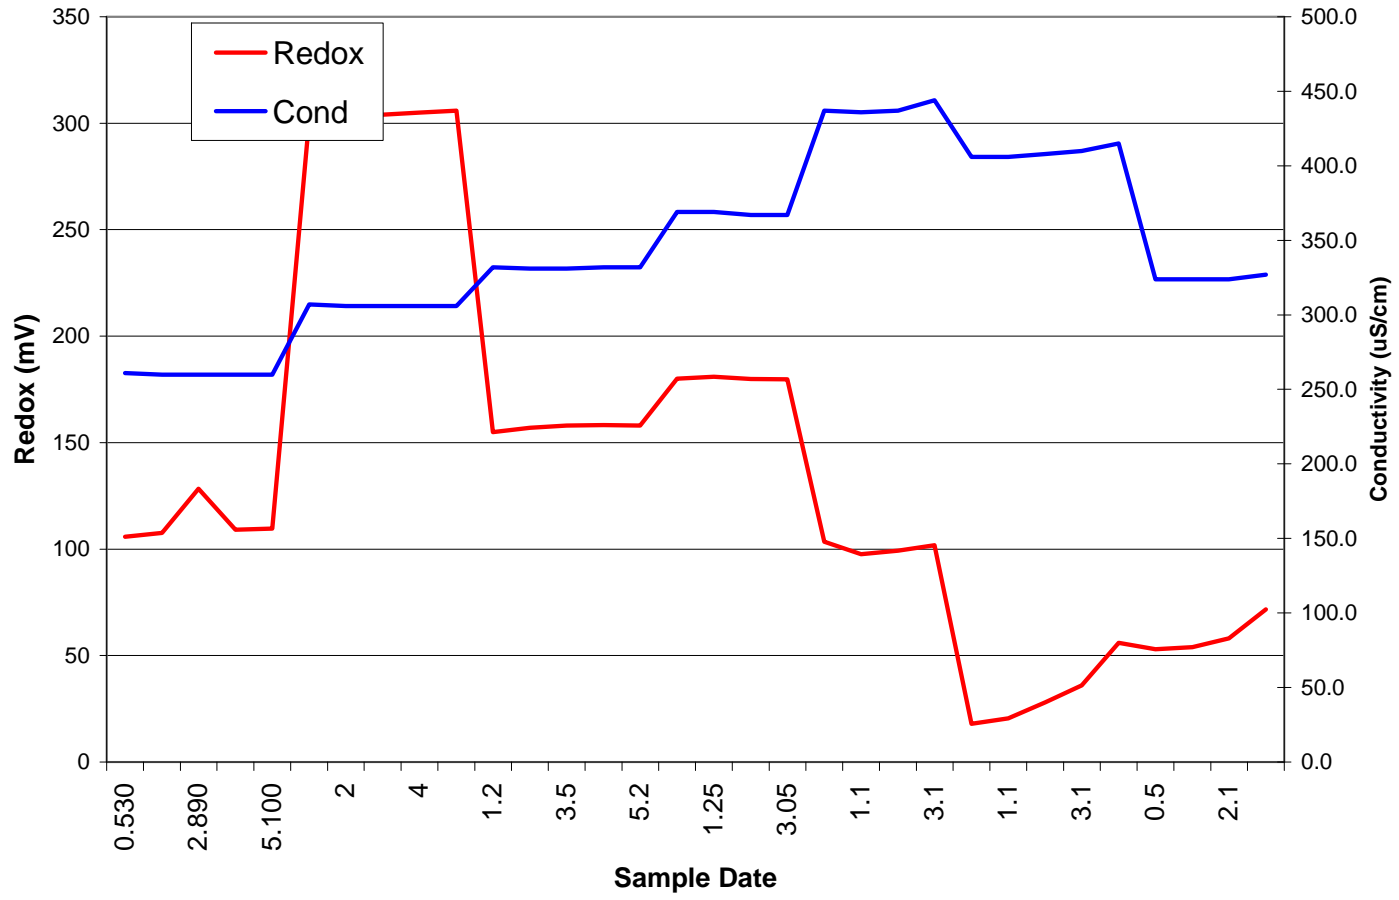


Site 4 Big Muddy Arm
Redox & Conductivity

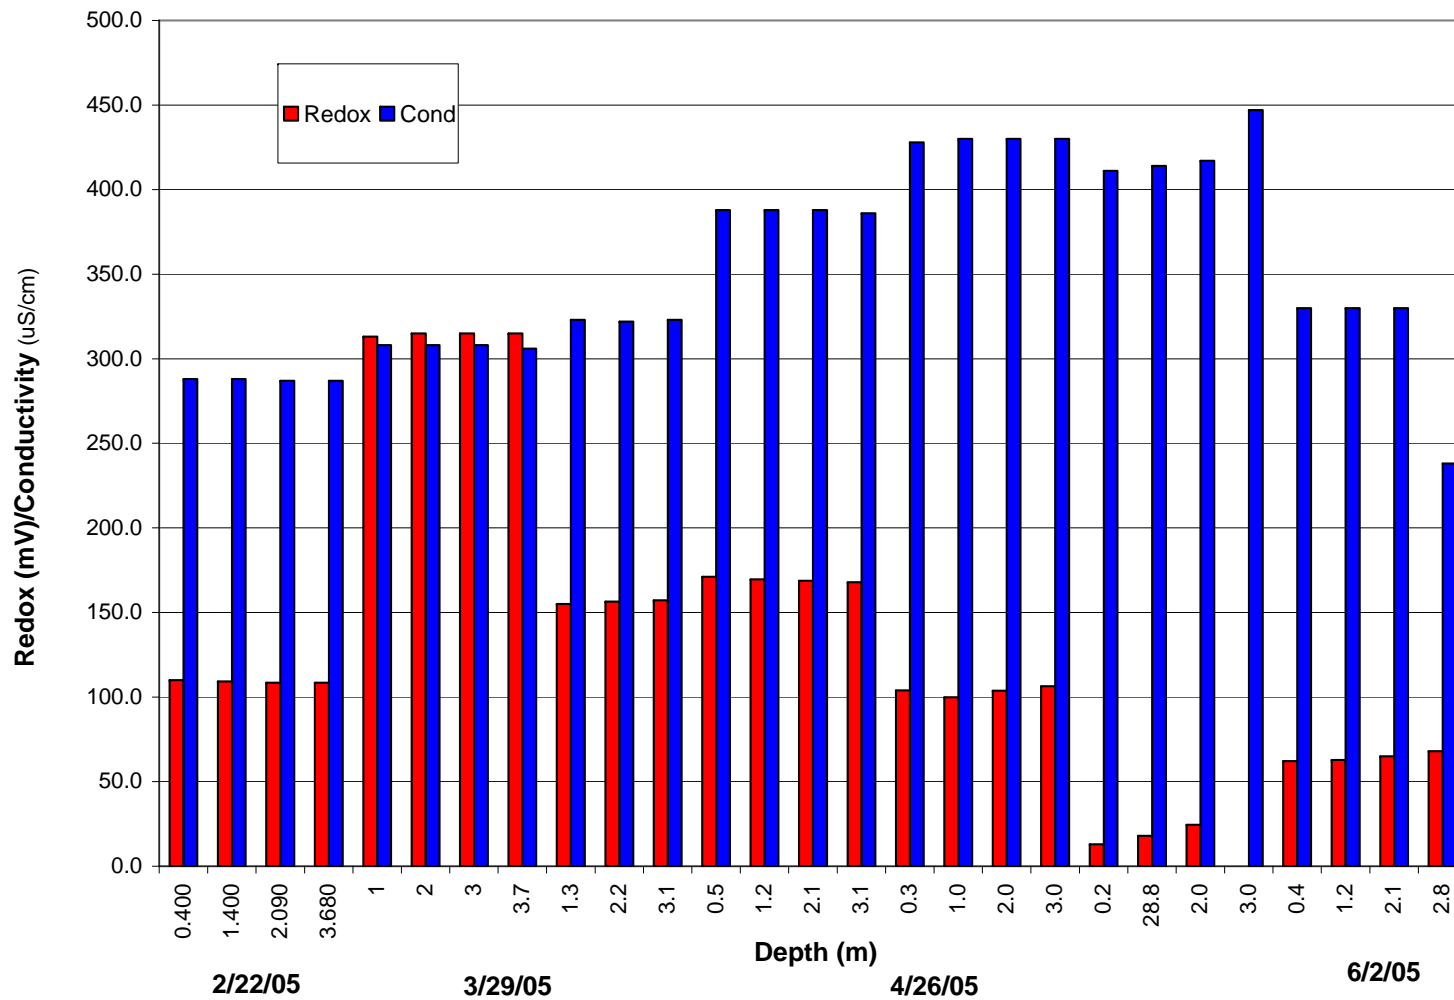


Site 5 Big Muddy at Hwy 15
Redox & Conductivity

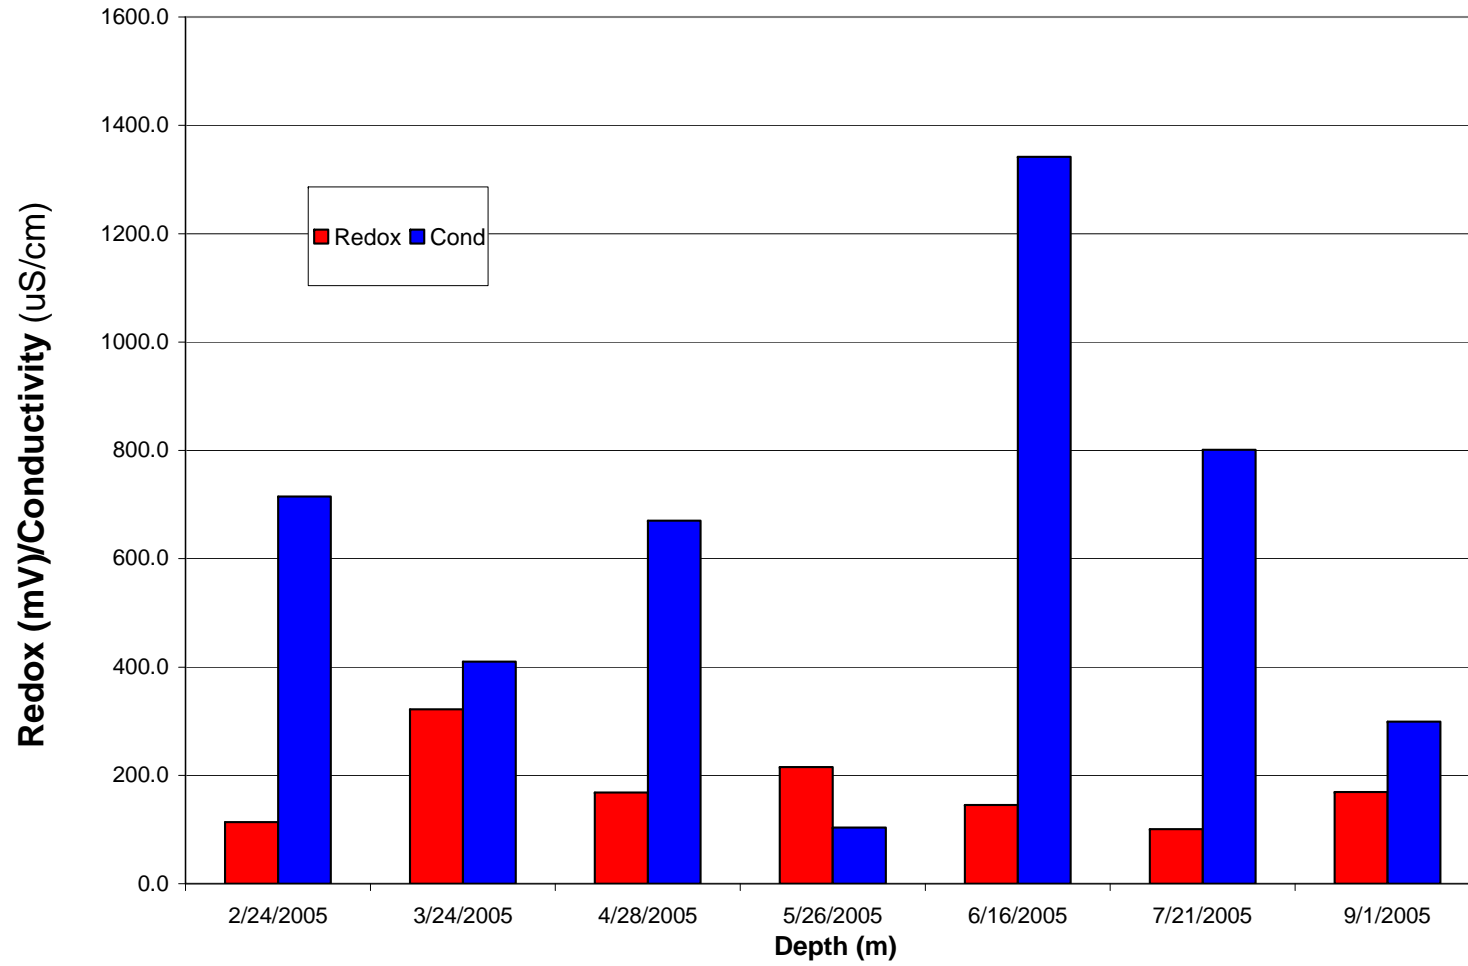

Site 7 Casey Fork at Hwy 37 Redox & Conductivity

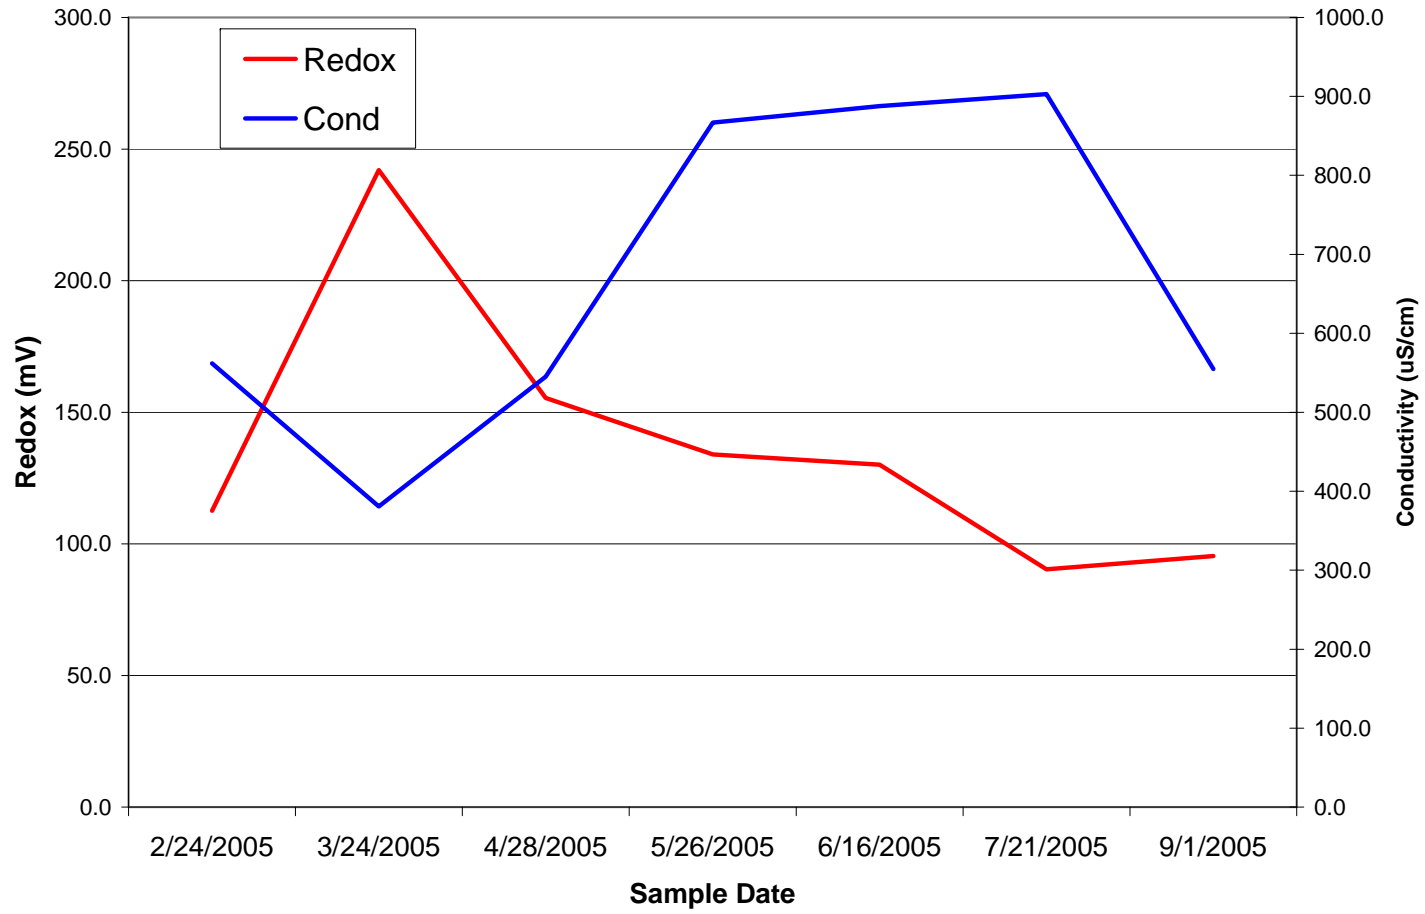

Site 8 Gun Creek Arm
Redox & Conductivity

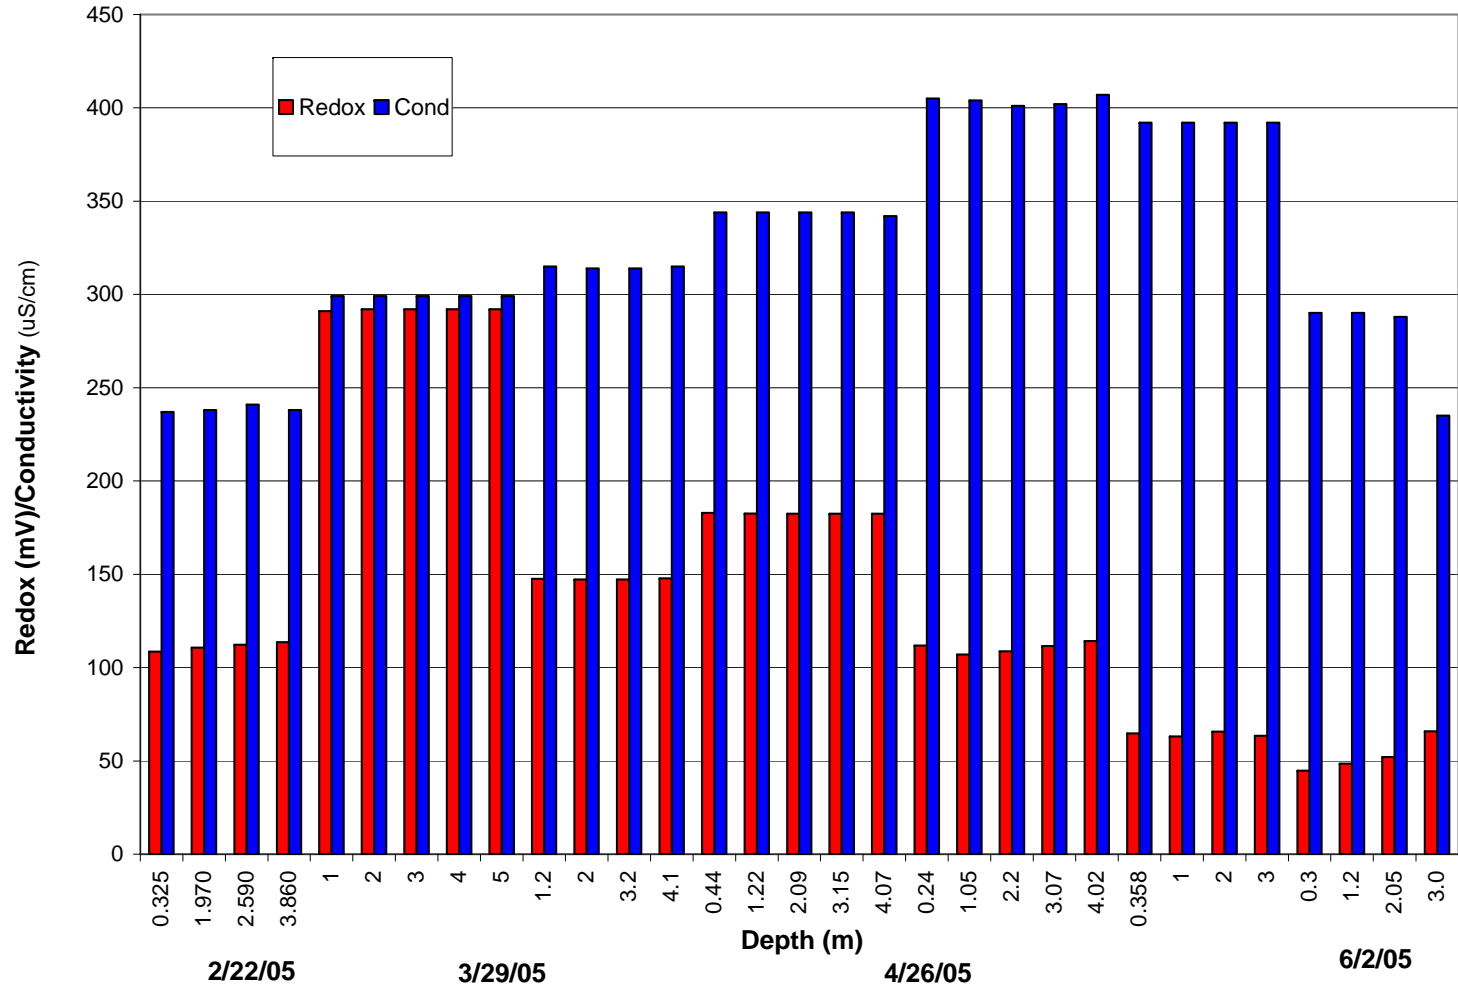

Seechi (in)

