

2012

WAPPAPELLO LAKE

WATER QUALITY

REPORT



U.S. ARMY CORPS OF ENGINEERS, ST. LOUIS DISTRICT
ENVIRONMENTAL ENGINEERING SECTION – WATER QUALITY

Table of Contents

Water Quality Report-Wappapello Lake

Section and Page No.

1.0 GENERAL OVERVIEW.....	pg. 1
2.0 WATER QUALITY ASSESSMENT CRITERIA.....	pg. 4
3.0 SUMMARY OF MONITORING RESULTS.....	pg. 9
4.0 PLANNED 2013 STUDIES	pg. 11

List of Figures & Tables

Figure 1: Lake Map.....	pg. 3
Table 2.1 State of Missouri - Water Quality Standards	pg. 4

Appendix

Appendix A: Data

Lab Data	pg. A1-A6
Field Data	pg. A7-A8

Appendix B: Laboratory Data Graphs

Fecal Coliform	pg. B1
Metals (Iron & Manganese).....	pg. B2
Nitrogen (NH ₃ -N & NO ₃ -NO ₂).....	pg. B3-B4
Orthophosphate & Total Phosphate	pg. B5-B6
Chlorophyll & Pheophytin.....	pg. B7
TSS & VSS	pg. B8-B9
TOC.....	pg. B10-B11

Appendix C: Field Data Graphs

Temperature & DO	pg. C1-C5
Redox & Conductivity	pg. C6-C10
pH.....	pg. C11-C14
Secchi.....	pg. C15

Appendix D: Lakes of Missouri Volunteer Program (LMVP) Data.....	pg. D1
--	--------

Appendix E: Beach Data & Graphs

Beach Data (Peoples, Redman, Rockwood)pg. E1-E2

Executive Summary

The purpose of this report is to provide an annual analysis of the water quality in the lake for the past year. Wappapello Lake is located on the upper St. Francis River in Wayne County, Missouri. The dam is located at river mile 213.2, 16 miles northeast of Poplar Bluff, Missouri, and regulates the drainage of 1,310 square miles. The area consists mainly of rugged upland terrain. Approximately 45% of the watershed upstream of the lake is included within the boundaries of the Mark Twain Forest and about 20% is privately owned woodland.

Approximately 11% is used for the production of crops which consists of hay, small grains, and corn. Eight percent is used as pasture and the remaining 16% is roads, lakes, railroads and urban areas. The lake levels range from 31,100 acre-feet of water which covers 5,200 acres at conservation pool to 613,300 acre-feet which cover 23,200 acres at flood pool. Wappapello Dam and lake was authorized for downstream flood control by the Flood Control Act of 1936.

The water of Wappapello Lake and the downstream river channel is generally good. The lake is a medium depth reservoir nestled in the Ozark Hills. The lake tends to stratify during the summer months.

All sampling sites met the appropriate state standards during 2012 except the phosphorous levels. Phosphorous levels at the lake sites except site 6 have exceeded the state standard on a routine basis. Generally the tailwater levels are lower than the incoming tributary flows, which indicates that the lake is sinking the phosphorous. This is also occurring with nitrogen. The project area has little pollution potentials at present time, no major form of degradation to the lake or streams is apparent. Constant water quality monitoring will continue to check future degradation of the watershed.

WATER QUALITY MONITORING PROGRAM

1.0 GENERAL OVERVIEW

This report summarizes water quality activities of the St. Louis District for Fiscal Year 2012 in accordance with ER 1110-2-8154 Water Quality & Environmental management for Corps Civil Works Projects and ETL 1110-2-362 Environmental Engineering Initiatives for Water Management.

Water quality monitoring remains one of the Sections major responsibilities in the area of environmental stewardship. The objective is to maintain a reasonable environmental monitoring program for the Mississippi River and the 5 lakes under the St. Louis District's control. The District's reservoirs consist of Mark Twain and Wappapello Lakes in Missouri, and Shelbyville, Carlyle and Rend Lakes in Illinois. Water quality sampling is conducted within the lakes and their tributaries to establish trend analysis and maintain water quality at or above state and federal regulations.

The main objective is to provide technical expertise of an environmental nature to all Corps elements requesting assistance in accordance with ER 1110-2-8154. This would include updating the water quality management priorities for the district's projects to ensure water quality meets the state and federal regulations, for protection of human health and the environment, and for the safety and economic welfare of those at Corps projects. Ongoing goals include ensuring that downstream water quality meets all state and federal regulations, is suitable for aquatic and human life, and continue to evaluate trend analysis in relation to baseline conditions at all projects.

Water quality data is provided to the Missouri Department of Natural Resources (MDNR) to be used as a screening mechanism for the Missouri Water Quality Report which is required every two years by the Clean Water Act Sections 303(d) and 305(b). MDNR does not routinely monitor Wappapello Lake, however the University of Missouri-Columbia has been taking 4 samples per year in the forebay at the lake since 1989.

The National Water Quality Inventory Report to Congress (305(b) report) is the primary vehicle for informing Congress and the public about general water quality conditions in the United States. This document characterizes our water quality, identifies widespread water quality problems of national significance, and describes various programs implemented to restore and protect our waters.

Under Section 303(d) of the 1972 Clean Water Act, states, territories and authorized tribes are required to develop a list of water quality limited segments. These waters on the list do not meet water quality standards, even after point sources of pollution have installed the minimum required levels of pollution control technology. The law requires that these jurisdictions establish priority rankings for water on the lists and develop action plans, called as Total Maximum Daily Loads (TMDL), to improve water quality.

The 2012 water quality report compiled by the Missouri Department of Natural Resources has removed the upper St. Francis River from the impaired list. Wappapello Lake is listed as eutrophic. Continued monitoring of the lake and its tributaries is vital in assisting the future assessment of the lake for these and other possible impairments. The water quality monitoring program represents the single metric that encompasses the overall health of the watershed as it is a direct measure of how well the environmental stewardship programs are working.

1.1 INTRODUCTION

Wappapello Lake is located on the upper St. Francis River in southeastern Missouri and is primarily utilized as a recreational lake. Lake Wappapello is an 8,400 acre reservoir located in Wayne County, with the southern arms reaching into Butler County. Construction of this lake began in September of 1938 and was completed in June 1941. Approximately 71% of Lake Wappapello's large, 1,310 square mile watershed is forested and 21% is covered by grassland. The surrounding lands are residential with little agricultural use due to the steep terrain.

Nestled in the foothills of the Ozark Mountains, Wappapello Lake offers activities for all walks of life. Over 44,000 acres of public lands and water welcome hunting, fishing, swimming, boating, camping and picnicking. Interpretation of the natural resources through trails, Visitor Center exhibits and various programs highlight the natural beauty found in Southeast Missouri.

The operating purposes of Wappapello Lake are fishing, hunting and other wildlife activities as well as recreation uses, such as boating and swimming. The area around the lake has camping sites and nature trails. The water quality management program for the lake includes monitoring baseline parameters and ecological trends as well as investigating problem areas to keep the lake within state and federal standards.

The water quality monitoring program was conducted during 2012 at five lake sites to assure that safe conditions were maintained for human recreation, wildlife and aquatic life. One of the five sites was selected as a quality control duplicate site during each sampling event and was denoted as WAP-15. Three water quality sampling events took place during 2012, between April and October. The locations of the 5 sampling sites are depicted on the lake map in Figure 1.

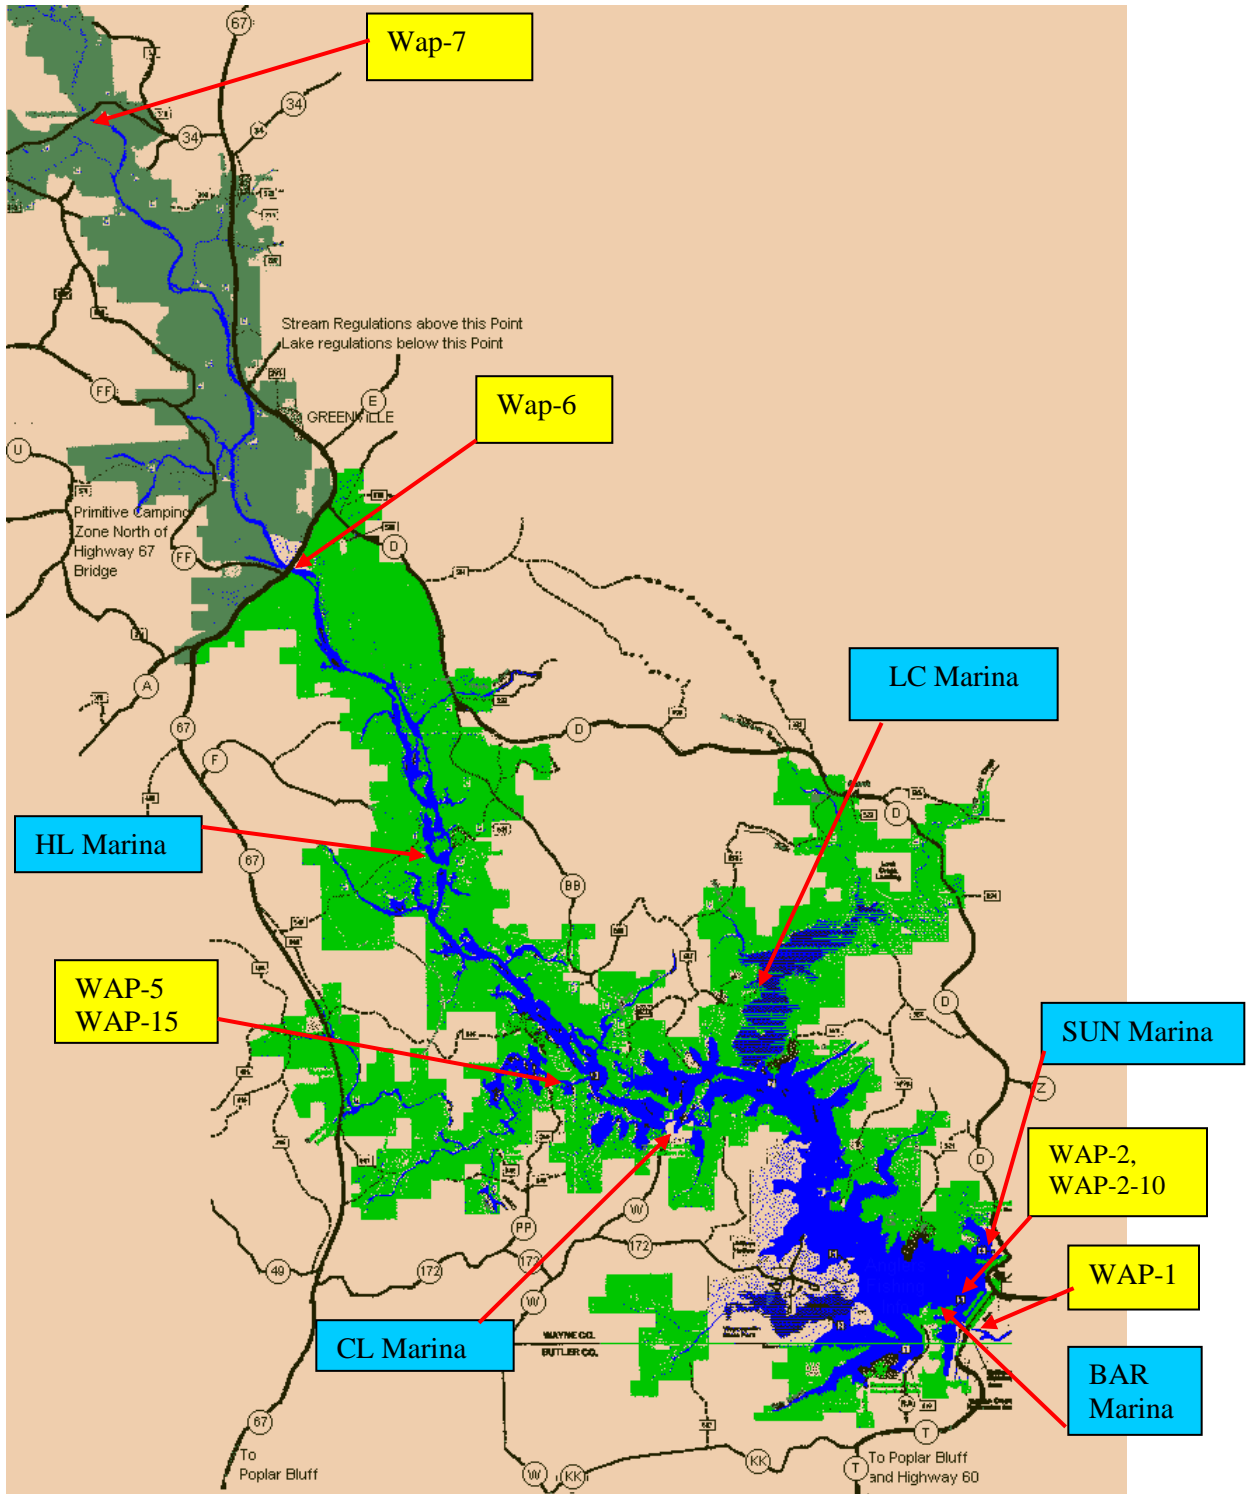


Figure 1
Location of sample sites

2.0 WATER QUALITY ASSESSMENT CRITERIA

2.1 Water Quality

The water quality assessment criteria were based upon the State of Missouri regulatory limits for certain contaminants, which has been generally accepted criteria for sustaining adequate aquatic plant and animal growth. The samplings and analysis which were conducted at the Wappapello Lake sites reflect the minimal set of parameters needed to analyze the current status of water quality for the Wappapello Lake system.

The following parameters were analyzed in the Fiscal Year 2012 samplings at Wappapello Lake: Total Organic Carbon (TOC), iron, manganese, ammonia-nitrogen, nitrate-nitrogen, orthophosphate, total phosphate, Total Suspended Solids (TSS), Total Volatile Suspended Solids (TVSS), fecal coliform, pH, temperature, dissolved oxygen, specific conductance, oxidation-reduction potential (ORP), chlorophyll, and pheophytin-a. In addition sediment samples were taken at the 3 lake sites and analyzed for metals, TKN, phosphates, nitrogen, solids, TOC, and pesticides.

The Missouri Department of Natural Resources, Code of State Regulations, Division 20, Chapter 7 classifies water quality criteria based on designated usage. These standards are used to determine the aquatic water quality of the lake. Table 2.1 provides a listing of the regulatory limits for the parameters analyzed where a limit has been established.

PARAMETER	LIMIT
Temperature	20.5°C - 33°C (68°F - 90°F)
Ammonia Nitrogen	15 mg/L
Nitrate Nitrogen	10 mg/L
Iron	1.0 mg/L (Aquatic Life)
Manganese	0.05 mg/L (Drinking Water & GW)
Phosphorous as Phosphate	0.05 mg/L
E. Coli	Missouri standard is 235 E. coli per 100ml for single sample or 126 for geometric mean
pH	Range: 6.5 to 9.0
DO	> 5.0 mg/L
Atrazine	0.003 mg/L ¹ ; 82ug/L ² ; 9ug/L ³
Alachlor	0.002 mg/L (Drinking Water Standard)
Conductivity	1,700 uS/cm≈TDS of 1,000 mg/L
Total Suspended Solids (TSS)	116mg/L(streams); ≥12mg/L Lakes
Cyanazine	370ug/L Acute; 30ug/L Chronic
Metolachlor	1.7mg/L Acute
Simazine	4.0ug/L ¹
Trifluralin	26ug/L Acute; 1.1ug/L Chronic

¹ Drinking Water Standard

² Acute

³ Chronic

Nitrogen is an essential component of proteins, genetic material, chlorophyll, and other key organic molecules. All organisms require nitrogen in order to survive. Nitrogen exists in several forms. These forms include gaseous nitrogen (N_2), nitrites (NO_2), nitrate (NO_3), ammonia nitrogen (NH_3-N), and ammonium (NH_4). Ammonia can be toxic to fish and other aquatic organisms at certain levels. Unlike ammonia, ammonium (NH_4) is not toxic to aquatic organisms and is readily available for uptake by plankton and macrophytes. Nitrogen levels have increased as human activities have accelerated the rate of fixed nitrogen being put into circulation. High nitrogen levels can cause eutrophication. Eutrophication increases biomass of phytoplankton, decrease water transparency, and causes oxygen depletion. Ammonia nitrogen is monitored so that the effects on fish spawning, hatching, growth rate and pathologic changes in gills, liver and kidney tissue can be related to the detected levels of ammonia nitrogen. Nitrate-nitrogen degrades to nitrite or produces ammonia which has a detrimental effect on aquatic life and, therefore, has been monitored to assure levels are below the regulatory "safe" limit.

Phosphate has been analyzed as phosphorus and has been monitored due to the potential for uptake by nuisance algae. Levels of phosphate can indicate the potential for rapid growth of algae (algae bloom) which can cause serious oxygen depletion during the algae decay process. Phosphorous is typically the limiting nutrient in a water body. Therefore, addition of phosphorous to the ecosystem stimulates the growth of plants and algae. Phosphorous is delivered to lakes and streams by way of storm water runoff from agricultural fields, residential property, and construction sites. Other sources of phosphorous are anaerobic decomposition of organic matter, leaking sewer systems, waterfowl, and point source pollution. The general standard for phosphorous in lake water is 0.05mg/L. Dissolved phosphorous also called ortho-phosphorous is generally found in much smaller concentrations than total phosphorous and is readily available for uptake. For this reason dissolved phosphorous concentrations are variable and difficult to use as an indicator of nutrient availability.

The metals manganese and iron are nutrients for both plants and animals. Living organisms require trace amounts of metals. However, excessive amounts can be harmful to the organism. Heavy metals exist in surface waters in three forms, colloidal, particulate, and dissolved. Water chemistry determines the rate of adsorption and desorption of metals to and from sediment. Metals are desorbed from the sediment if the water experiences increases in salinity, decreases in redox potential, or decreases in pH. Metals in surface waters can be from natural or human sources. Currently human sources contribute more metals than natural sources. Metals levels in surface water may pose a health risk to humans and the environment.

Photosynthetic activity can be hindered by the levels of total suspended solids. Total suspended solids concentrations, which cause the photosynthetic activity to be reduced by more than 10% from the seasonably established norm, can have a detrimental effect on aquatic life. Soil particles, organic material, and other debris comprise suspended solids in the water column. Secchi disk measurements are inverse to suspended solid measurements. As the total suspended solids (TSS) increase, the secchi disk depth or water transparency decreases. Total suspended

solids can be an important indicator of the type and degree of turbidity. TSS measurements represent a combination volatile suspended solids (VSS) which is comprised of organic material and nonvolatile suspended solids (NVSS) which is comprised of inorganic mineral particles in the water. In order to more accurately determine the types and amounts of suspended solids, volatile suspended solids (VSS) are analyzed. VSS concentration represents the organic portion of the total suspended solids. Organic material often includes plankton and additional plant and animal debris that is present in water. Total volatile solids indicate the presence of organics in suspension and, therefore, show additional demand levels of oxygen. Missouri does not currently have a standard for TSS or TVSS. However, literature suggests that NVSS above 15mg/L could highly impair recreational lake use and a NVSS of 3 to 7mg/L might cause slight impairment.

Chlorophyll and pheophytin-a are monitored to provide indicators of algae growth and, therefore, potential oxygen depletion activity. Chlorophyll is measured in lakes to estimate the type and amount of algal productivity in the water column. Chlorophyll a is present in green algae, blue-green algae, and in diatoms. Chlorophyll a is often used to indicate the degree of eutrophication. Chlorophyll b and c are used to estimate the extent of algal diversity and productivity. Chlorophyll b is common in green algae and is used as an auxiliary pigment for photosynthesis. Chlorophyll c is most common in diatom species and serves as an auxiliary pigment. Algal productivity and diversity can be determined by the concentrations of the individual pigments. For example high concentrations of chlorophyll a and b would indicate that green algae is abundant. High concentrations of chlorophyll a would indicate abundance of blue-green algae and concentrations of chlorophyll a and c would indicate diatoms are the dominant species. Chlorophyll production is currently being connected with hypoxia.

Fecal coliform bacteria is monitored for the protection of human health as it relates to full body contact of recreational waters. People can be exposed to disease-causing organisms, such as bacteria, viruses and protozoa in beach and recreational waters mainly through accidental ingestion of contaminated water or through skin contact. These organisms, called pathogens, usually come from the feces of humans and other warm-blooded animals. If taken into the body, pathogens can cause various illnesses and on rare occasions, even death. Waterborne illnesses include diseases resulting from bacteria infection such as cholera, salmonellosis, and gastroenteritis, viral infections such as hepatitis, gastroenteritis, and intestinal diseases, and protozoan infections such as ameobic dysentery and giardiasis. The most commonly monitored recreational water indicator organisms are fecal coliform, Escherichia coli, (E. coli) and enterococci. Fecal coliform are bacteria that live in the intestinal tracts of warm-blooded animals. The standard for fecal coliform is less than a geometric mean of 200 colonies per 100ml of sample water. Fecal coliform was originally recommended in 1968 by the Federal Water Pollution Control Administration (predecessor to EPA) as an effective water quality indicator organism for recreational waters. Recent studies indicate that fecal coliform show less correlation to illness than other indicator organisms such as E. coli and enterococci. The Environmental Protection Agency (EPA) currently recommends E. coli or enterococci as an indicator organism for fresh waters. Since 2009 the St. Louis District has been using E. coli as the standard indicator.

Atrazine and Alachlor herbicides are commonly used agricultural chemicals which can be

readily transported by rainfall runoff. Both compounds are suspected of causing cancer and, therefore, were monitored for the protection of human and aquatic health. Organic compounds include many pesticides. A pesticide can be any substance that is intended to prevent, destroy, repel, or mitigate any pest. This includes insecticides, herbicides, fungicides, fumigants, algaecides and other substances. Herbicides which are pesticides used to kill vegetation are the most widely used and sampled. Ten of the most frequently used herbicides and detected in water are Atrazine, Metolachlor, Alachlor, 2,4-D, Trifluralin, Glyphosate, Dicamba, Cyanazine, Simazine, and 2,4,5-T. Two of the most widely used pesticides are Atrazine and Alachlor. Atrazine is a preemergence or postemergence herbicide use to control broadleaf weeds and annual grasses. Atrazine is most commonly detected in ground and surface water due to its wide use, and its ability to persist in soil and move in water. Alachlor is a Restricted Use Pesticide (RUP) due to the potential to contaminate groundwater. The drinking water standard for Atrazine is 0.003mg/L and 0.002 mg/L for Alachlor.

Temperature, dissolved oxygen and pH are monitored for the protection of aquatic life. Temperature is important because it controls several aspects of water quality. Colder water hold more dissolved oxygen which is required by aquatic organisms. Plants grow more rapidly and use more oxygen in warmer water. Decomposition of organic matter which uses oxygen is accelerated in warmer water. Temperature can also determine the availability of toxic compounds such as ammonia. Since aquatic organisms are cold blooded, water temperature regulates their metabolism and ability to survive. The number and kinds of organisms that are found in streams or lakes is directly related to temperature. Certain organisms require a specific temperature range, such as trout, which require water temperatures below 20°C. Most aquatic organisms require a minimum concentration of dissolved oxygen to survive. In spring, surface waters of the lake mix with the water below through wind and thermal action. This mixing diminishes as the upper layer of water becomes warmer and less dense. Solar insolation during the summer months stratifies the lake into three zones. The upper warmer water zone is called the epilimnion and the lower cooler water zone is called the hypolimnion. The epilimnion and the hypolimnion zones are divided by a transition zone known as the metalimnion. The thermocline located within the metalimnion exhibits a rapid change in water temperature. During the summer months the hypolimnion may become anaerobic. In this anaerobic zone, chemical reduction of iron and manganese, or the production of methane and sulfides can occur. Iron rapidly oxidizes in aerobic environments, but manganese oxidizes slowly and can remain in the reduced state for long distances down stream even in aerobic environments. The degree of acidity of water is measured by a logarithmic scale ranging from 0 to 14 and is known as the pH scale. A reading of 7 indicates neutrality and readings below seven are acidic and above are alkaline. Most Missouri lakes range from 6 to 9 on the pH scale. The buffering capacity of water is the ability to neutralize acid better known as alkalinity. A high alkalinity concentration indicates an increased ability to neutralize pH and resist changes, whereas a low alkalinity concentration indicates that a water body is vulnerable to changes in pH.

Conductivity is a measure of a water's ability to conduct an electrical current. The ability to carry a current is often driven by the dissolved materials present in a water column. These materials can include dissolved ions and other materials in the water and thus are directly proportional to the concentration of total dissolved solids (TDS) present in the water column. Typically TDS concentrations represent 50-60% of the conductivity measurements.

Conductivity is also affected by water temperature. Conductivity is proportional to water temperature. Conductivity in streams and rivers is affected by the geology of the area. Streams running through granite areas tend to have lower conductivity due to granite being composed of inert material, materials that do not ionize or dissolve into ionic compounds in water. On the other hand streams that run through areas of limestone or clay soils tend to have higher conductivity readings because of the presence of materials that ionize. Conductivity is useful as a general measure of water quality. A stream tends to have a relatively constant range of conductivity that once established can be used as a baseline. Significant changes either high or low might indicate a source of pollution has been introduced into the water. The pollution source could be a treatment plant which raises the conductivity or an oil spill which would lower the conductivity.

Redox or Oxidation-Reduction Potential (ORP) is a measurement to oxidize materials. Oxidation involves an exchange of electrons between 2 atoms. The atom that loses an electron is oxidized and the one that gains an electron is reduced. ORP sensors measure the electrochemical potential between the solution and a reference electrode. Readings are expressed in millivolts with positive readings indicating increased oxidizing potential and negative readings being increased reduction. The ORP probe is essentially a millivolt meter, measuring the voltage across 2 electrodes with the water in between. ORP values are used much like pH values to determine water quality. While pH readings characterize the state of a system relative to the receiving or donating hydrogen ions (base or acid), ORP readings characterize the relative state of losing or gaining electrons. The conversion of ammonia (NH_3) requires an oxidizing environment to convert it into nitrites (NO_2) and nitrates (NO_3). Ammonia levels as low as 0.002mg/L can be harmful to fish. Generally ORP readings above 400mV are harmful to aquatic life. However, ORP is a non-specific measurement which is a reflection of a combination of effects of all the dissolved materials in the water. Therefore, the measurement of ORP in relatively clean water has only limited utility unless a predominant redox-active material is known to be present.

Water clarity is intuitively used by the public to judge water quality. Secchi depth has been used for many years as a limnological characterization tool for characterizing water clarity. Secchi depth is a measure of light penetration into a waterbody and is a function of the absorption and scattering of light in the water. There are three characteristics of water which affect the penetration of light. The three factors are the color of water, amount of phytoplankton in the water column, and amount of inorganic material in the water column. Secchi depth integrates the combined impacts of all the factors which influence water clarity. Water transparency was measured using a Secchi disk. Secchi disk readings were taken at all lake sites.

2.2 Sediment

In accordance with EM-1110-2-1201, sediment samples should be taken to monitor and assess potential impacts to aquatic and human health. To assess ecological risk, sample values were compared against toxicity information published in the National Oceanic Atmospheric Administrations (NOAA) Screening Quick Reference Tables (SQRT) or similar references for ecological receptors in freshwater sediment. Without standards or other widely applicable numerical tools, NOAA scientists found it difficult to estimate the possible toxicological significance of chemical concentrations in sediment. Therefore, numerical sediment quality

guidelines (SQG's) were developed as informal, interpretive tools. The SQGs were not promulgated as regulatory standards, but rather as informal, non-regulatory guidelines for interpreting chemical data from analyses of sediments. For potential ecological risk from inorganic contaminants, seven metals are typically of "most concern" with regards to fish and wildlife: Arsenic, Copper, Cadmium, Selenium, Mercury, Lead, and Zinc. Avian species are thought to be particularly sensitive to arsenic, but is also considered a carcinogenic, mutagenic, and teratogenic contaminant in a variety of species in elevated doses over time. Avian species are also known to be particularly sensitive to lead in the environment with effects ranging from mortality, reduced growth and reproductive output, behavior changes, blood chemistry alterations, and lesions of major organs. Finally, the embryo stages in fish and avian species are known to be the most sensitive life stage to selenium effecting reproductive success.

It is recommended that the next round of sediment samples focus on organochlorines in freshwater sediment to assess potential chronic aquatic impacts (e.g. aldrin, chlordane, endrin, endosulfan, DDT, methoxychlor).

3.0 SUMMARY OF MONITORING RESULTS

3.1 Water Quality Summary

The monitoring program for Wappapello Lake during Fiscal Year 2012 revealed good water quality when compared to limits established by the Missouri Department of Natural Resources for general use, secondary contact, and indigenous aquatic life. Nutrient runoffs were primary concerns for the lake's water quality. Better land management practices, erosion control and buffering zones are methods used to reduce such contaminants from entering the lake. The St. Louis District personnel are available to work with lake personnel, area communities and other agencies in the implementation of educational programs and implementation planning to bring about the use of better management techniques to improve the lake's water quality.

E. coli are sampled at the marinas to ensure that the marina areas are not being contaminated by boats with restroom facilities. Bacteria levels for all the marinas were well below the Missouri standard of 235. We currently do not take enough samples in a month to calculate a geometric mean, so we mainly look at a high mark of 235/100ml of sample to trigger additional investigations. *E. coli* beach sample results were received from the project office and incorporated into this report. The project office collects beach samples once a week during the recreation season. No samples were above the Missouri standards set for beaches.

Total iron and total manganese are sampled above the dam near the bottom of the river channel (WAP-2-10), and in the spillway area (WAP-1). As was previously stated living organisms require trace amounts of metals, however excessive amounts can be harmful to the organism. Iron cycling is a function of oxidation-reduction processes. This elevated level of iron near the bottom of the lake is not detrimental to the overall lake system at this time. Iron oxidizes relatively rapidly (minutes to hours); therefore any iron released through the spillway will normally be oxidized in a short period of time as can be seen from the significant reduction of iron in the spillway. Missouri's standard for manganese is for drinking water and

groundwater. Missouri does not have a manganese standard for aquatic life. According to MDNR elevated levels of manganese are common due to the geologic nature of the area.

Nitrogen and phosphates are sampled at all sites. All lake sites except site 6 exceeded the 0.05 mg/L standard. Because phosphorous in water is not considered directly toxic to humans and animals no drinking water standards have been established for phosphorous. However, phosphorous can cause health threats through the stimulation of toxic algal blooms and the resulting oxygen depletion. However, nitrates can pose a threat to human and animal health. Nitrate in water is toxic at high levels and has been linked to toxic effects of livestock and to blue baby disease (methemoglobinemia) in infants. The Maximum Contaminant Level (MCL) for nitrate-N in drinking water is 10mg/L to protect babies 3 to 6 months of age. The Missouri Water Quality Standard for ammonia nitrogen (NH₃-N) is 15mg/L. The increased levels of phosphate in combination with nitrogen and other lake conditions, such as temperature, pH and stagnant lake conditions, can lead to increased algae growth. Eutrophication is currently the most widespread water quality problem in the U.S. and many other countries. Restoration of eutrophic waters requires the reduction of nonpoint inputs of phosphorous and nitrogen. The resulting detrimental effects of algae toxins and oxygen depletion could result in health problems for fish and other aquatic species as well as land animals utilizing the water supply. There were no signs of any of these effects throughout 2012. The spike in ammonia in August at sites 1 and 2 may be a result of chemical processes occurring near the bottom of the lake. Normally Nitrate-Nitrogen, Ammonia-Nitrogen, and Phosphates decreased below the dam. The lake appears to capture and use up nitrogen which reduces nutrient levels released from the lake. This reduction of nutrient levels traveling down stream results in an improvement of water quality.

Chlorophyll *a* was sampled at 3 sites, WAP-2, WAP-5, WAP-6 and WAP15. WAP-15 is a duplicate sample of WAP-5. Chlorophyll *a* is a green pigment found in plants. Chlorophyll *a* concentrations are an indicator of phytoplankton abundance and biomass. They can be an effective measure of trophic status, and used as a measure of water quality. High levels often indicate poor water quality and low levels suggest good conditions. However, elevated levels are not necessarily bad. It is the long term persistence of elevated levels that is the problem. It is natural for chlorophyll *a* levels to fluctuate over time. Chlorophyll *a* tends to be higher after storm events and during the summer months when water temperatures and light levels are elevated. Chlorophyll can reduce the clarity of the water and the amount of oxygen available to other organisms. Chlorophyll is monitored to provide indicators of algae growth and therefore, potential oxygen depletion activity. Chlorophyll concentrations and cyanobacteria cell counts serve as proxies for the actual presence of algal toxins. Exposure to cyanobacteria or their toxins may produce allergic reactions such as skin rashes, eye irritations, respiratory symptoms, and in some cases more severe health effects. Microcystin is currently believed to be the most common cyanotoxin in lakes. While EPA does not currently have water quality criteria for algal toxins, the World Health Organization (WHO) has established recreational exposure guidelines for Chlorophyll-a, cyanobacterial cell counts, and microcystin. Wappapello lake was in the moderate risk of exposure category for chlorophyll. Missouri does not currently have a standard for chlorophyll. The data indicates a normal increase in chlorophyll levels during the warmer summer months, which is not a concern.

Due to the limited amount of agriculture in the Wappapello watershed and the

government chemical restrictions on the use of Atrazine and Alachlor on leased cropland, these chemicals were not sampled.

Total Suspended Solids (TSS) and Total Volatile Suspended Solids (TVSS) samples are collected at all sites. Solids can affect water quality by increasing temperature through the absorption of sunlight by the particles in the water, which also affects the clarity of the water. This can then affect the amount of oxygen in the water. Missouri does not currently have a standard for TSS or TVSS. However, literature suggests that Nonvolatile Suspended Solids (NVSS) which is a subdivision of TSS above 15mg/L could highly impair recreational lake use and a NVSS of 3 to 7mg/L might cause slight impairment. Suspended solids decreased below the dam. The lake allows the sediments to drop out of the water column before they are expelled down stream. This results in improved water quality.

Total Organic Carbon (TOC) is collected at all sites. TOC is an indicator of the organic character of water. The larger the carbon or organic content, the more oxygen is consumed. TOC tends to be higher in the summer months which may be a result of plant material, which had grown all summer and begins to decay. Missouri does not currently have a standard for TOC.

Temperature and dissolved oxygen levels were taken at all sites. Measurements were taken at 1 meter intervals at the lake sites. During the summer months the lake stratifies and a boundary is formed between the upper warmer water and the lower cooler water. This transition area is known as the thermocline, the area where the temperature drops significantly. Oxygen levels can also change drastically as a function of depth. This area where the oxygen level significantly drops is called the oxycline. The depth of the thermocline and oxycline can have an effect on the aquatic organisms. Occasionally the thermocline and oxycline are at or near the same depth.

PH is taken at all sites and at 1 meter intervals at lake sites. All sites were within the 6 to 9 pH range.

Conductivity and redox are taken at all sites and at 1 meter intervals at lake sites. Missouri recommends $1,700\mu\text{S}/\text{cm} \approx \text{TDS}$ of 1,000mg/L standard for conductivity. No site exceeded this recommendation. Missouri does not currently have a standard for redox.

Water coming into the lake is very clear, as can be seen from the secchi disk readings for site 6. Site 5 in Otter Creek had the lowest readings, which is most likely caused by the composition of the banks of the creek. The readings improved at the dam. This is most likely the result of sediments dropping out of the water column as the water moves down the lake toward the dam.

The monitoring program for Wappapello Lake during Fiscal Year 2012 revealed good water quality when compared to limits established by the Missouri Department of Natural Resources for general use, secondary contact, and indigenous aquatic life. Nutrient runoffs were primary concerns for the lake's water quality. Better land management practices, erosion control and buffering zones are methods used to reduce such contaminants from entering the lake. The

St. Louis District personnel are available to work with lake personnel, area communities and other agencies in the implementation of educational programs and implementation planning to bring about the use of better management techniques to improve the lake's water quality.

3.2 Sediment Summary

Sediment sampling was not conducted in 2012. Sediment sampling is normally conducted approximately every 5 years if funding is available. Sediment sampling was last conducted in 2007.

4.0 PLANNED 2013 STUDIES

The Wappapello Lake water quality monitoring program will continue in Fiscal Year 2013 on a limited basis. Because of budgetary constraints there will only be 3 sampling events in 2013. A restored number of sampling events would provide the ability to better evaluate water quality trends, to better defend project operations (lake levels, releases, maintenance projects, construction projects, etc.), to better confirm that we meet state water quality standards, and to better confirm that human health and safety are adequately protected. The sampling event is planned to be conducted between April and August in 2013. Wappapello Lake is a high usage recreational lake. The monitoring of water quality is imperative to assure the water quality is within acceptable limits for the designated usage.

The sampling sites include the following: WAP-1 Spillway, WAP-2 lake side of dam, WAP-5 Otter Creek, WAP-6 Greenville, WAP-7 Hwy 34 bridge and 4 marinas. This combination of sites effectively represents the incoming contaminants and their effects on the lake.

APPENDIX A

DATA

LAB DATA

Water Samples

Site	Method	Parameter	Flag	Result	MDL	PQL	Units
WAP-1	350.1	Ammonia Nitrogen		0.062	0.030	0.030	MG/L
WAP-1	350.1	Ammonia Nitrogen		0.10	0.030	0.030	MG/L
WAP-1	350.1	Ammonia Nitrogen		0.44	0.030	0.030	MG/L
WAP-15	350.1	Ammonia Nitrogen		0.039	0.030	0.030	MG/L
WAP-15	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-15	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-2	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-2	350.1	Ammonia Nitrogen		0.036	0.030	0.030	MG/L
WAP-2	350.1	Ammonia Nitrogen		0.069	0.030	0.030	MG/L
WAP-2-10	350.1	Ammonia Nitrogen		0.031	0.030	0.030	MG/L
WAP-2-10	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-2-10	350.1	Ammonia Nitrogen		0.14	0.030	0.030	MG/L
WAP-5	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-5	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-5	350.1	Ammonia Nitrogen		0.053	0.030	0.030	MG/L
WAP-6	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-6	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-6	350.1	Ammonia Nitrogen		0.030	0.030	0.030	MG/L
WAP-7	350.1	Ammonia Nitrogen		0.056	0.030	0.030	MG/L
WAP-7	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-7	350.1	Ammonia Nitrogen	<	0.030	0.030	0.030	MG/L
WAP-15	10200H	Chlorophyll a		6.2	2.0	2.0	MG/CU.M.
WAP-15	10200H	Chlorophyll a		31.2	2.0	2.0	MG/CU.M.
WAP-2	10200H	Chlorophyll a		18.4	2.0	2.0	MG/CU.M.
WAP-2	10200H	Chlorophyll a		48.1	2.0	2.0	MG/CU.M.
WAP-5	10200H	Chlorophyll a		13.6	2.0	2.0	MG/CU.M.
WAP-5	10200H	Chlorophyll a		27.3	2.0	2.0	MG/CU.M.
				LAB			
WAP-6	10200H	Chlorophyll a		ACCIDENT			
WAP-6	10200H	Chlorophyll a		3.5	2.0	2.0	MG/CU.M.
WAP-1	6010B	Iron		0.39	0.050	0.10	MG/L
WAP-1	6010B	Iron		0.33	0.050	0.10	MG/L

Site	Method	Parameter	Flag	Result	MDL	PQL	Units
WAP-1	6010B	Iron		0.21	0.050	0.10	MG/L
WAP-2-10	6010B	Iron		0.43	0.050	0.10	MG/L
WAP-2-10	6010B	Iron		0.14	0.050	0.10	MG/L
WAP-2-10	6010B	Iron		0.18	0.050	0.10	MG/L
WAP-1	6010B	Manganese		0.17	0.0050	0.010	MG/L
WAP-1	6010B	Manganese		0.89	0.0050	0.010	MG/L
WAP-1	6010B	Manganese		0.90	0.0050	0.010	MG/L
WAP-2-10	6010B	Manganese		0.15	0.0050	0.010	MG/L
WAP-2-10	6010B	Manganese		0.32	0.0050	0.010	MG/L
WAP-2-10	6010B	Manganese		0.31	0.0050	0.010	MG/L
WAP-1	GREEN	Nitrate as Nitrogen		0.057	0.020	0.020	MG/L
WAP-1	GREEN	Nitrate as Nitrogen		0.066	0.020	0.020	MG/L
WAP-1	GREEN	Nitrate as Nitrogen		0.11	0.020	0.020	MG/L
WAP-15	GREEN	Nitrate as Nitrogen		0.046	0.020	0.020	MG/L
WAP-15	GREEN	Nitrate as Nitrogen		0.041	0.020	0.020	MG/L
WAP-15	GREEN	Nitrate as Nitrogen	<	0.020	0.020	0.020	MG/L
WAP-2	GREEN	Nitrate as Nitrogen		0.035	0.020	0.020	MG/L
WAP-2	GREEN	Nitrate as Nitrogen		0.076	0.020	0.020	MG/L
WAP-2	GREEN	Nitrate as Nitrogen		0.084	0.020	0.020	MG/L
WAP-2-10	GREEN	Nitrate as Nitrogen		0.042	0.020	0.020	MG/L
WAP-2-10	GREEN	Nitrate as Nitrogen		0.044	0.020	0.020	MG/L
WAP-2-10	GREEN	Nitrate as Nitrogen	<	0.020	0.020	0.020	MG/L
WAP-5	GREEN	Nitrate as Nitrogen		0.032	0.020	0.020	MG/L
WAP-5	GREEN	Nitrate as Nitrogen		0.034	0.020	0.020	MG/L
WAP-5	GREEN	Nitrate as Nitrogen	<	0.020	0.020	0.020	MG/L
WAP-6	GREEN	Nitrate as Nitrogen		0.076	0.020	0.020	MG/L
WAP-6	GREEN	Nitrate as Nitrogen		0.039	0.020	0.020	MG/L
WAP-6	GREEN	Nitrate as Nitrogen	<	0.020	0.020	0.020	MG/L
WAP-7	GREEN	Nitrate as Nitrogen		0.10	0.020	0.020	MG/L
WAP-7	GREEN	Nitrate as Nitrogen		0.14	0.020	0.020	MG/L
WAP-7	GREEN	Nitrate as Nitrogen		0.039	0.020	0.020	MG/L
WAP-15	10200H	Pheophytin a		2.5	2.0	2.0	MG/CU.M.
WAP-15	10200H	Pheophytin a		5.9	2.0	2.0	MG/CU.M.
WAP-2	10200H	Pheophytin a		4.6	2.0	2.0	MG/CU.M.
WAP-2	10200H	Pheophytin a	<	2.0	2.0	2.0	MG/CU.M.
WAP-5	10200H	Pheophytin a		2.6	2.0	2.0	MG/CU.M.
WAP-5	10200H	Pheophytin a		5.0	2.0	2.0	MG/CU.M.
WAP-6	10200H	Pheophytin a		LAB			

Site	Method	Parameter	Flag	ACCIDENT			Units
				Result	MDL	PQL	
WAP-6	10200H	Pheophytin a	<	2.0	2.0	2.0	MG/CU.M.
WAP-1	365.2	Phosphorus		0.071	0.010	0.010	MG/L
WAP-1	365.2	Phosphorus		0.091	0.010	0.010	MG/L
WAP-1	365.2	Phosphorus		0.12	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus		0.063	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus		0.12	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus		0.14	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus		0.054	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus		0.074	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus		0.10	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus		0.071	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus		0.095	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus		0.10	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus		0.076	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus		0.13	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus		0.16	0.010	0.010	MG/L
WAP-6	365.2	Phosphorus		0.028	0.010	0.010	MG/L
WAP-6	365.2	Phosphorus		0.044	0.010	0.010	MG/L
WAP-6	365.2	Phosphorus		0.033	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus		0.033	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus		0.040	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus		0.028	0.010	0.010	MG/L
WAP-1	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-1	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-1	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-15	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-2-10	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-5	365.2	Phosphorus, -ortho		0.012	0.010	0.010	MG/L

Site	Method	Parameter	Flag	Result	MDL	PQL	Units
WAP-6	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-6	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-6	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-7	365.2	Phosphorus, -ortho	<	0.010	0.010	0.010	MG/L
WAP-1	160.2	Solids, Total Suspended		11.6	2.0	2.0	MG/L
WAP-1	160.2	Solids, Total Suspended		12.0	2.2	2.2	MG/L
WAP-1	160.2	Solids, Total Suspended		13.7	2.9	2.9	MG/L
WAP-15	160.2	Solids, Total Suspended		11.5	1.3	1.3	MG/L
WAP-15	160.2	Solids, Total Suspended		17.1	2.2	2.2	MG/L
WAP-15	160.2	Solids, Total Suspended		24.0	2.9	2.9	MG/L
WAP-2	160.2	Solids, Total Suspended		8.3	1.4	1.4	MG/L
WAP-2	160.2	Solids, Total Suspended		10.0	2.2	2.2	MG/L
WAP-2	160.2	Solids, Total Suspended		12.3	2.9	2.9	MG/L
WAP-2-10	160.2	Solids, Total Suspended		16.6	2.0	2.0	MG/L
WAP-2-10	160.2	Solids, Total Suspended		14.2	2.5	2.5	MG/L
WAP-2-10	160.2	Solids, Total Suspended		13.1	2.9	2.9	MG/L
WAP-5	160.2	Solids, Total Suspended		11.8	2.0	2.0	MG/L
WAP-5	160.2	Solids, Total Suspended		17.3	2.2	2.2	MG/L
WAP-5	160.2	Solids, Total Suspended		23.0	3.3	3.3	MG/L
WAP-6	160.2	Solids, Total Suspended		4.3	1.0	1.0	MG/L
WAP-6	160.2	Solids, Total Suspended		5.2	1.1	1.1	MG/L
WAP-6	160.2	Solids, Total Suspended		2.9	1.1	1.1	MG/L
WAP-7	160.2	Solids, Total Suspended		10.0	1.3	1.3	MG/L
WAP-7	160.2	Solids, Total Suspended		3.9	1.0	1.0	MG/L
WAP-7	160.2	Solids, Total Suspended		5.9	1.3	1.3	MG/L
WAP-1	160.4	Solids, Volatile Suspended		2.6	2.0	2.0	MG/L
WAP-1	160.4	Solids, Volatile Suspended		3.8	2.2	2.2	MG/L
WAP-1	160.4	Solids, Volatile Suspended		7.7	2.9	2.9	MG/L
WAP-15	160.4	Solids, Volatile Suspended		2.4	1.3	1.3	MG/L
WAP-15	160.4	Solids, Volatile Suspended		3.6	2.2	2.2	MG/L
WAP-15	160.4	Solids, Volatile Suspended		9.7	2.9	2.9	MG/L
WAP-2	160.4	Solids, Volatile Suspended		2.6	1.4	1.4	MG/L
WAP-2	160.4	Solids, Volatile Suspended		4.0	2.2	2.2	MG/L
WAP-2	160.4	Solids, Volatile Suspended		8.0	2.9	2.9	MG/L
WAP-2-10	160.4	Solids, Volatile Suspended		3.2	2.0	2.0	MG/L
WAP-2-10	160.4	Solids, Volatile Suspended		4.8	2.5	2.5	MG/L

Site	Method	Parameter	Flag	Result	MDL	PQL	Units
WAP-2-10	160.4	Solids, Volatile Suspended		7.7	2.9	2.9	MG/L
WAP-5	160.4	Solids, Volatile Suspended		2.0	2.0	2.0	MG/L
WAP-5	160.4	Solids, Volatile Suspended		4.2	2.2	2.2	MG/L
WAP-5	160.4	Solids, Volatile Suspended		9.3	3.3	3.3	MG/L
WAP-6	160.4	Solids, Volatile Suspended		1.1	1.0	1.0	MG/L
WAP-6	160.4	Solids, Volatile Suspended	<	1.1	1.1	1.1	MG/L
WAP-6	160.4	Solids, Volatile Suspended	<	1.1	1.1	1.1	MG/L
WAP-7	160.4	Solids, Volatile Suspended	<	1.3	1.3	1.3	MG/L
WAP-7	160.4	Solids, Volatile Suspended	<	1.0	1.0	1.0	MG/L
WAP-7	160.4	Solids, Volatile Suspended	<	1.3	1.3	1.3	MG/L
WAP-1	9060	Total Organic Carbon		2.4	1.0	1.0	MG/L
WAP-1	9060	Total Organic Carbon		2.6	1.0	1.0	MG/L
WAP-1	415.1	Total Organic Carbon		7.3	1.0	1.0	MG/L
WAP-15	9060	Total Organic Carbon		2.1	1.0	1.0	MG/L
WAP-15	9060	Total Organic Carbon		2.6	1.0	1.0	MG/L
WAP-15	415.1	Total Organic Carbon		7.9	1.0	1.0	MG/L
WAP-2	9060	Total Organic Carbon		2.4	1.0	1.0	MG/L
WAP-2	9060	Total Organic Carbon		2.7	1.0	1.0	MG/L
WAP-2	415.1	Total Organic Carbon		6.7	1.0	1.0	MG/L
WAP-2-10	9060	Total Organic Carbon		2.3	1.0	1.0	MG/L
WAP-2-10	9060	Total Organic Carbon		2.6	1.0	1.0	MG/L
WAP-2-10	415.1	Total Organic Carbon		5.3	1.0	1.0	MG/L
WAP-5	9060	Total Organic Carbon		2.0	1.0	1.0	MG/L
WAP-5	9060	Total Organic Carbon		2.7	1.0	1.0	MG/L
WAP-5	415.1	Total Organic Carbon		6.5	1.0	1.0	MG/L
WAP-6	9060	Total Organic Carbon		1.3	1.0	1.0	MG/L
WAP-6	9060	Total Organic Carbon		1.2	1.0	1.0	MG/L
WAP-6	415.1	Total Organic Carbon		1.6	1.0	1.0	MG/L
WAP-7	9060	Total Organic Carbon		1.3	1.0	1.0	MG/L
WAP-7	9060	Total Organic Carbon		1.2	1.0	1.0	MG/L
WAP-7	415.1	Total Organic Carbon		1.8	1.0	1.0	MG/L

J indicates an estimated value between Method Detection Limit (MDL) and the Practical Quantitation Limit (PQL)

U Indicates non detect (ND)

Marina E. coli

Site	Date Collected	Result	Qualifier	Unit
WAP CL MARINA	5/15/12	10.0		COL/100 ML
WAP LC MARINA	5/15/12	4.0		COL/100 ML
WAP SUN MARINA	5/15/12	2.0	<	COL/100 ML
WAP BAR MARINA	6/12/12	3		COL/100 ML
WAP CL MARINA	6/12/12	NEGATIVE		
WAP LC MARINA	6/12/12	10		COL/100 ML
WAP SUN MARINA	6/12/12	NEGATIVE		
WAP-BAR MARINA	8/13/12	25.0	<	COL/100 ML
WAP-CL MARINA	8/13/12	25.0	<	COL/100 ML
WAP-LC MARINA	8/13/12	25.0	<	COL/100 ML
WAP-SUN MARINA	8/13/12	25.0	<	COL/100 ML
WAP BAR MARINA	5/15/12	2.0		COL/100 ML


FIELD DATA

Site	Date	Depth	Water Temp (oC)	Redox (mv)	Cond (uS)	DO %	DO mg/l	pH	Time	Seechi (in)	Air Temp (oF)
WAP-1	5/15/2012	0.3	24.19	418	199	96.7	8.03	8.3			
WAP-1	6/12/2012	0.9	25.15	283	143.2	96.1	7.86	8.1	1019		
WAP-1	8/13/2012	0.4	27.23	316	237	90.1	7.05	8.3	1053		
WAP-2	5/15/2012	0.4	25.5	380	202	112.6	9.1	8.57	1340	28	
WAP-2	5/15/2012	1	25.4	383	202	112.1	9.09	8.57			
WAP-2	5/15/2012	2	24.2	386	198	110.4	9.11	8.53			
WAP-2	5/15/2012	3	23.9	392	198	105.7	8.68	8.39			
WAP-2	5/15/2012	4	23.8	395	199	101.1	8.41	8.3			
WAP-2	5/15/2012	5	23.8	398	198	98.4	8.2	8.24			
WAP-2	5/15/2012	6	26.6	401	200	94.9	7.92	8.16			
WAP-2	5/15/2012	7	23.3	405	200	79.6	6.72	7.94			
WAP-2	5/15/2012	8	22.7	414	201	56.2	4.7	7.67			
WAP-2	5/15/2012	9	20.4	418	223	7.6	0.63	7.4			
WAP-2	6/12/2012	0.3	25.25	270	147.8	91	7.42	8.38	1058	24	
WAP-2	6/12/2012	1	25.29	271	141.9	92.4	7.54	8.37	1059		
WAP-2	6/12/2012	2	25.21	274	142.1	89.4	7.25	8.3	1100		
WAP-2	6/12/2012	3	25.06	278	141.9	83	6.74	8.17	1100		
WAP-2	6/12/2012	4	24.99	281	142.4	78	6.39	8.1	1101		
WAP-2	6/12/2012	5	24.95	282	142	76.9	6.31	8.09	1102		
WAP-2	6/12/2012	6	24.95	284	142.3	75.5	6.17	8.05	1103		
WAP-2	6/12/2012	7	24.92	286	142.6	73.5	6.09	8.01	1103		
WAP-2	6/12/2012	8	24.9	288	142.7	71.1	5.85	7.96	1104		
WAP-2	6/12/2012	9	24.5	302	152.8	17.5	1.45	7.63	1105		
WAP-2	6/12/2012	9.4	24.09	-22	176.8	8	0.64	7.38	1106		
WAP-2	8/13/2012	0.3	28.22	333	223	84.9	6.53	8.74	1137	13	
WAP-2	8/13/2012	1	27.49	339	224	70.2	5.4	8.62	1138		
WAP-2	8/13/2012	2	27.22	344	225	55.3	4.22	8.41	1139		
WAP-2	8/13/2012	3	27.16	347	225	49.5	3.87	8.3	1140		
WAP-2	8/13/2012	4	27.14	349	225	47.6	3.7	8.25	1141		
WAP-2	8/13/2012	5	27.11	351	227	43.1	3.38	8.19	1141		
WAP-2	8/13/2012	6	26.5	150	286	4.5	0.35	7.57	1142		
WAP-2	8/13/2012	7	25.75	111	325	2.7	0.22	7.31	1143		


Site	Date	Depth	Water Temp (oC)	Redox (mv)	Cond (uS)	DO %	DO mg/l	pH	Time	Secchi (in)	Air Temp (oF)
WAP-2	8/13/2012	8	25.5	101	330	2.4	0.18	7.24	1143		
WAP-2	8/13/2012	9	25.34	96	344	2	0.16	7.14	1144		
WAP-2	8/13/2012	10	24.94	53	498	2	0.16	6.77	1144		
WAP-5	5/15/2012	0.4	24.98	417	246	112.6	9.2	8.56		16	
WAP-5	5/15/2012	1	23.6	423	242	97.2	7.8	8.38			
WAP-5	5/15/2012	2	22.9	426	239	90.6	7.67	8.29			
WAP-5	5/15/2012	3	22.58	435	243	58.8	4.77	7.92			
WAP-5	6/12/2012	0.3	26.77	248	171.3	95.4	7.58	8.39	1156	16	
WAP-5	6/12/2012	1	25.41	259	172.4	72.3	5.92	8.17	1157		
WAP-5	6/12/2012	2	25.02	264	170.5	64	5.25	7.99	1157		
WAP-5	6/12/2012	3	24.83	257	170	56.5	4.66	7.91	1158		
WAP-5	8/13/2012	0.3	28.26	283	249	111.6	8.57	8.85	1240	10	
WAP-5	8/13/2012	1	26.61	299	253	61.2	4.68	8.26	1241		
WAP-5	8/13/2012	2	26.26	301	249	67.9	5.43	8.33	1242		
WAP-5	8/13/2012	3	25.95	306	248	67.8	5.41	8.25	1242		
WAP-5	8/13/2012	3.4	25.98	53	376	66.6	5.26	7.13	1243		
WAP-6	5/15/2012	0.4	22.54	450	259	105.2	9	8.39	1015	48	
WAP-6	5/15/2012	1	22.43	450	258	105.9	9.11	8.17			
WAP-6	5/15/2012	2	19.5	457	260	94.1	8.41	7.95			
WAP-6	5/15/2012	3	16.59	463	255	79.2	7.4	7.72			
WAP-6	5/15/2012	4	16.37	468	257	60.2	5.7	7.53			
WAP-6	6/12/2012	0.5	24.31	308	180.3	91.6	7.61	8.02	932	36	
WAP-6	6/12/2012	1	23.96	310	180.5	86.5	7.23	7.94	933		
WAP-6	6/12/2012	2	19.51	322	180.4	64	5.58	7.66	934		
WAP-6	6/12/2012	3	17.14	320	179.8	41.2	3.92	7.5	935		
WAP-6	8/13/2012	0.5	25.26	362	295	95.6	7.74	8.31	1000	48	
WAP-6	8/13/2012	1	25.02	363	295	93.4	7.55	8.21	1001		
WAP-6	8/13/2012	2	21.46	371	298	81.8	7.09	7.81	1002		
WAP-6	8/13/2012	3	17.75	376	297	72	6.68	7.63	1003		
WAP-6	8/13/2012	4	17.5	378	297	75.2	7.08	7.55	1004		
WAP-6	8/13/2012	4.6	17.49	378	297	73	6.88	7.57	1004		
WAP-7	5/15/2012	0.2	22.73	440	248	102.5	8.74	8.24	944		55-84
WAP-7	6/12/2012	1.1	22.97	286	120.4	80.1	6.8	8.13	903		64-88
WAP-7	8/13/2012	1.3	24.74	362	273	85.9	6.98	8.2	923		76

APPENDIX B


LAB GRAPHS

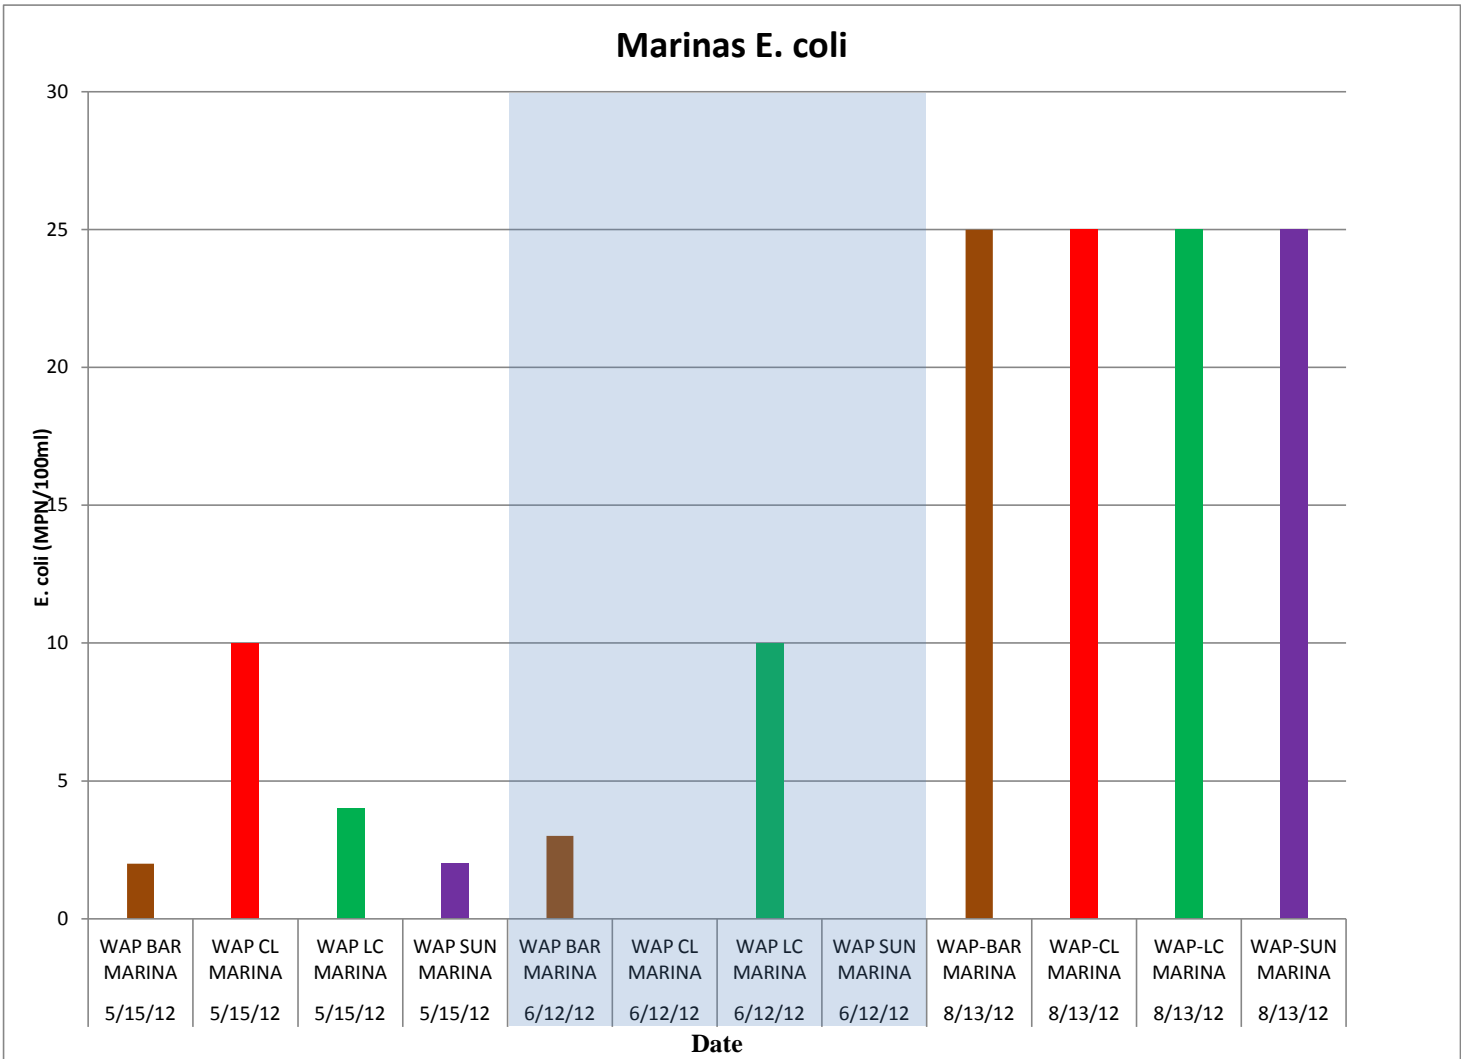


Wappapello Iron & Manganese

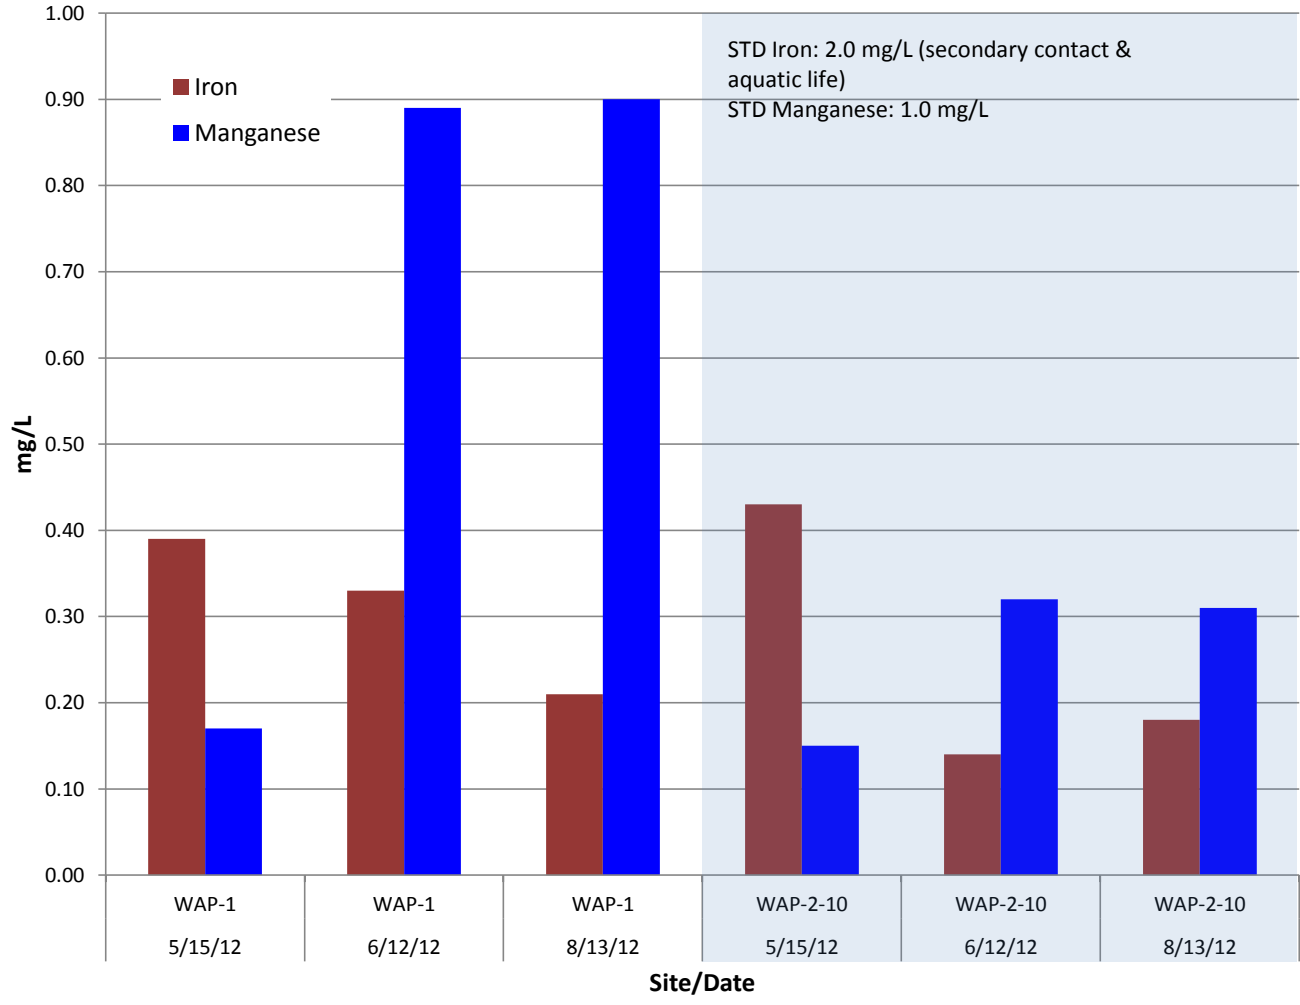


Wappapello Tributary Ammonia Nitrogen & Nitrate Nitrogen

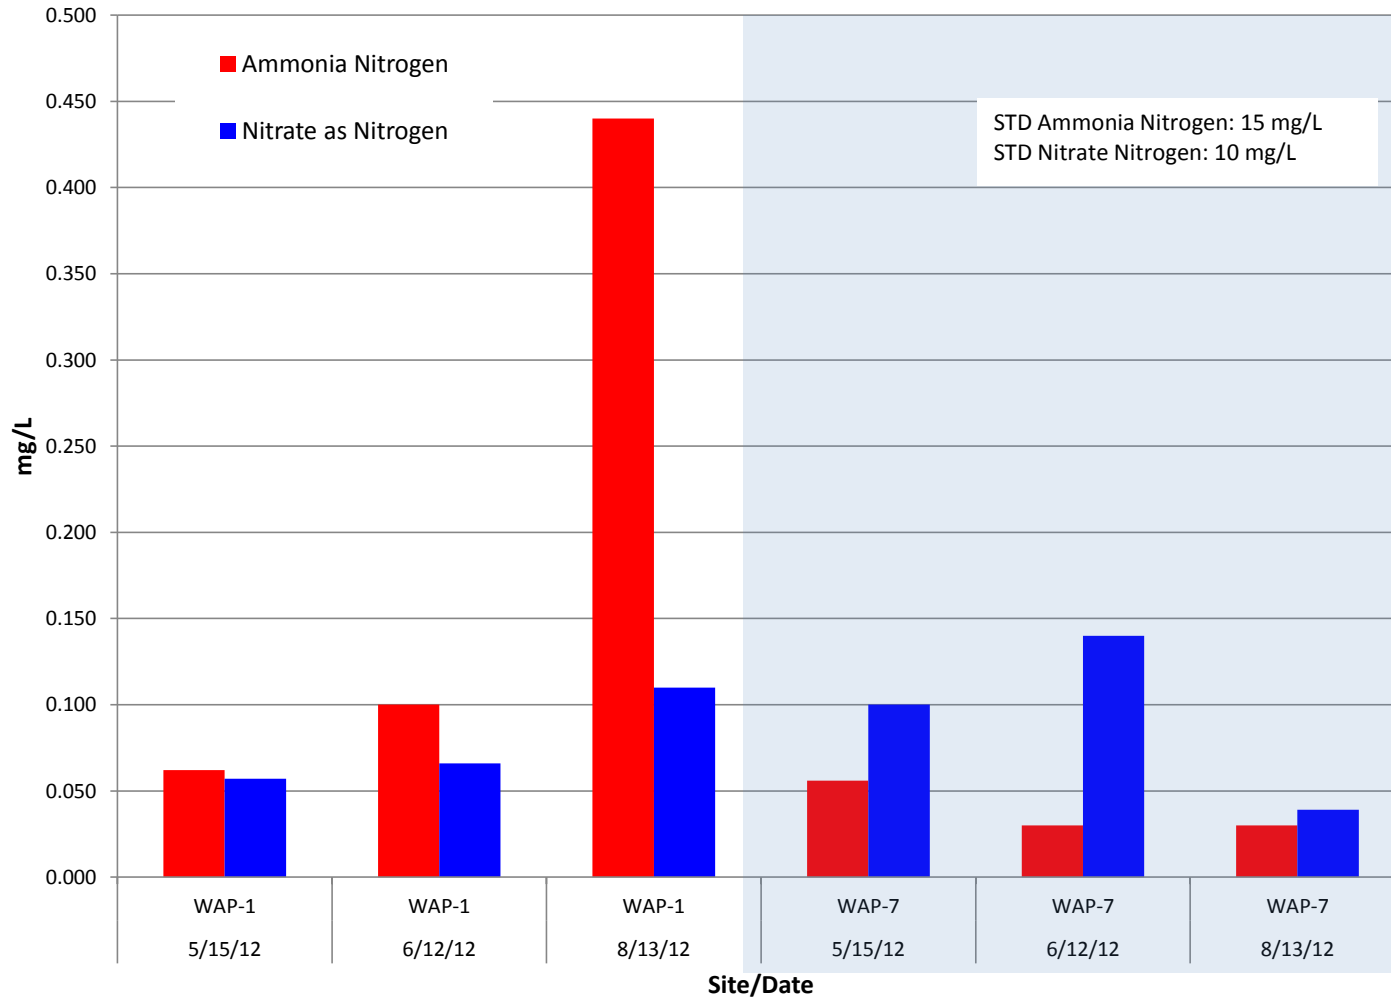


Wappapello Lake Ammonia Nitrogen & Nitrate Nitrogen

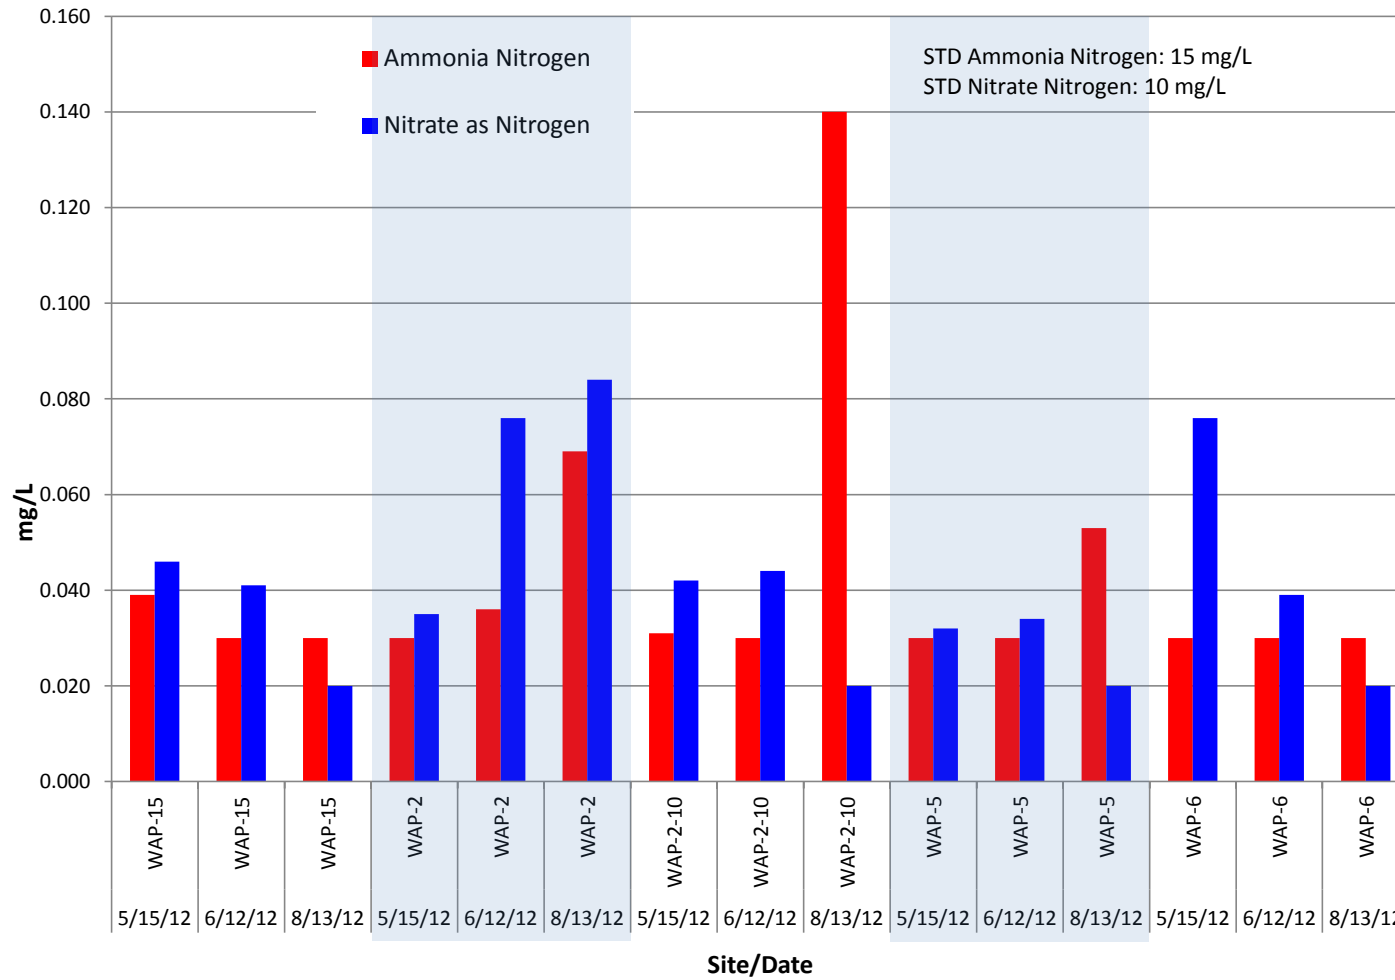


Wappapello Tributary Phosphorous

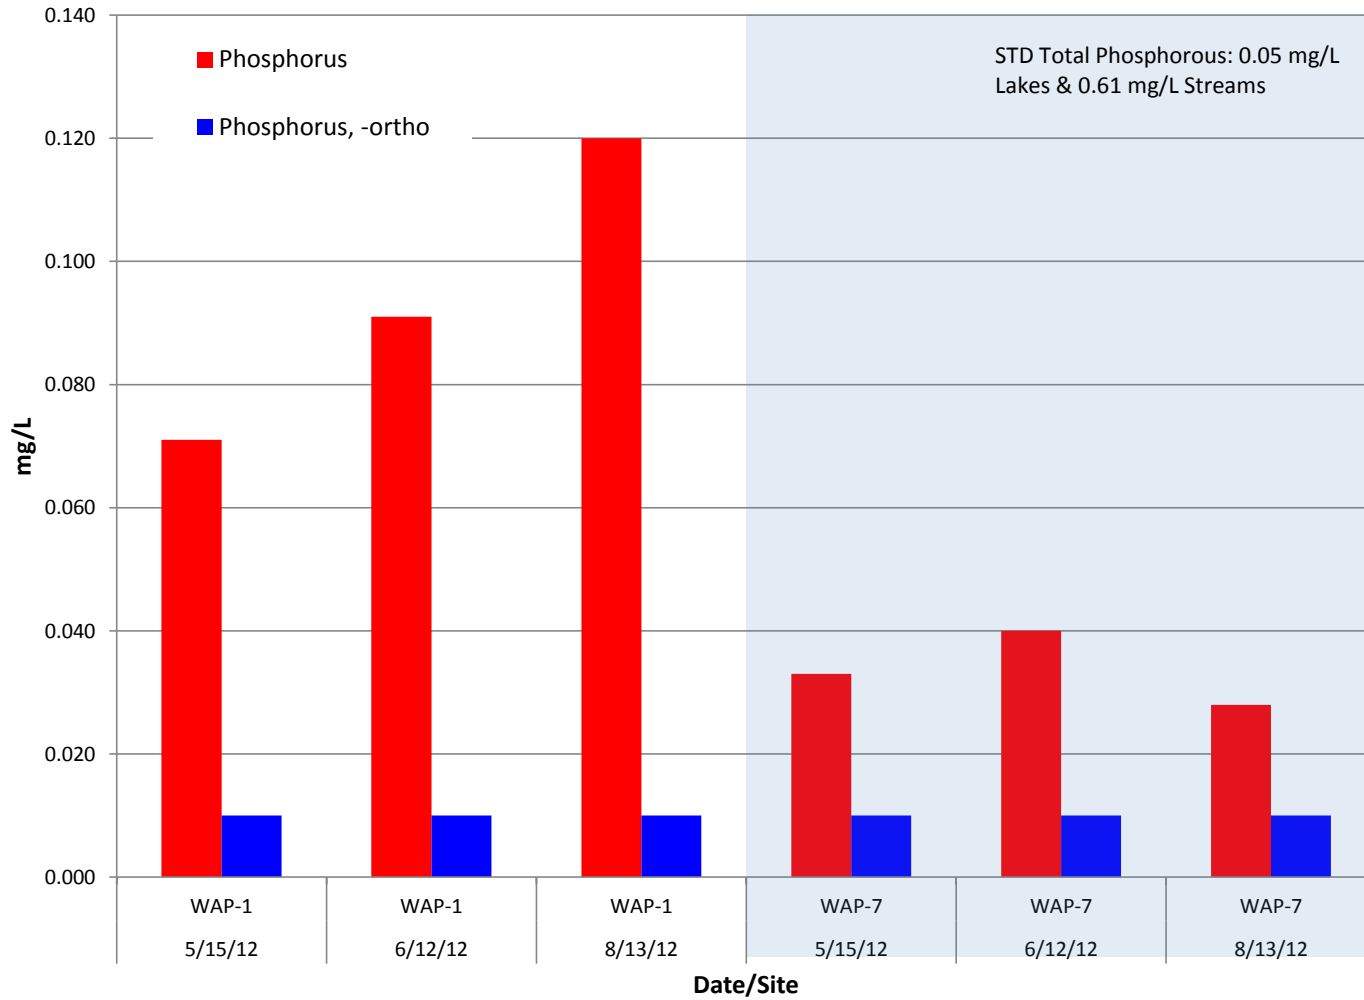


Wappapello Lake Phosphorous

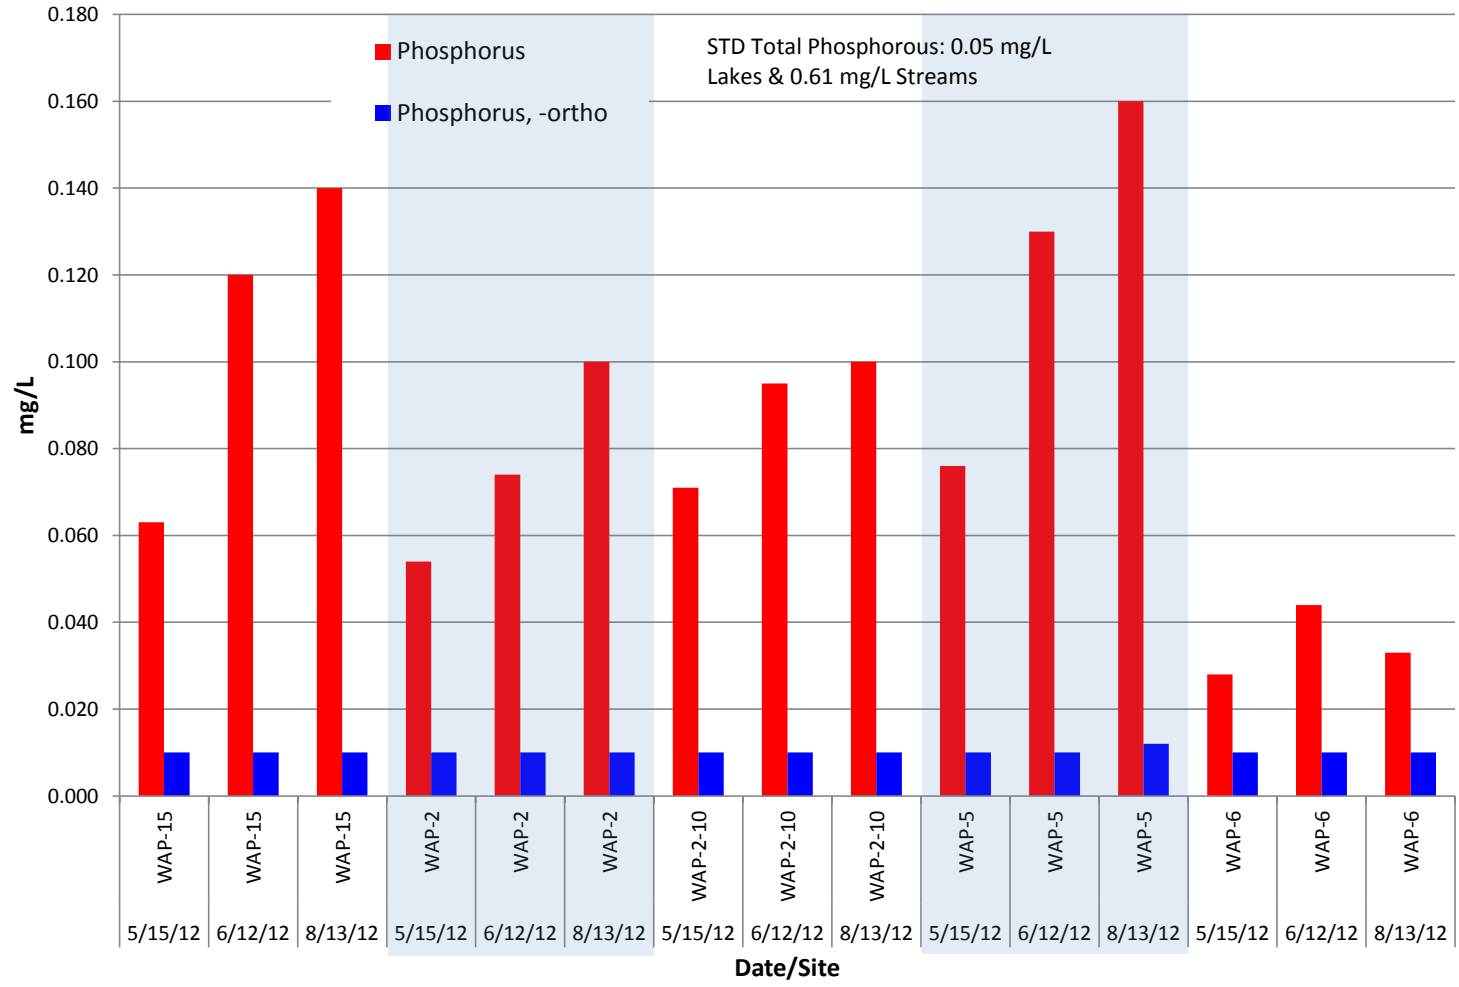


Wappapello Chlorophyll & Pheophytin

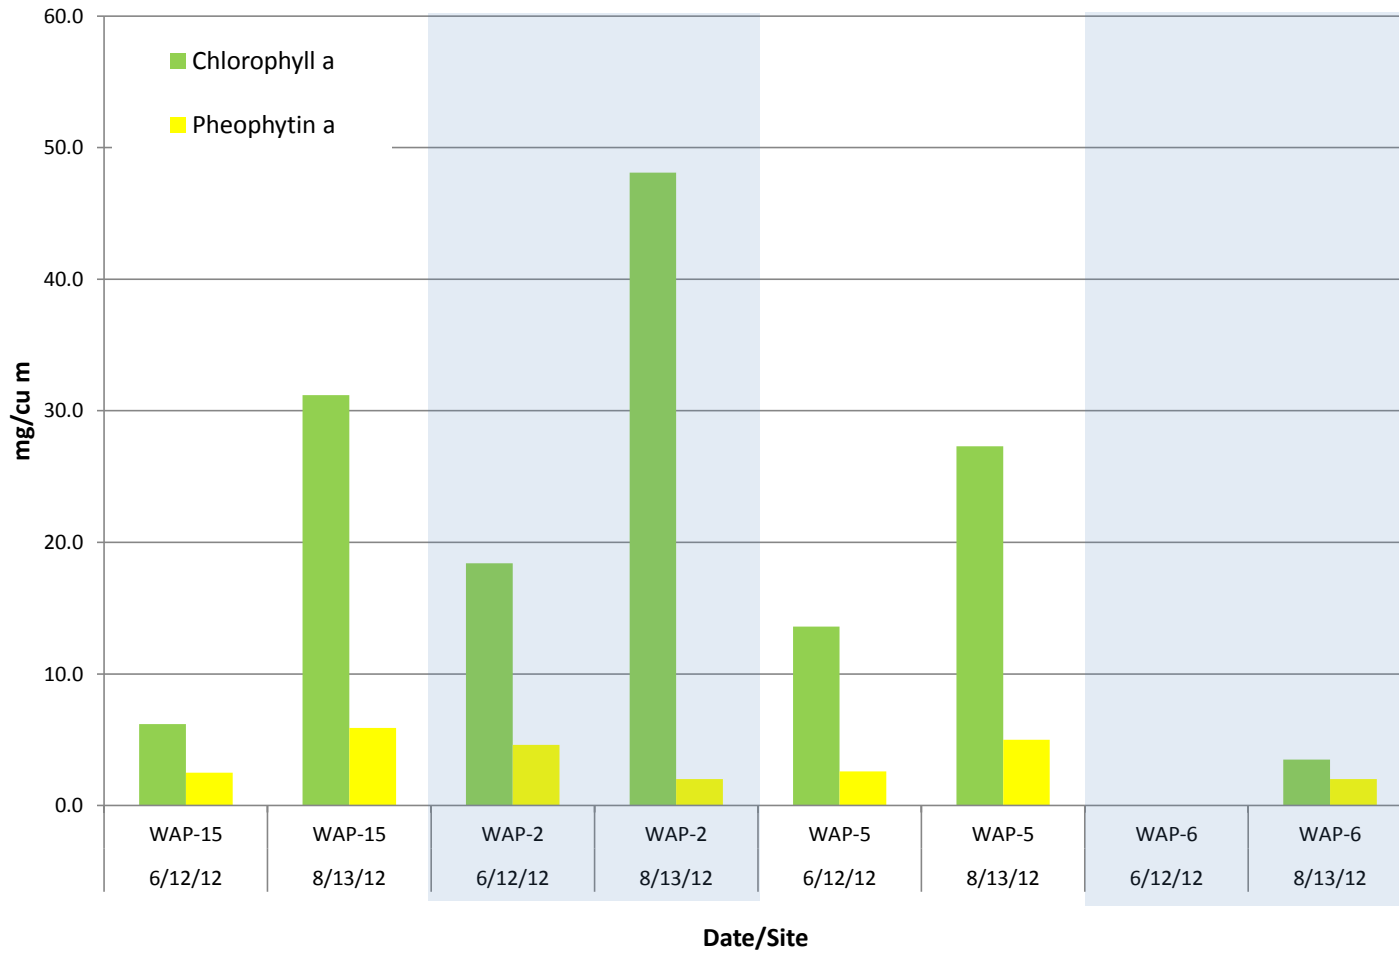


Wappapello Tributary Solids

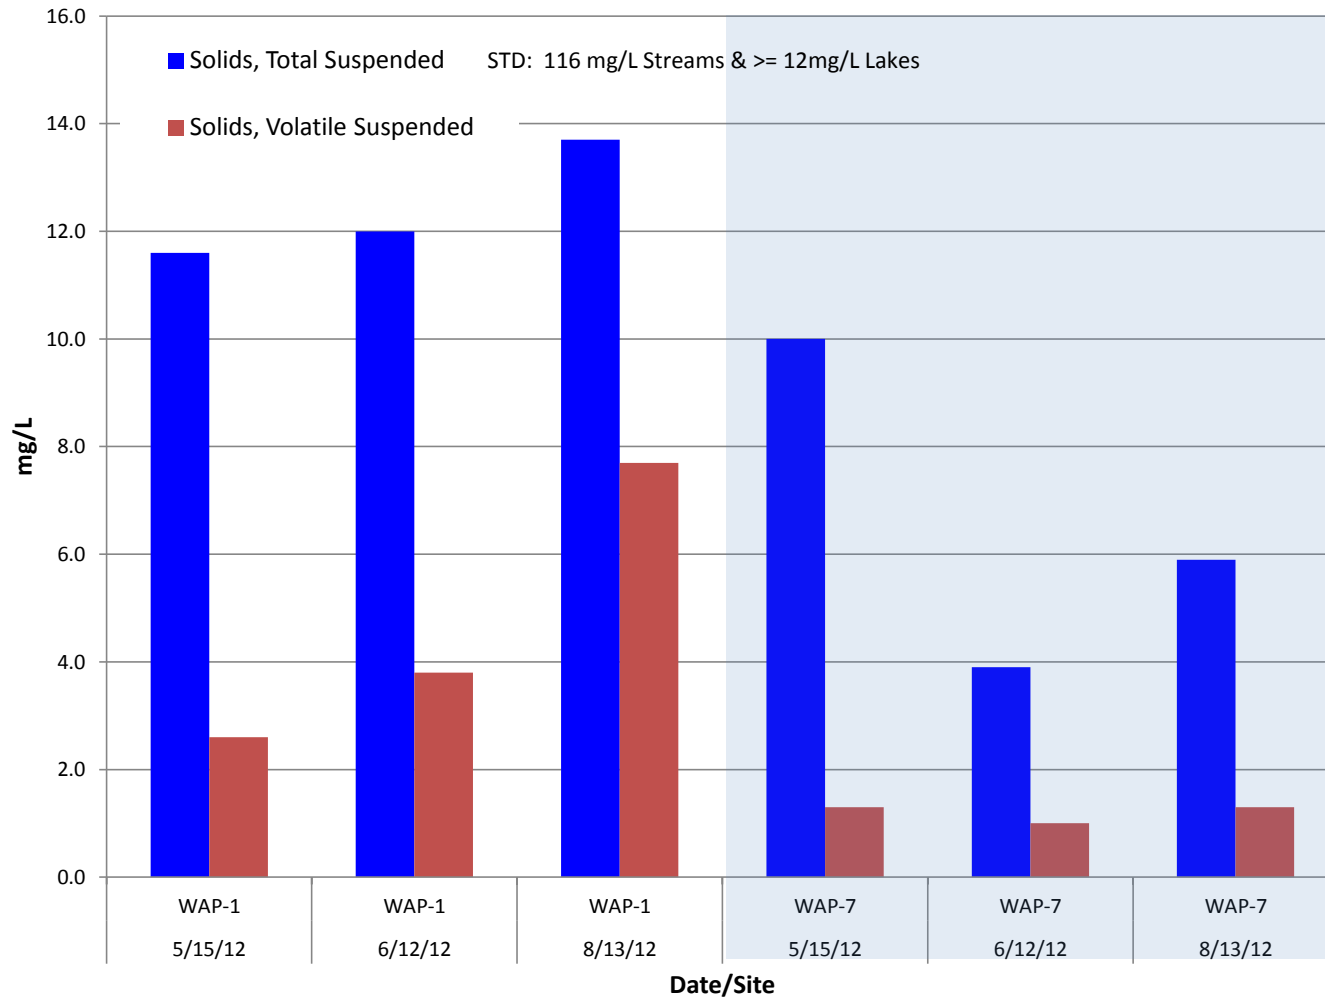


Wappapello Lake Solids

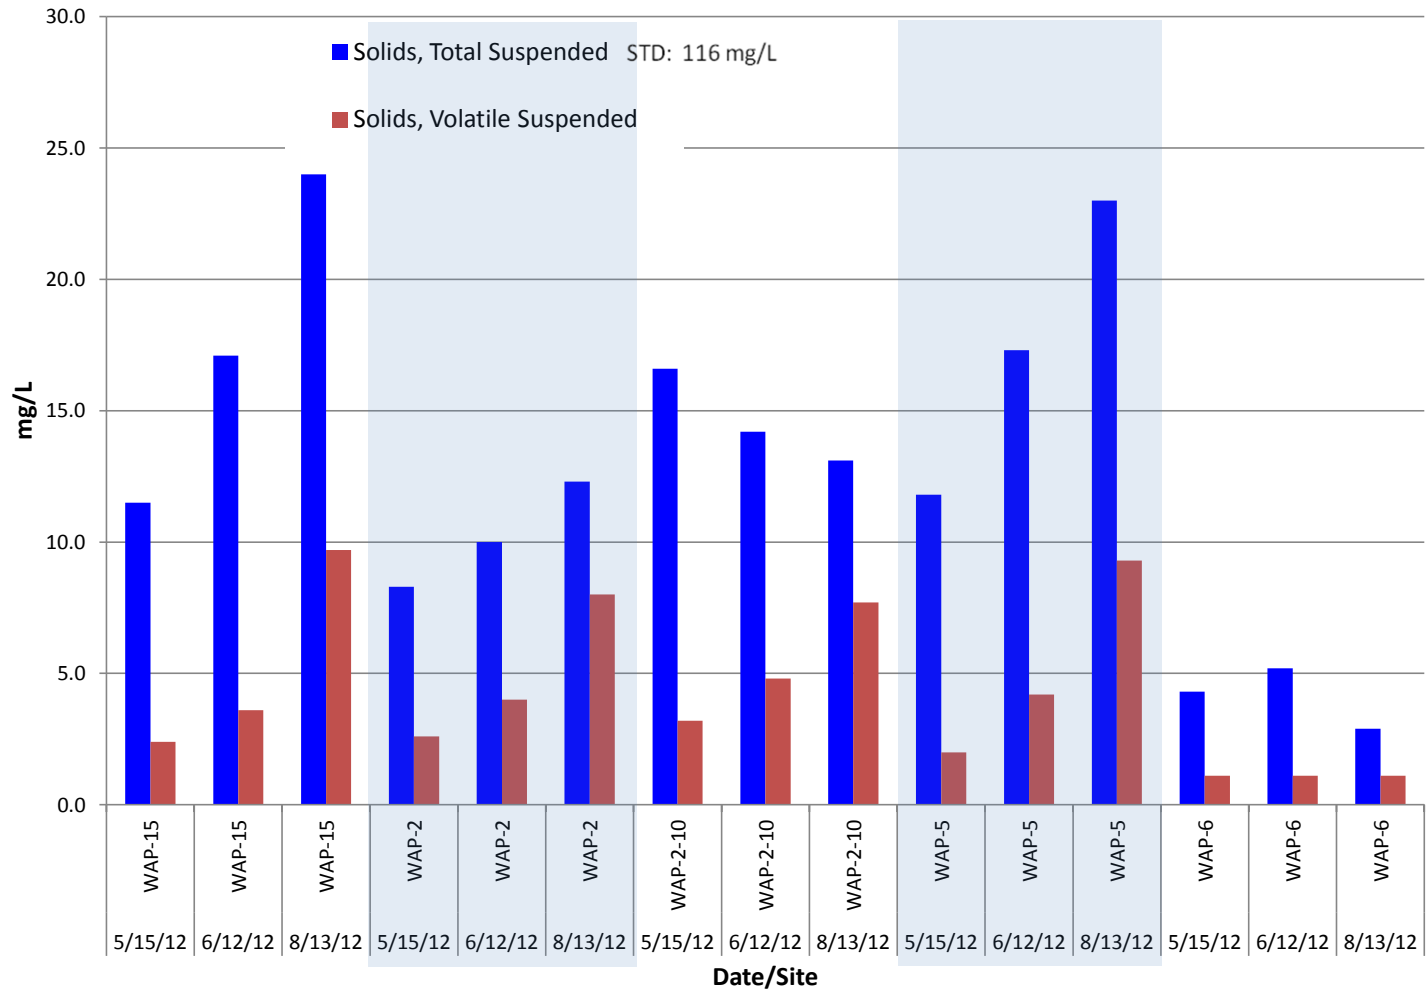

Wappapello Tributary Total Organic Carbon

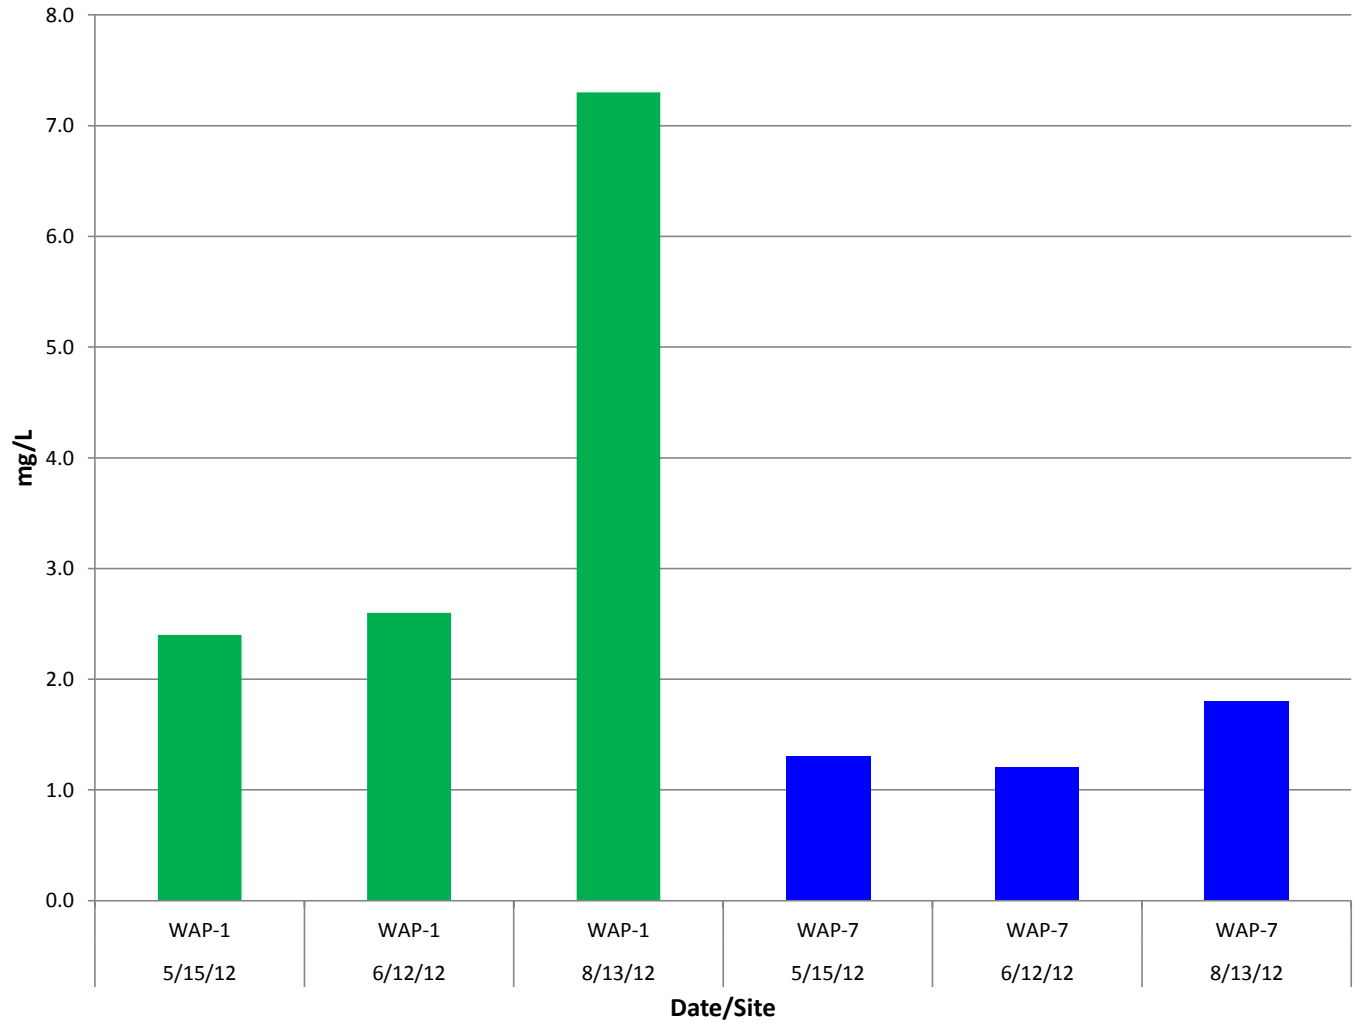


Wappapello Lake Total Organic Carbon

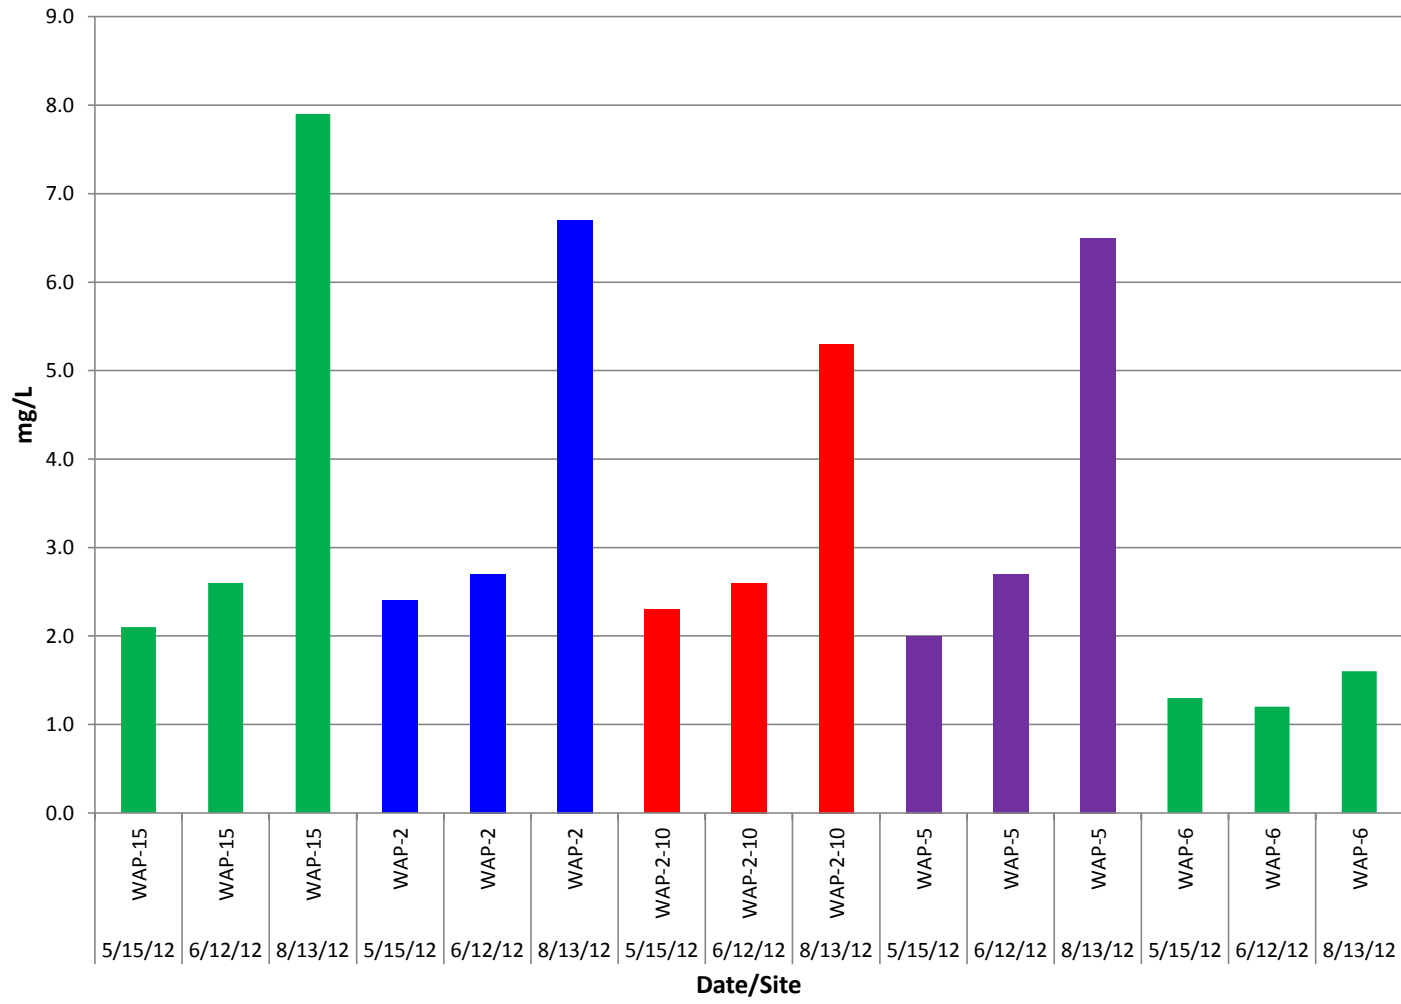



APPENDIX C


FIELD GRAPHS

Wap-1 Temp & DO

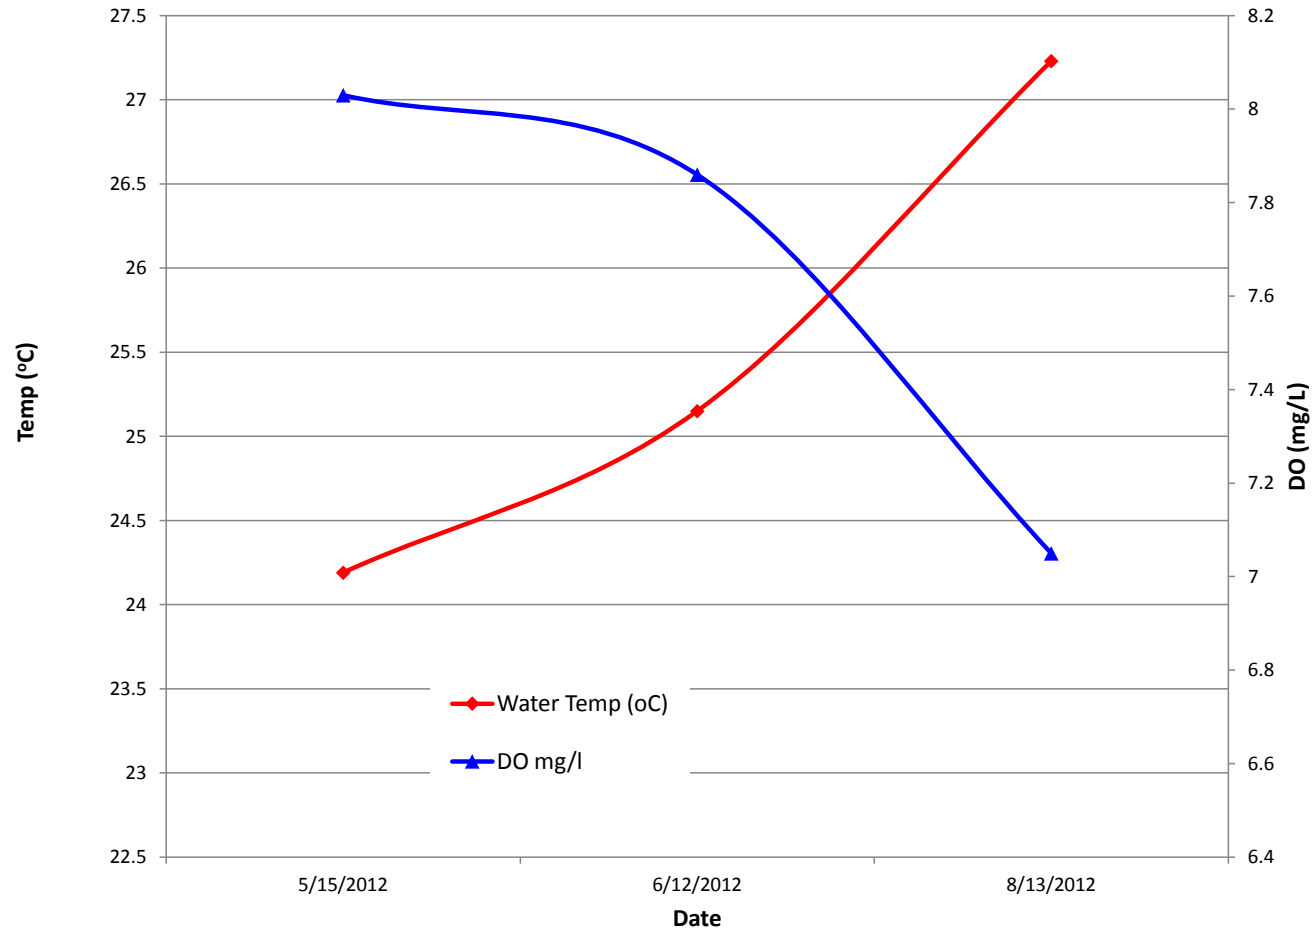


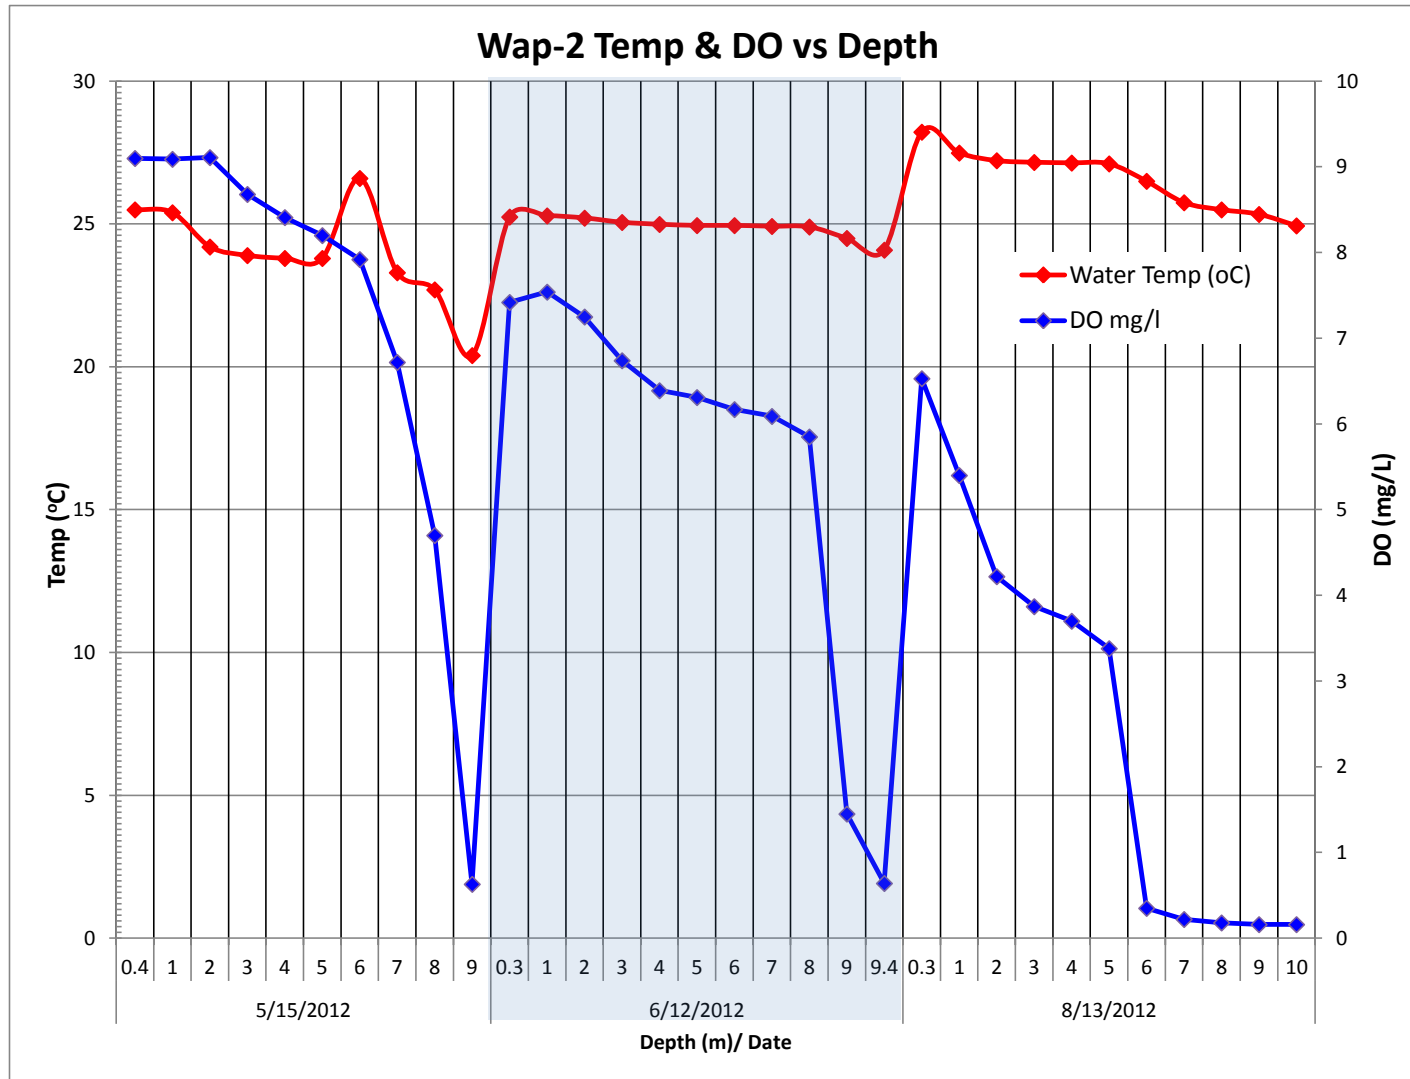

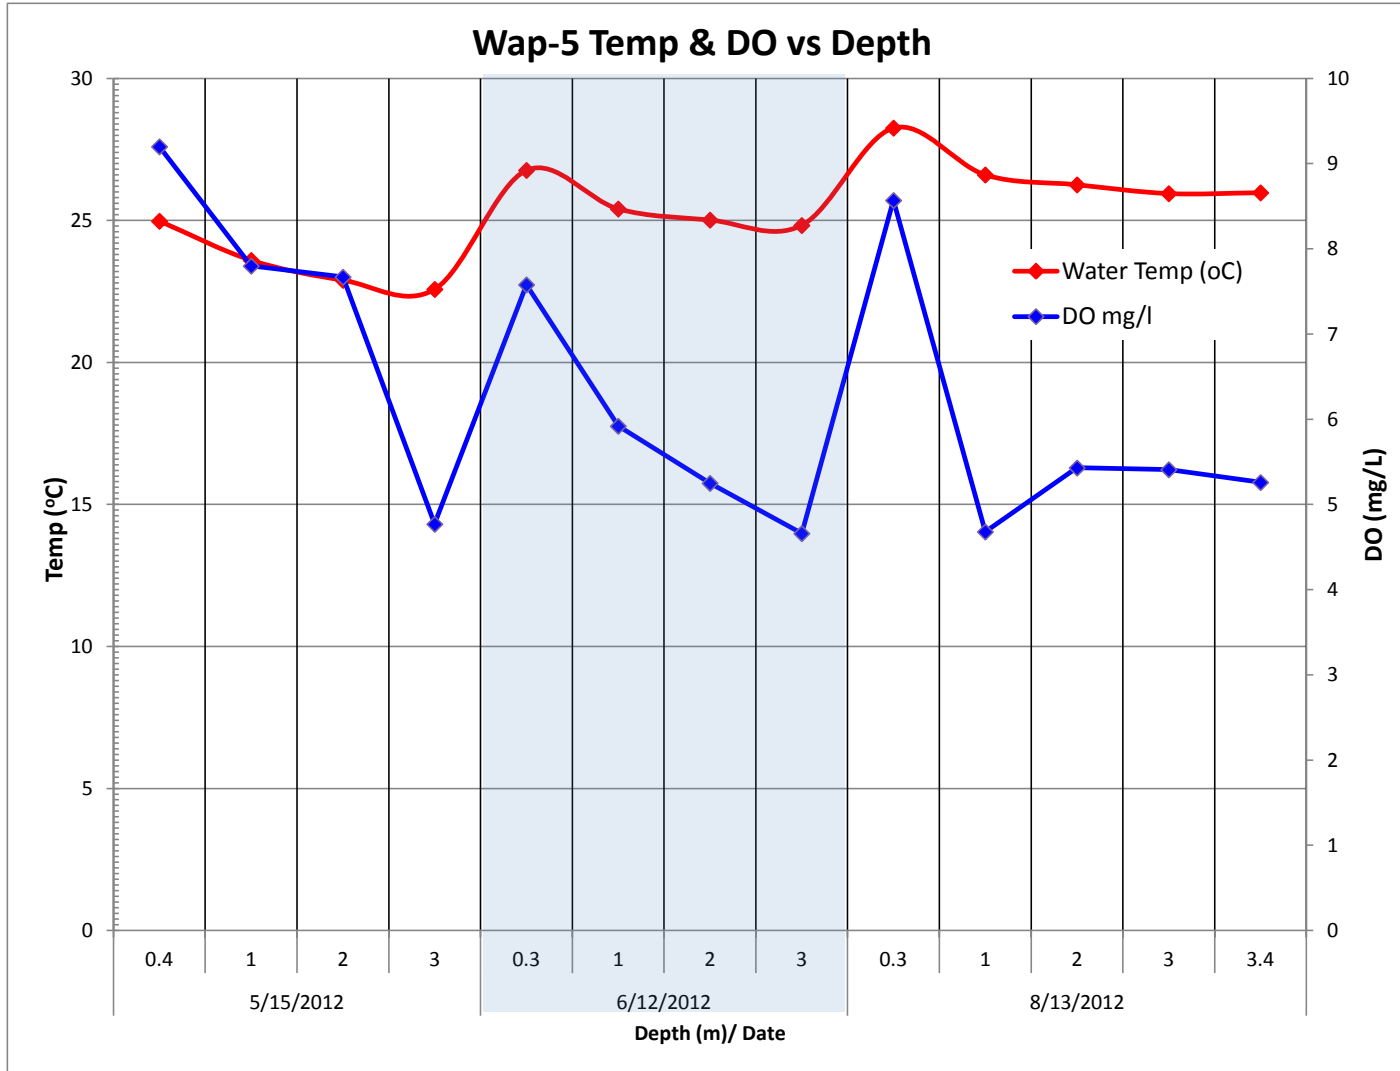


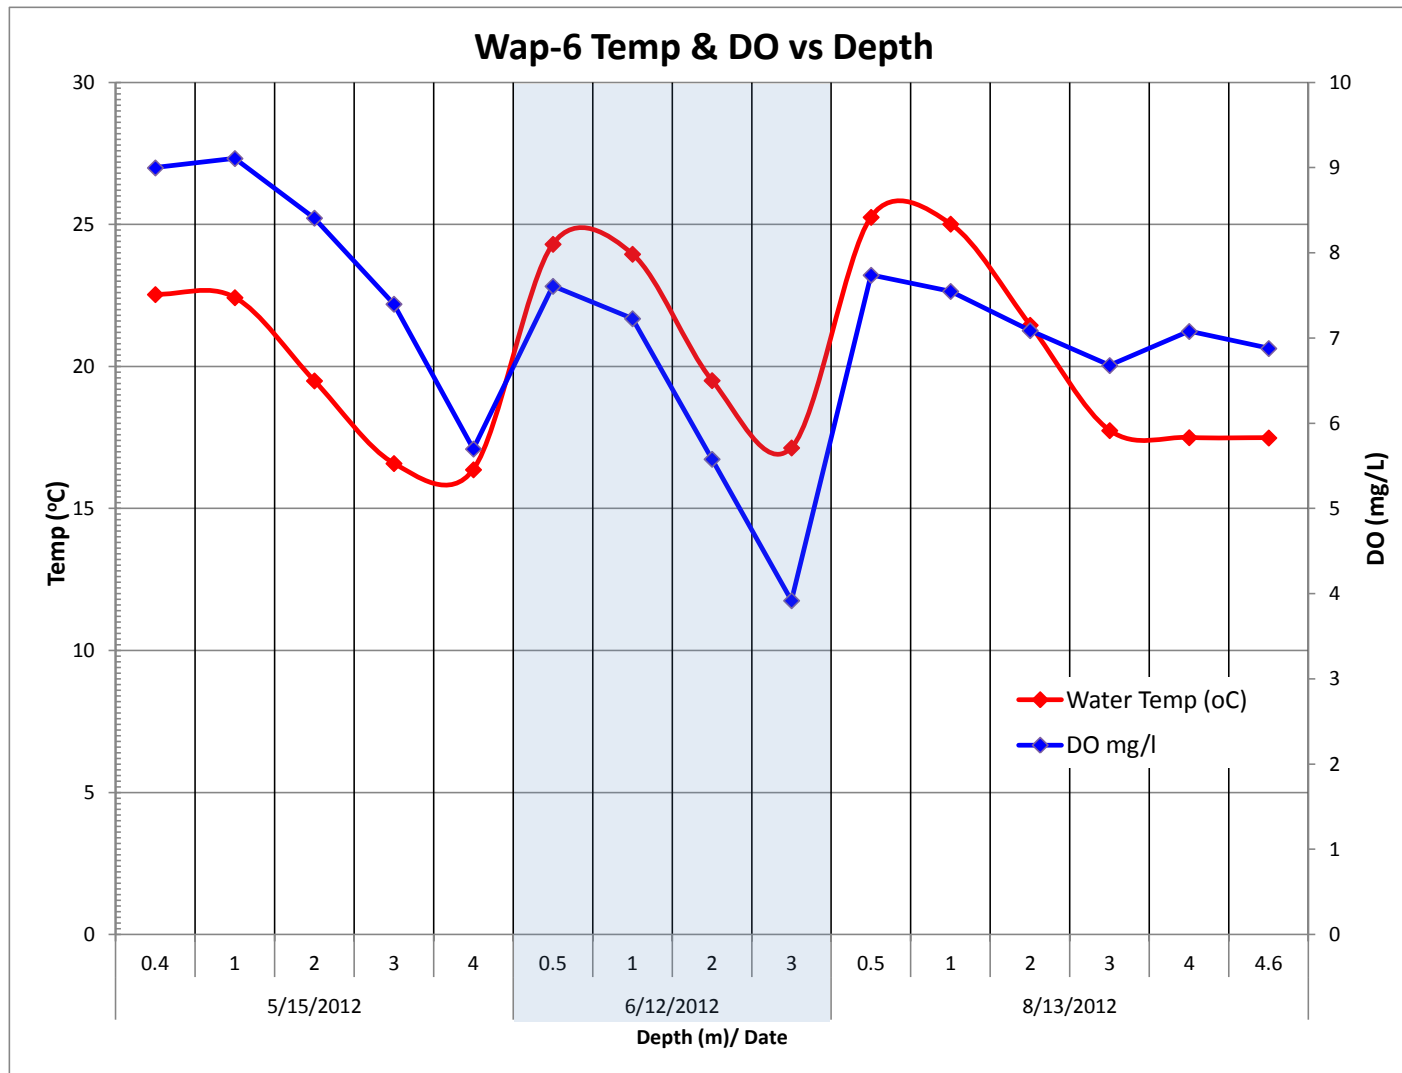


Wap-7 Temp & DO

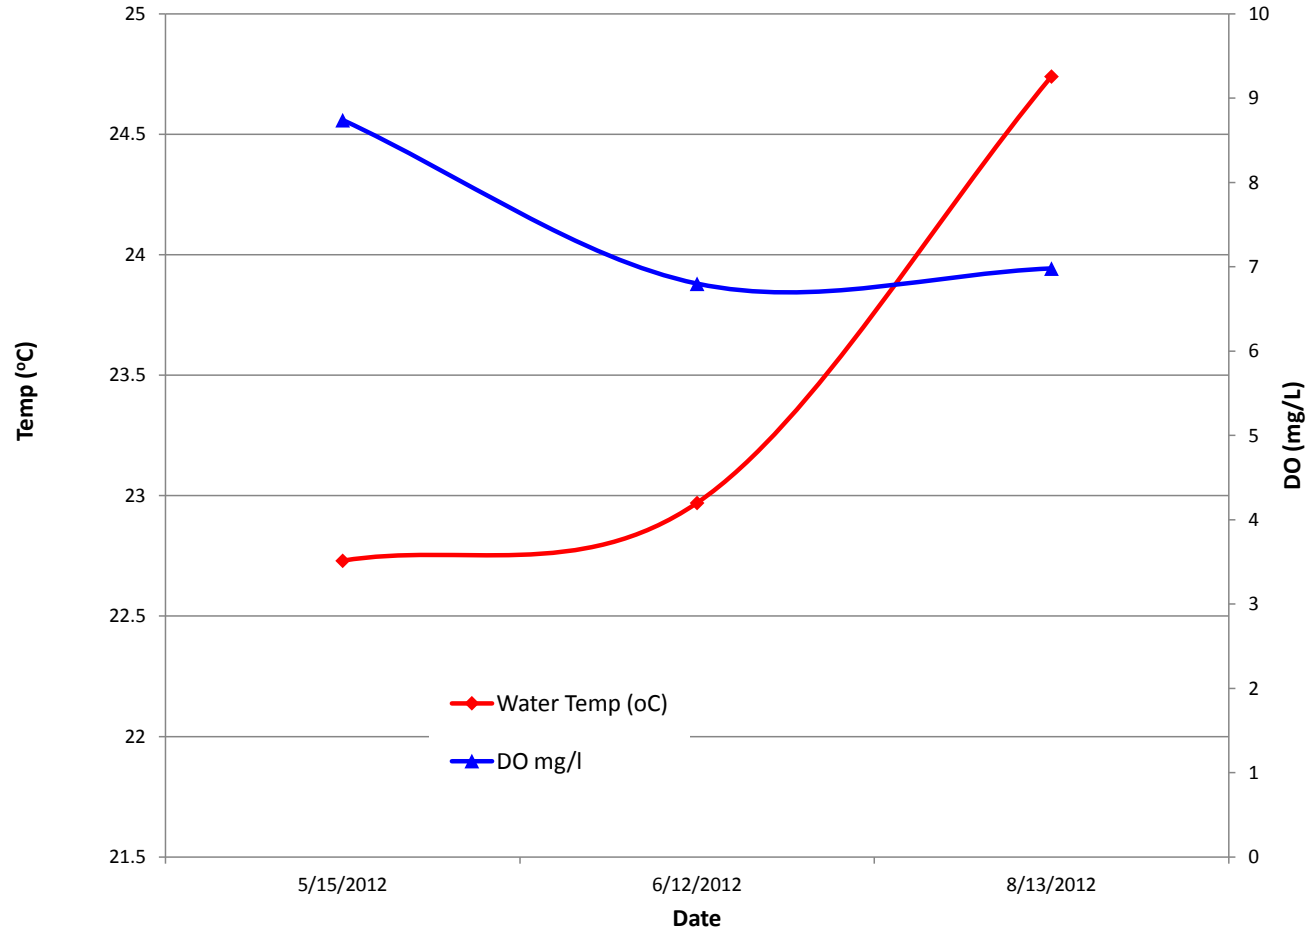



Wappapello Tributary Redox v Conductivity

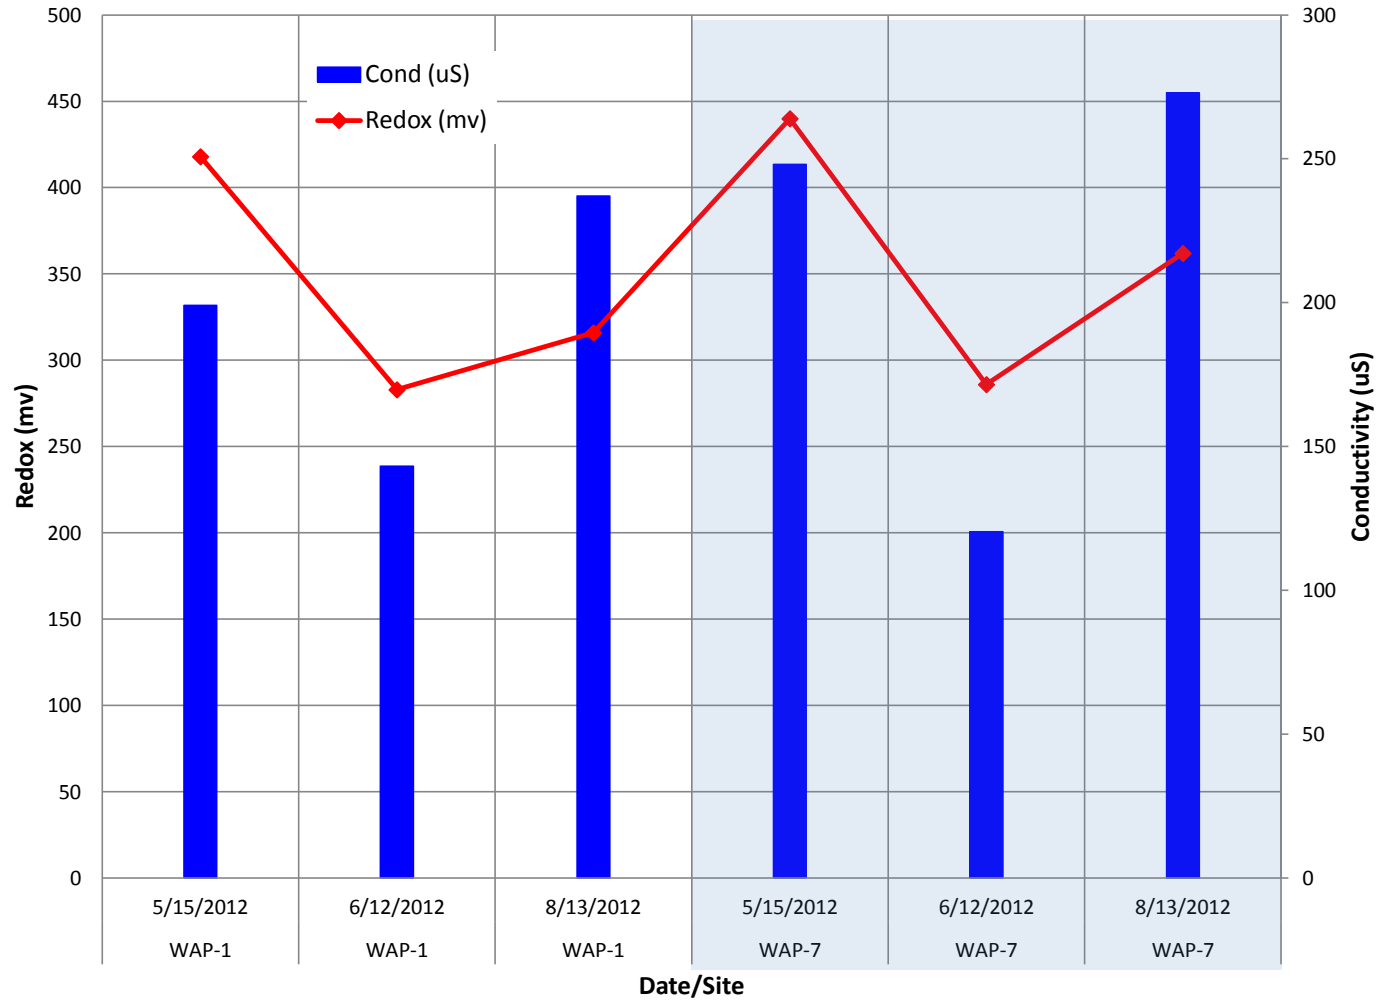



Tributary Redox & Conductivity

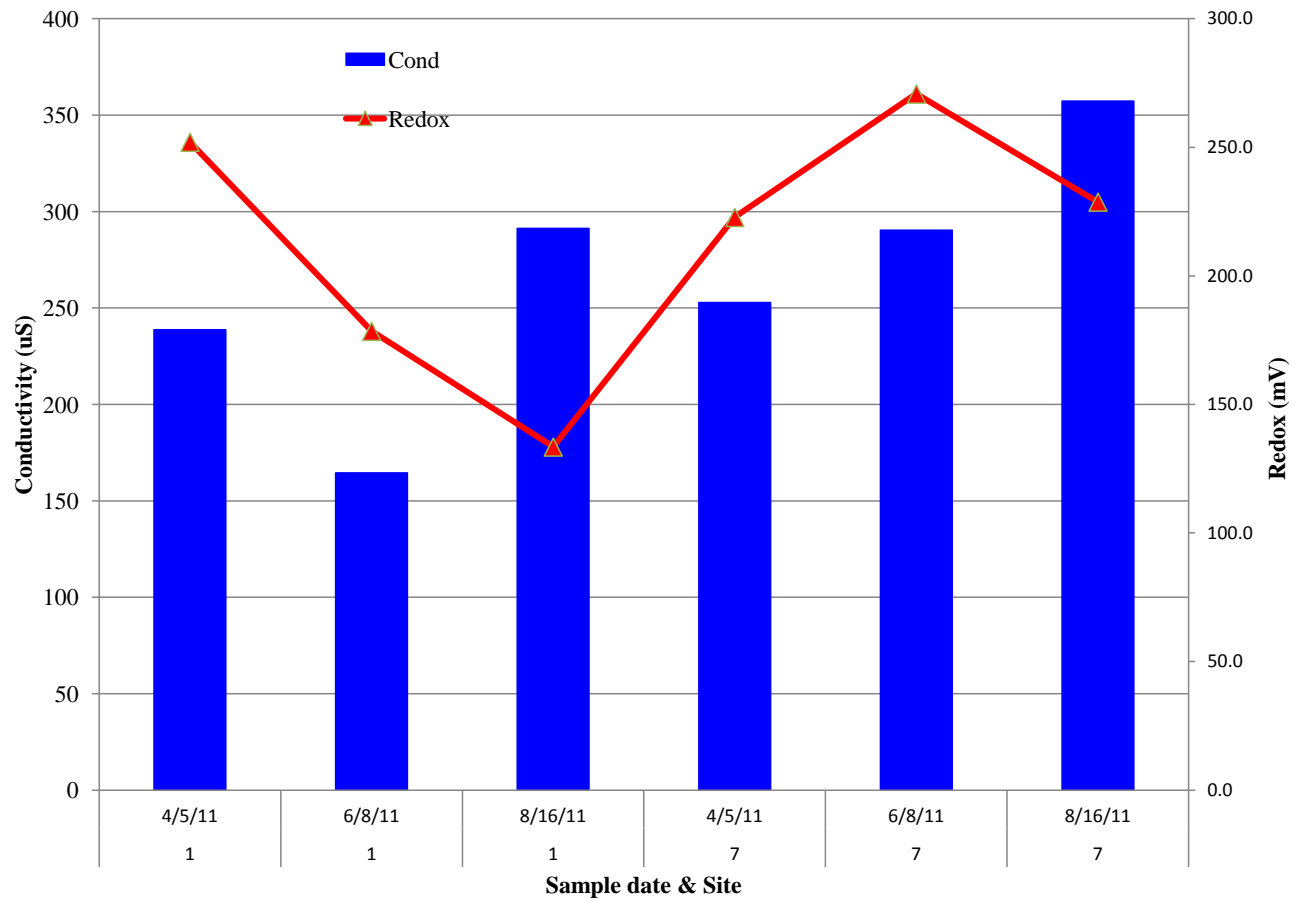


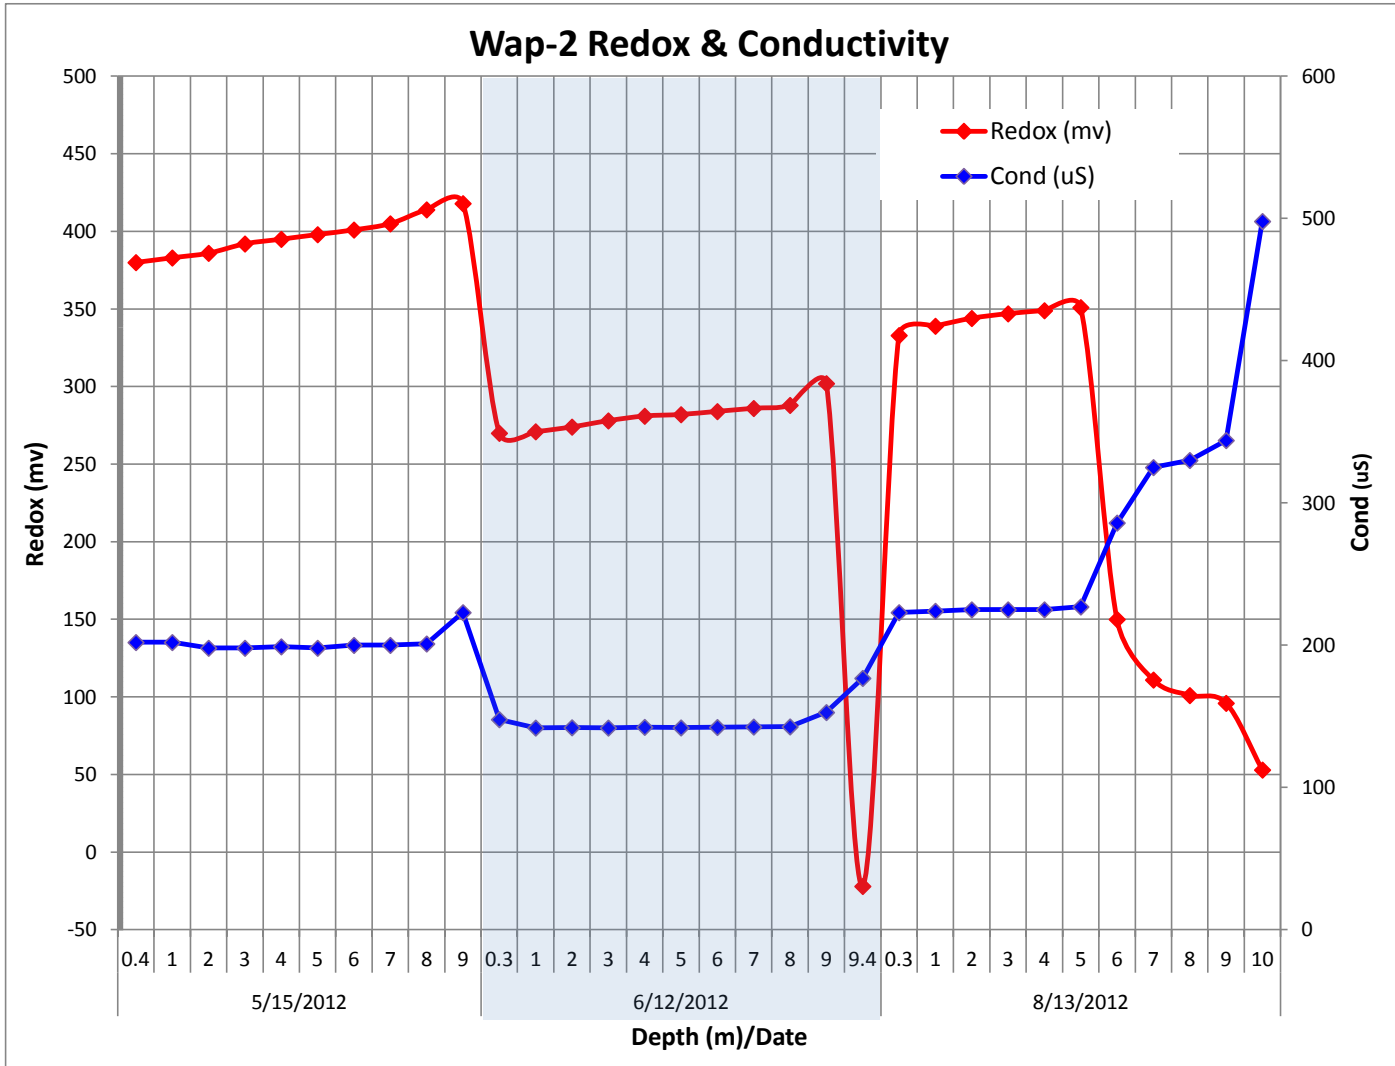


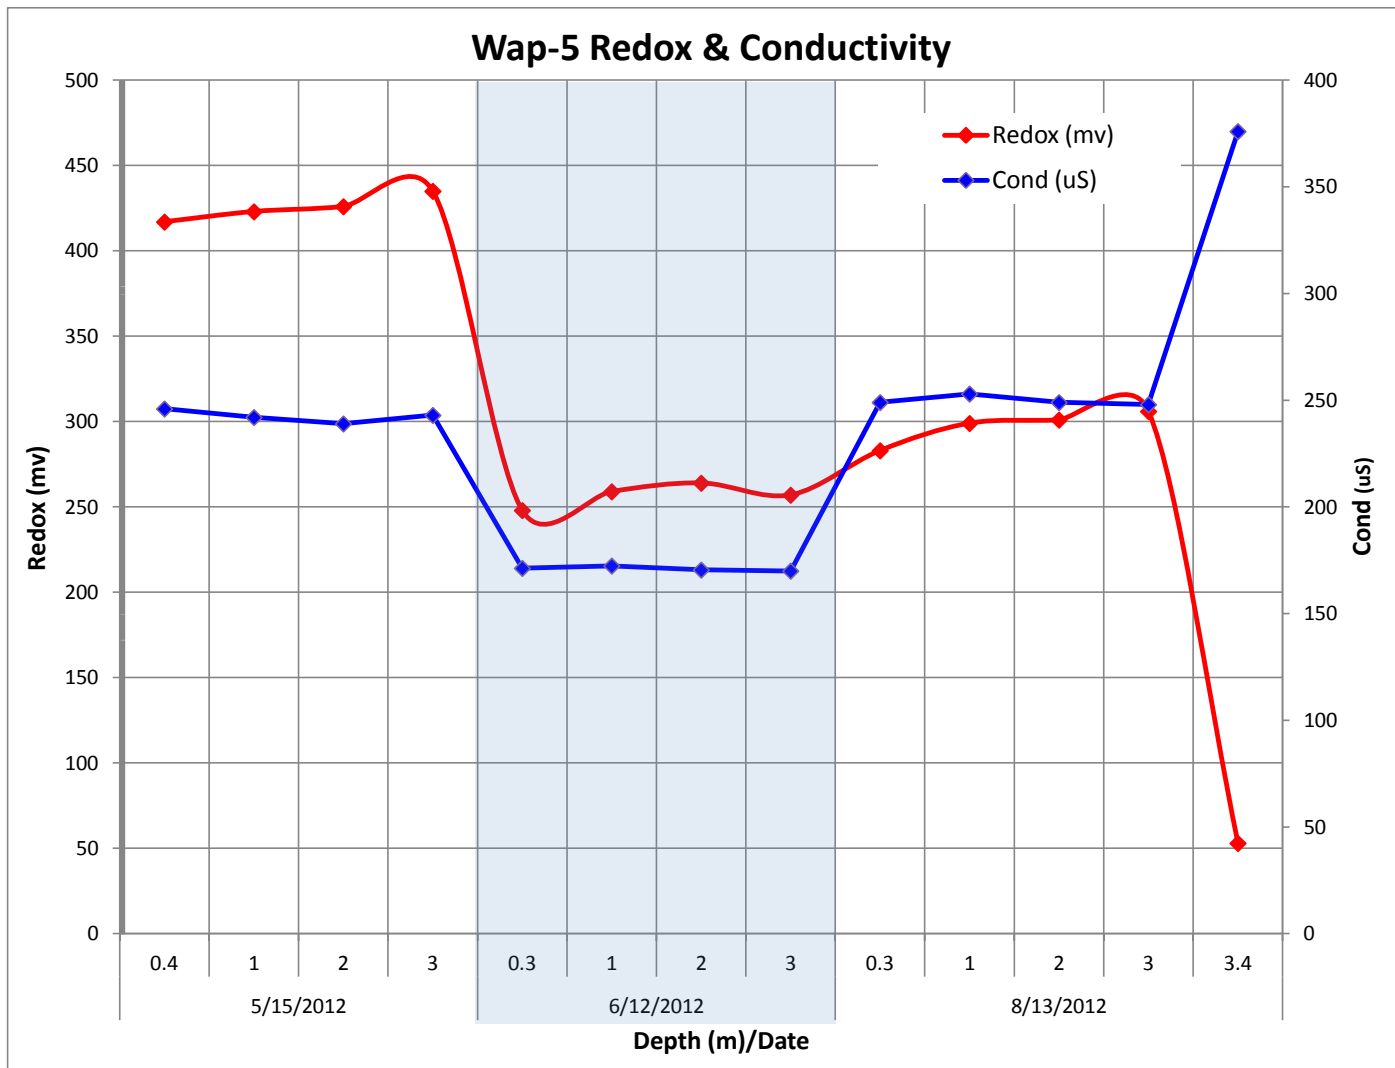


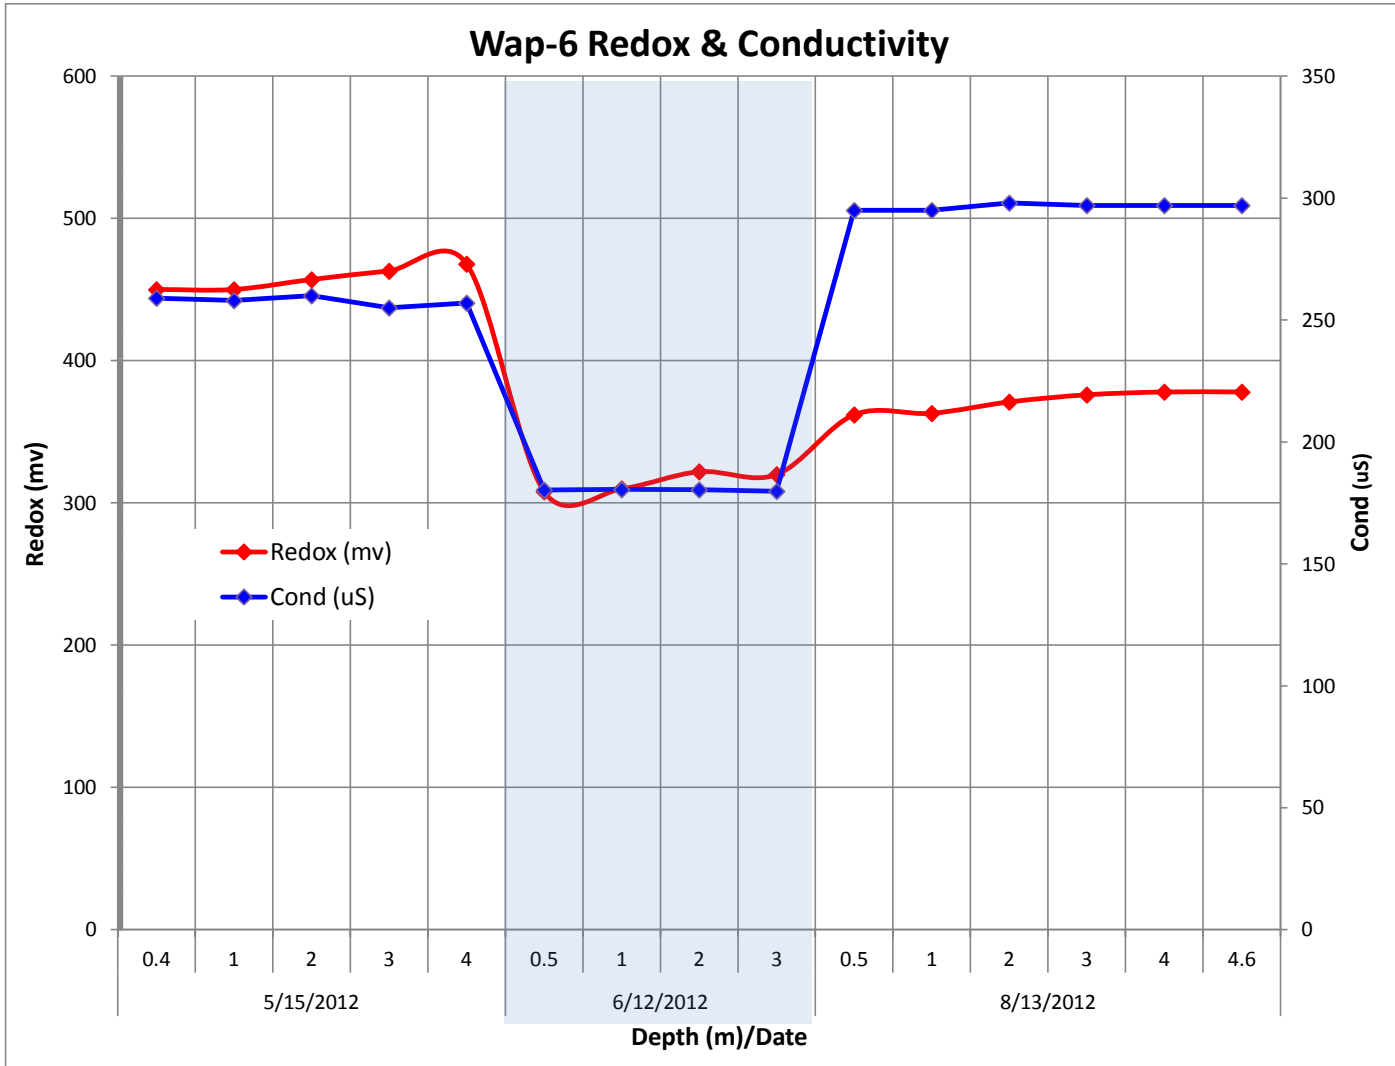


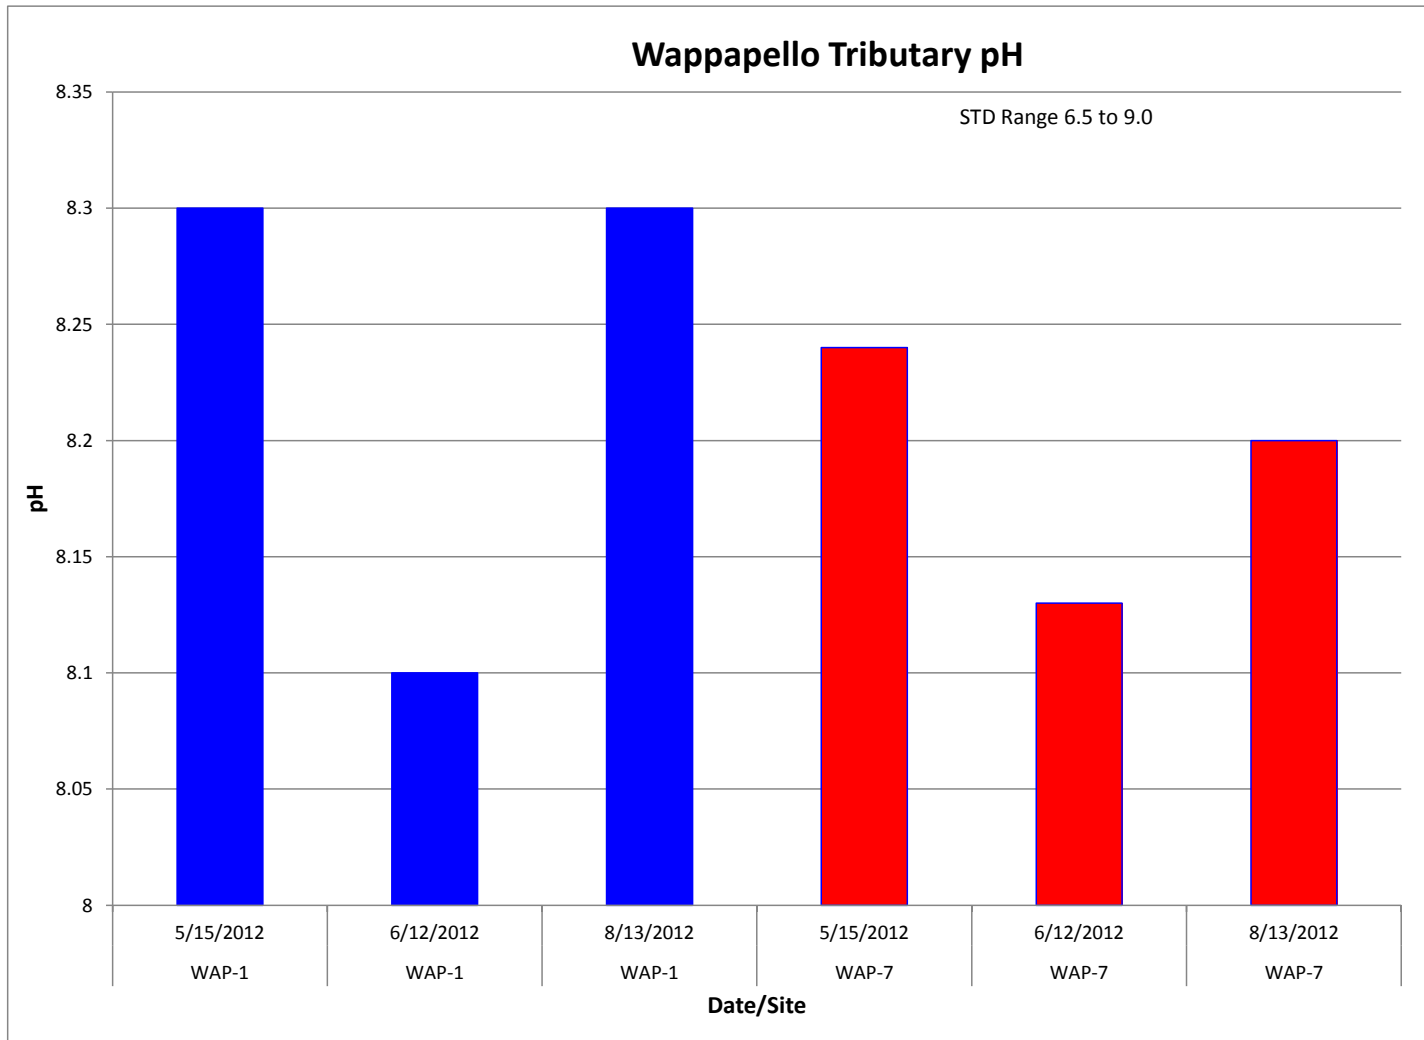

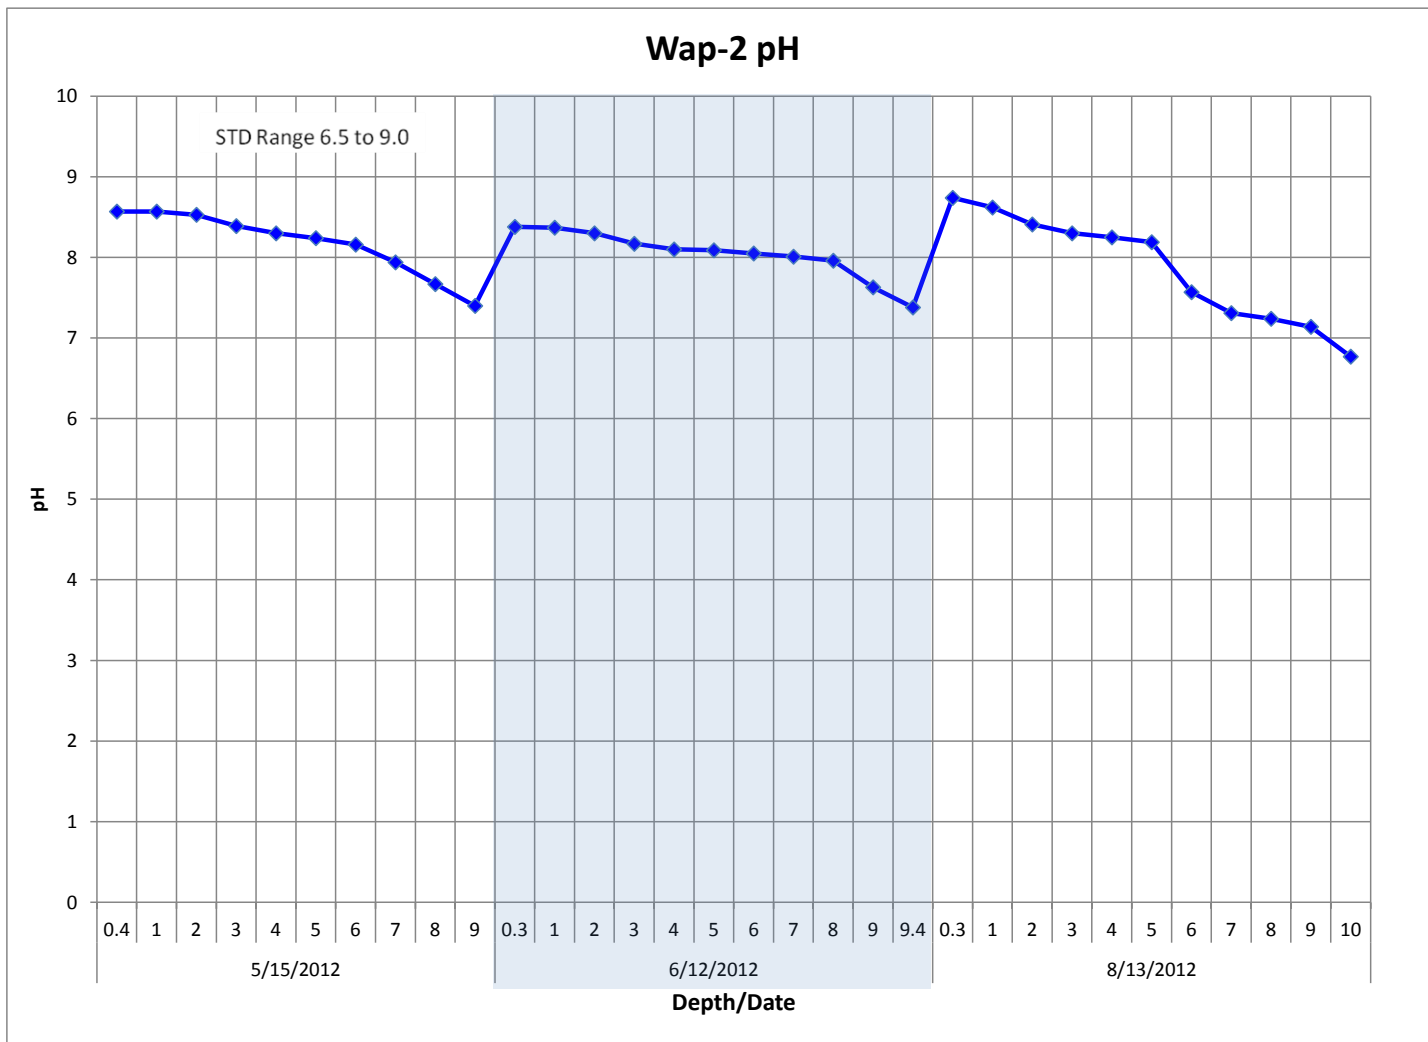

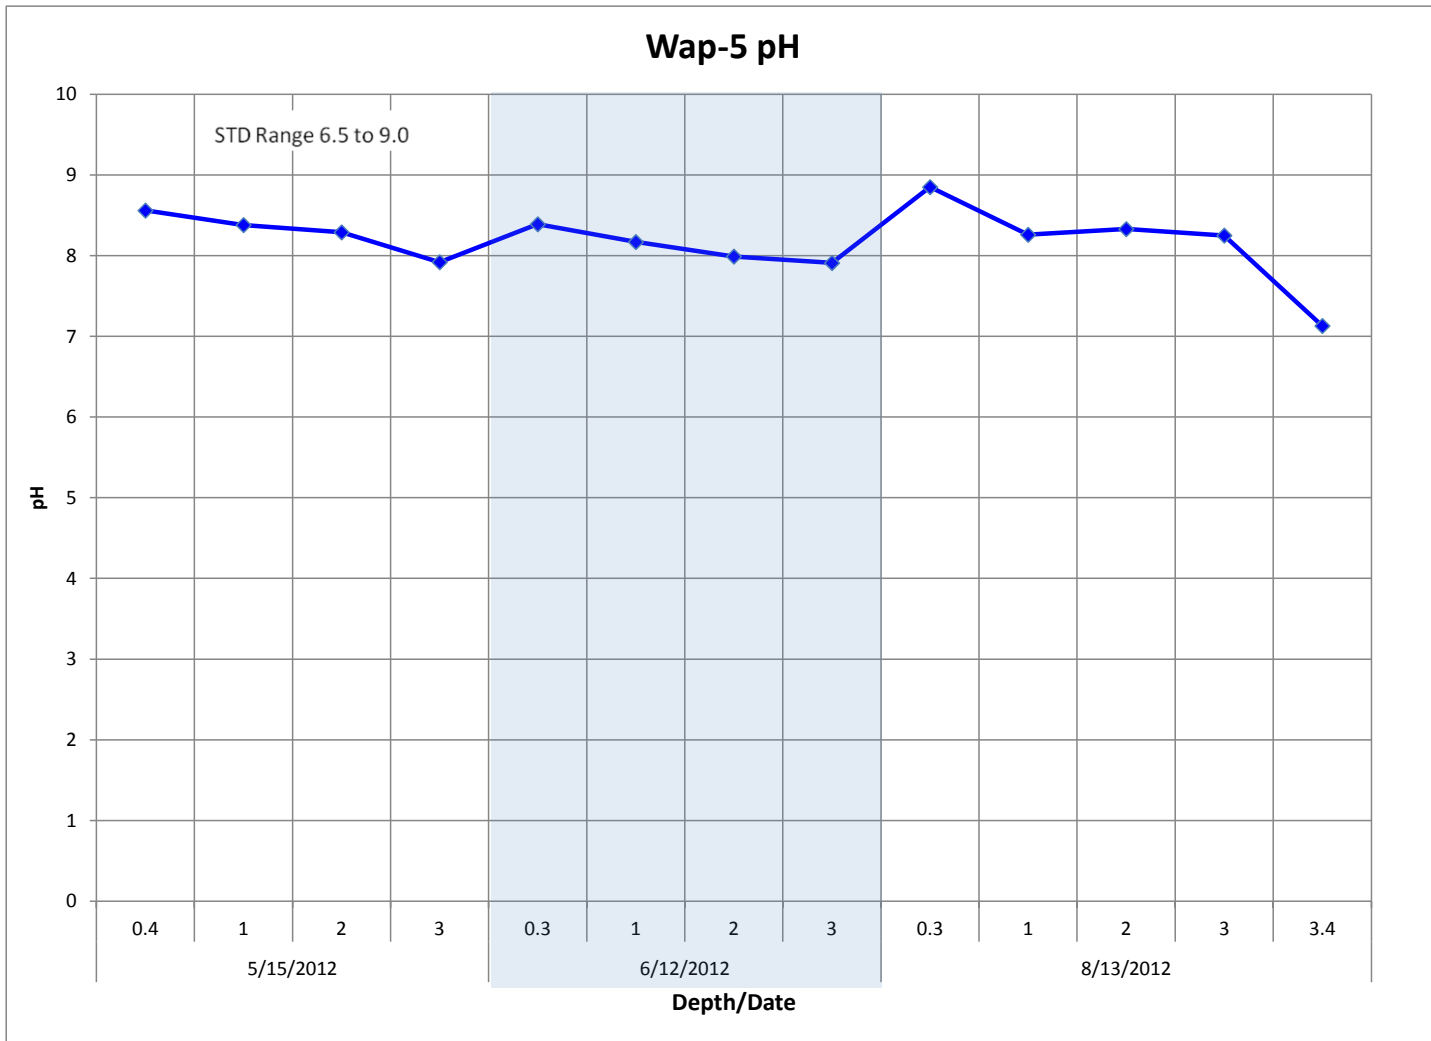

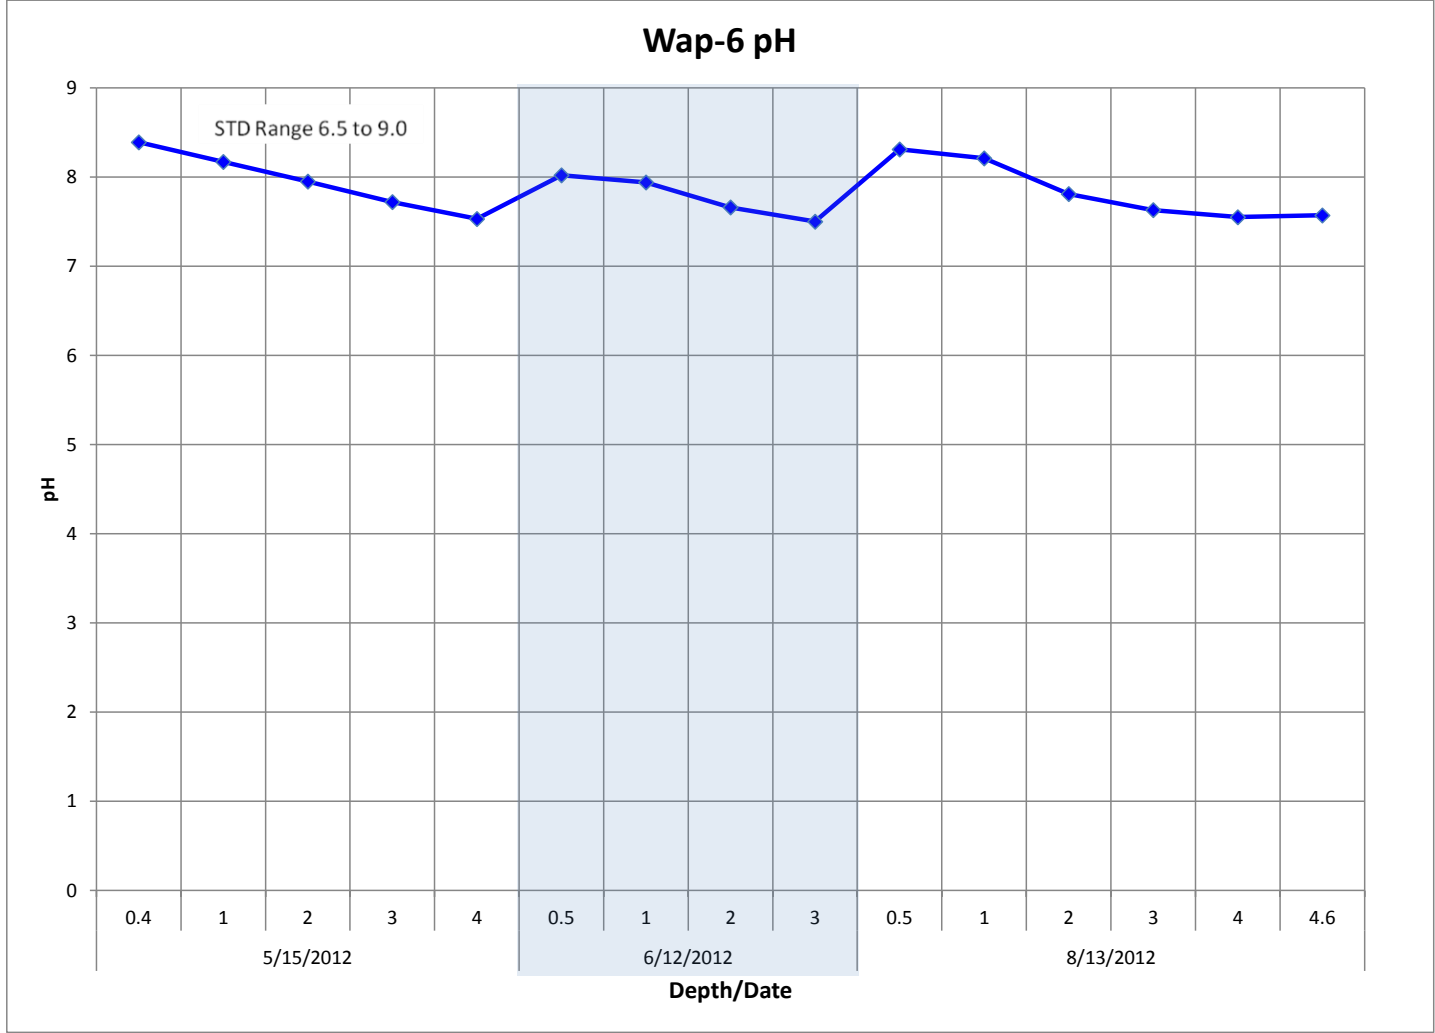

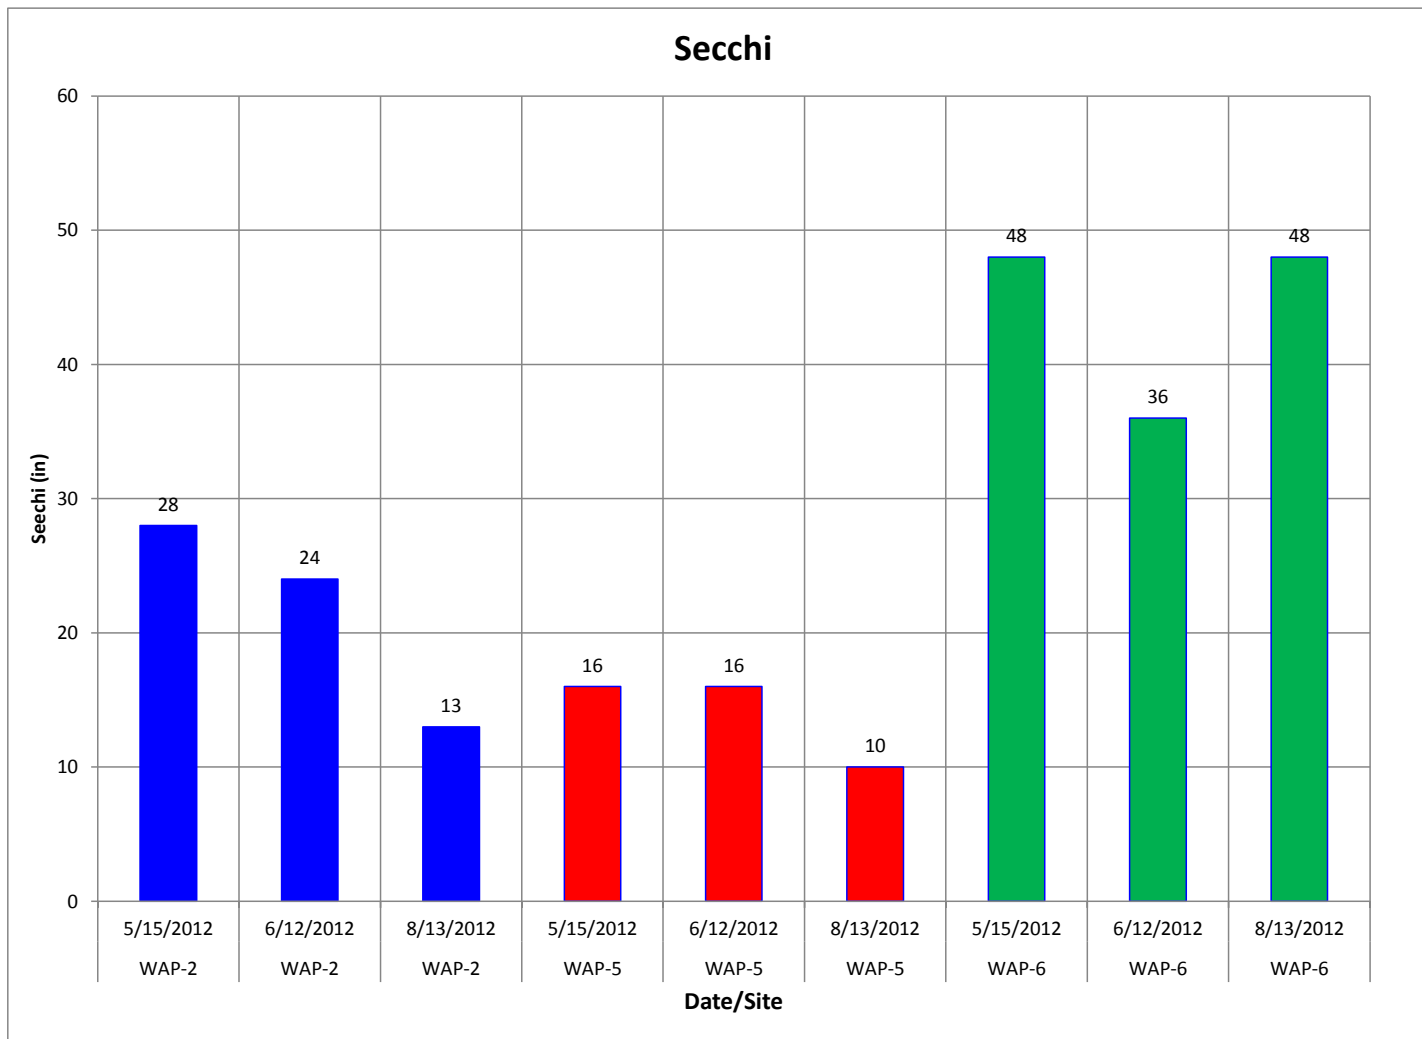

APPENDIX D

Lakes of Missouri Volunteer Monitoring Data

2012 Lakes of Missouri Volunteer Program (LMVP) Data

Site	Date	Temp	Secchi	TP	TN	TCHL	NVSS	VSS	TSS
1	6/18/2012	78	23			16.7			
1	7/3/2012	85	16			78.4			
1	7/31/2012	86	16			117.7			
2	6/18/2012	79	18			25.8			
2	7/3/2012	85	12			96.3			
2	7/31/2012	86	11			122.4			
3	6/18/2012	80	28			1.7			
3	7/31/2012	84	30			6.9			
3	7/3/2012	82	30			8.4			
1DEEP	6/18/2012					52.3			
1DEEP	7/31/2012					52.8			
1DEEP	7/3/2012					95			
2DEEP	7/31/2012					44.2			
2DEEP	6/18/2012					62.9			
2DEEP	7/3/2012					106.6			

Site 1 - Near Dam

Site 1b - Near Dam bottom

Site 2 Sanderson Pt. at Lost Creek

Site 2b - Sanderson Pt. at Lost Creek near bottom

Site 3 - Hwy 34 bridge

Parameter	Abbreviation	Unit of Measure
Water Clarity (using Secchi disk)	Secchi	Inches (“)
Total Phosphorus	TP	Micrograms per liter (ug/L) or parts per billion (ppb)
Total Nitrogen	TN	Micrograms per liter (ug/L) or parts per billion (ppb)
Chlorophyll	CHL	Micrograms per liter (ug/L) or parts per billion (ppb)
Inorganic Suspended Sediments	ISS	Milligrams per liter (mg/L), or parts per million (ppm) 1mg = 1000 ug
Total Suspended Sediments	TSS	Milligrams per liter (mg/L), or parts per million (ppm) 1mg = 1000 ug

Full report for all lakes in the LMVP can be found at <http://www.lmvp.org/lakes.htm>.

APPENDIX E

Beach Data & Graphs

E. coli Beach Samples

Week	Water Temp	Rockwood	Peoples	Redman	48 Hr Rain
7-May-12	81	Closed	<2	Closed	0.14
14-May-12	74	Closed	2	Closed	0
21-May-12	79	<2	<2	<2	0.04
28-May-12	83	<2	<2	<2	0
4-Jun-12	77	4	<2	<2	0.07
11-Jun-12	79	4	2	<2	0.1
18-Jun-12	82	<2	<2	<2	0.44
25-Jun-12	85	2	<2	2	0
2-Jul-12	86	2	8	<2	0
9-Jul-12	88	2	<2	<2	0.8
16-Jul-12	86	<2	<2	13	0.12
23-Jul-12	88	<2	<2	<2	0
30-Jul-12	85	Closed	<2	Closed	1.05
6-Aug-12	81	Closed	2	Closed	0
13-Aug-12	81	Closed	<2	Closed	0
20-Aug-12	79	Closed	<2	Closed	0.08
27-Aug-12	80	Closed	<2	Closed	0.05
3-Sep-12	79	Closed	19	Closed	3.3

E. coli at Beaches

