DOE/OR/20722-141

Formerly Utilized Sites Remedial Action Program (FUSRAP) Contract No. DE-AC05-810R20722

CHARACTERIZATION REPORT FOR THE HAZELWOOD INTERIM STORAGE SITE

Hazelwood, Missouri

June 1987



Bechtel National, Inc.

LEGAL NOTICE :

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

CHARACTERIZATION REPORT FOR THE HAZELWOOD INTERIM STORAGE SITE HAZELWOOD, MISSOURI

JUNE 1987

Prepared for

UNITED STATES DEPARTMENT OF ENERGY

OAK RIDGE OPERATIONS OFFICE

Under Contract No. DE-AC05-810R20722

Ву

K. C. Noey, C. R. Hickey, and A. M. Feldman

Bechtel National, Inc.

Oak Ridge, Tennessee

Bechtel Job No. 14501

ABSTRACT

During October and November 1986 a radiological survey was conducted at the Hazelwood Interim Storage Site (HISS) in Hazelwood, Missouri. The survey was performed as part of the Formerly Utilized Sites Remedial Action Program (FUSRAP), a U.S. Department of Energy (DOE) program to identify, clean up, or otherwise control sites where residual radioactive contamination (exceeding current guidelines) remains from the early years of the nation's atomic energy program or from conditions that Congress has mandated DOE to remedy. Although sampling for chemical contamination was not within the scope of this effort, chemical characterization of the site will be performed before remedial action commences.

It was established that contamination was present at the site on the basis of a radiological survey conducted by Oak Ridge National Laboratory in 1977. The purpose of the 1986 survey was to define the locations and boundaries of the contamination and to provide the data required to estimate the volume of contaminated material on the site. The survey was conducted by the FUSRAP Project Management Contractor, Bechtel National, Inc. (BNI) and its radiological subcontractor, Thermo Analytical/Eberline (TMA/E).

Measurements taken during the 1986 survey indicate that contamination is present on the site in concentrations exceeding current DOE guidelines. Above-guideline contamination was found to extend to a depth of 6 ft below the ground surface at one location. The average depth of contamination at the HISS was found to be approximately 3 ft. The 1986 survey supports the finding of the 1977 ORNL survey that thorium-230 is the principal contaminant at the site.

TABLE OF CONTENTS

		Page
Abbr	eviations:	vi
	·	
1.0	Introduction and Summary	1
	1.1 Introduction	1
	1.2 Purpose and Objectives	1
	1.3 Summary	2
2.0	Site Description and History	3
	2.1 Location and Description	3
	2.2 Site History and Previous Radiological Surveys	. 3
	2.3 Present Site Conditions	5
3.0	Health and Safety Plan	8
	3.1 Subcontractor Training	8
	3.2 Safety Requirements	8
4.0	Survey Procedures	10
	4.1 Field Survey Procedures	10
	4.1.1 Measurements Taken and Methods Used	10
	4.1.2 Sample Collection and Analysis	12
5.0	Survey Results	16
	5.1 Background Measurements	16
	5.2 Surface and Subsurface Measurements	17
Pefe	arences	5.7

LIST OF FIGURES

Figure	Title	Page
2-1	Location of the HISS	4
2-2	The HISS and Its Immediate Vicinity	6
4-1	Survey Grid for the HISS	. 11
4-2	PIC Measurement Locations at the HISS	13
4-3	Soil Sampling Locations at the HISS	15
5-1	Areas and Depths of Contamination	18

LIST OF TABLES

	Table	<u>Title</u>	Pag
•	5-1	Summary of Residual Contamination Guidelines for the HISS	20
-	5-2	Background Radionuclide Concentrations and Radiation Levels in Soil in the St. Louis Area	21
-	5-3	Gamma Radiation Exposure Rates at the HISS	22
-	5-4	Down-hole Gamma Logging Results for the HISS	23
·•	5-5	Radionuclide Concentrations in Soil at the HISS	42

ABBREVIATIONS

centimeter cm counts per minute cpm ft foot h hour in. inch m^2 square meter mi mile μR/h microroentgens per hour pCi/g picocuries per gram

1.0 INTRODUCTION AND SUMMARY

1.1 INTRODUCTION

This report describes the procedures used to conduct a radiological survey during October and November 1986 at the Hazelwood Interim Storage Site (HISS) in Hazelwood, Missouri. The results of the survey are also discussed. The survey was conducted ac part of the Formerly Utilized Sites Remedial Action Program (FUSRAP), a U.S. Department of Energy (DOE) program to identify, clean up, or otherwise control sites where residual radioactive contamination (exceeding current guidelines) remains from the early years of the nation's atomic energy program or from commercial operations causing conditions that Congress has mandated DOE to remedy. Under contract to the DOE, Bechtel National, Inc. (BNI) acts as the Project Management Contractor (PMC) for FUSRAP. The 1986 survey was conducted by BNI and its radiological subcontractor, Thermo Analytical/Eberline (TMA/E).

1.2 PURPOSE AND OBJECTIVES

A radiological survey performed in 1977 by Oak Ridge National Laboratory (ORNL) established that contamination existed at the site (Ref. 1). Although the contamination at Hazelwood did not result directly from the atomic energy program, the Hazelwood properties were added to FUSRAP by Congress to expedite decontamination of the properties. The 1986 radiological survey was necessary to define the locations and boundaries of the contamination identified in the ORNL survey and permit estimation of the volume of contaminated material presently on the site. Although sampling for chemical contaminants was not within the scope of this survey, chemical characterization will be performed before remedial action commences.

1.3 SUMMARY

This characterization confirmed the finding of the 1977 survey that thorium-230 is the principal radioactive contaminant at the HISS, although analysis also identified elevated levels of radium-226 and uranium-238. Thorium-232 concentrations ranged from 0.7 to 5 pCi/g. The maximum concentrations of radium-226 and uranium-238 were found to be 700 and 800 pCi/g, respectively. Selected samples were also analyzed for thorium-230. The maximum thorium-230 concentration detected in these samples was 790 pCi/g; however, the samples that exhibited high concentrations of radium-226 and uranium-238 were not analyzed for thorium-230. Some of these samples can be expected to contain thorium-230 concentrations far in excess of 790 pCi/g.

External gamma radiation levels ranged from 13 to 55 uR/h. The normal background level for the St. Louis area is approximately 8 uR/h.

Gamma logging data and subsurface soil sample analyses were used to determine the depths of contamination. Analysis results indicate the presence of both surface and subsurface contamination. Contamination was found 6 ft below the ground surface at one location. The average depth of contamination at the HISS is approximately 3 ft.

The two contaminated waste storage piles on the HISS were not included as part of the 1986 survey.

2.0 SITE DESCRIPTION AND HISTORY

2.1 LOCATION AND DESCRIPTION

The HISS occupies the eastern half of the property located at 9200 Latty Avenue in northern St. Louis County within the city limits of Hazelwood, Missouri. It is approximately 2 mi northeast of the control tower of the Lambert-St. Louis International Airport. The location of the HISS is shown in Figure 2-1. The property is owned by Jarboe Realty and Investment Company. A chain link fence separates the HISS from the western half of the property at 9200 Latty Avenue, which is known as the Futura Coatings site (Figure 2-2).

2.2 SITE HISTORY AND PREVIOUS RADIOLOGICAL SURVEYS

In 1966, ore residues and uranium- and radium-bearing process wastes being stored at the St. Louis Airport Site (SLAPS) were purchased by the Continental Mining and Milling Company of Chicago, Illinois and placed in storage at 9200 Latty Avenue. These wastes were generated by a St. Louis plant between 1942 and the late 1950s under contracts with the Atomic Energy Commission (AEC) and its predecessor, the Manhattan Engineer District (MED). These residues included pitchblende raffinates, Colorado raffinates, uranium-bearing residues, and barium sulfate cake. The Commercial Discount Corporation of Chicago purchased the residues in January 1967; much of the material was then dried and shipped to the Cotter Corporation facilities in Canon City, Colorado. The material remaining at the Latty Avenue site was sold to the Cotter Corporation in December 1969. Between August and November of 1970, Cotter Corporation dried some of the residues remaining at the site and shipped them to its mill in Canon City. In December 1970, an estimated 10,000 tons of Colorado raffinate and 8,700 tons of leached barium sulfate remained at the Latty Avenue site.

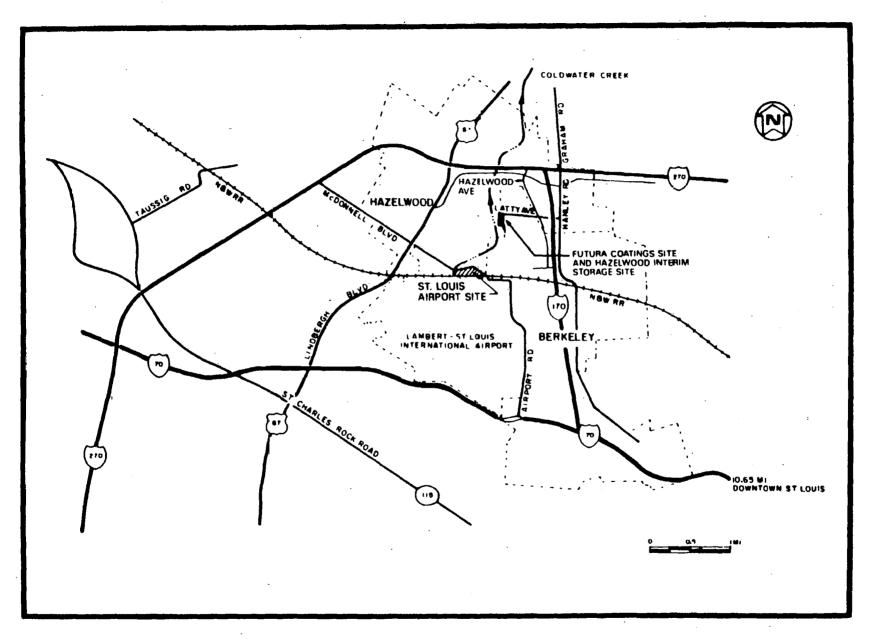


FIGURE 2-1 LOCATION OF THE HISS

In April 1974, the newly established Nuclear Regulatory Commission (NRC) was informed by Cotter Corporation that the remaining Colorado raffinate had been shipped in mid-1973 to Canon City without having been dried and that barium sulfate residues had been diluted with soil from the site and transported to a landfill area in St. Louis County. Reportedly, a 12- to 18-in. layer of topsoil was removed with the residues.

In 1976, measurements taken by the NRC of radiation levels and of radionuclide concentrations in the soil indicated that residual uranium and thorium concentrations and exposure levels at 9200 Latty Avenue exceeded existing guidelines for release for unrestricted use. A radiological characterization of the site was also performed by ORNL in the summer of 1977 prior to occupation of the site by the current owner (Ref. 1). Surface contamination exceeding DOE guidelines for thorium and radium was found in and around the buildings on the western half of the property (the Futura Coatings site). Subsurface soil contamination was found at depths as great as 18 in.

In 1981 Oak Ridge Associated Universities (ORAU) characterized the storage pile on the eastern half of the property (now called the HISS) and performed a radiological survey of the northern and eastern boundaries of the property (Ref. 2). Levels of contamination (principally thorium-230) similar to those on the property were found in both areas. As a follow-up to this survey, ORNL conducted a detailed radiological survey of the north and south shoulders of Latty Avenue for DOE in January and February 1984. Results indicated that contamination in excess of DOE guidelines was present along most of Latty Avenue, almost as far as Hazelwood Avenue. Properties adjacent to the HISS were also found to be contaminated.

2.3 PRESENT SITE CONDITIONS

The HISS currently consists of access roads, a vehicle decontamination facility, and two storage piles (Figure 2-2).

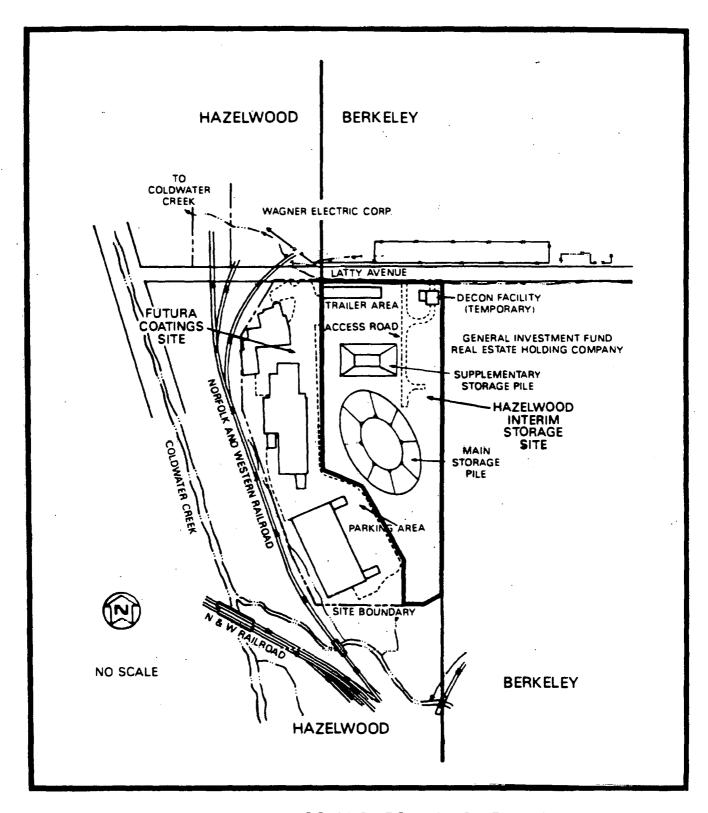


FIGURE 2-2 THE HISS AND ITS IMMEDIATE VICINITY

In preparing the western half of the property for commercial use, the owner demolished one building, excavated several areas, paved several others, and erected a number of new buildings. The materials excavated during these activities (approximately 13,000 yd³) formed the original pile on the HISS.

Remedial action was conducted at Latty Avenue in 1984 and 1985; it continued in 1986, when it was performed concurrently with a drainage system improvement project being conducted by the cities of Hazelwood and Berkeley. The contaminated materials excavated from Latty Avenue during the course of construction activities were hauled to the HISS and placed in a supplementary storage pile that was developed specifically to accommodate these materials.

3.0 HEALTH AND SAFETY PLAN

BNI is responsible for protecting the health and safety of personnel assigned to work at the site. As such, BNI and Eberline personnel must comply with the requirements of the applicable Project Instructions (PI) contained in the FUSRAP Radiological Protection Program Manual (Ref. 3) as directed by the on-site BNI representative.

3.1 SUBCONTRACTOR TRAINING

Before the start of work, all characterization personnel attended an orientation session presented by the BNI representative to explain the nature of the material that would be encountered during the course of the characterization and the personnel monitoring and safety measures that would be required.

3.2 SAFETY REQUIREMENTS

Personnel were required to comply with the BNI safety requirements set forth in the applicable Project Instructions contained in Reference 3 and summarized below:

- o Bioassay (PI 21.18) -- Personnel shall submit bioassay samples before or at the beginning of on-site activity, upon completion of the activity, and periodically during site activities as requested by BNI.
- o Protective Clothing/Equipment (PI 21.12) -- Personnel must wear the protective clothing/equipment specified by the BNI representative.
- o Dosimetry (PI 21.05) -- Personnel are required to wear the dosimeters and monitors issued by BNI and return them to the BNI representative at the end of each day.
- o Controlled Area Access/Egress (PI 21.08, 21.10) -- Personnel and equipment entering areas where access and egress are controlled for the purpose of radiological safety will be radiologically surveyed by the BNI representative before leaving the area.

Health and safety surveillance of all activities related to the scope of work was conducted under the direct supervision of personnel representing BNI. The health protection requirements applicable to activities that involve radiation or the handling of radioactive materials are delineated in PI 20.01, Reference 3. Copies of the applicable Project Instructions were available at the site during the characterization.

4.0 SURVEY PROCEDURES

4.1 FIELD SURVEY PROCEDURES

A civil surveyor established a 50-ft grid on the HISS by staking the intersections of a series of mutually perpendicular lines. The grid spanned the entire HISS with the exception of the two contaminated waste storage piles, which were not included in the survey. The grid origin used during the remedial action conducted in 1984 along the Latty Avenue right-of-way was reestablished (Figure 4-1). All characterization data correspond to coordinates on this grid. The types of radiological measurements taken and the methods used are described in the following subsections.

4.1.1 Measurements Taken and Methods Used

An initial walkover survey was performed within the grid blocks of the entire HISS (with the exception of the storage piles) using an unshielded gamma scintillation detector. Areas in which readings exceeded twice normal background levels were marked on a site drawing.

Near-surface gamma measurements were made 12 in. above the ground surface at 12.5-ft intervals in areas identified as contaminated on the basis of the walkover survey. A 2- by 2-in. sodium-iodide (NaI) detector was used during this survey. This detector (EIC model SPA-3) was mounted in a probe assembly surrounded with a conical lead shield to reduce the gamma intensity through the sides, thus producing a downward directional response.

Gamma exposure rates at 3 ft above the ground were measured using a pressurized ionization chamber (PIC) with a response to

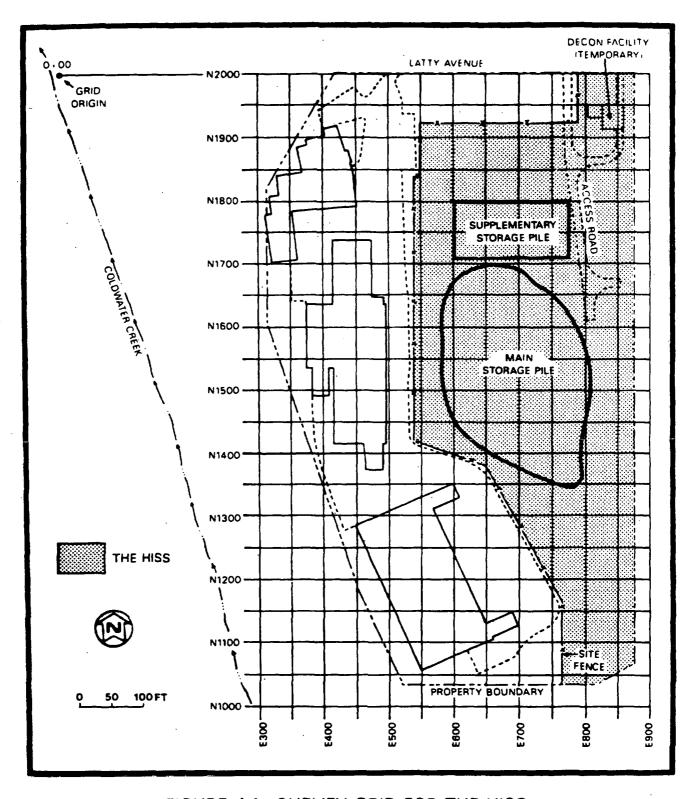


FIGURE 4-1 SURVEY GRID FOR THE HISS

gamma radiation that is proportional to exposure in roentgens. Readings were made at 15 selected grid points on the site (Figure 4-2).

The subsurface investigation was conducted by drilling 36 boreholes, each to a depth of 10 ft, at most 100-ft grid intersections. The 100-ft interval was designed to maximize the amount of information to be obtained in the most cost-effective manner possible. The number of boreholes in each area and the locations of the holes were based on near-surface gamma measurements made in the area.

Although gamma logging is typically used to determine the depth of subsurface contamination, thorium-230 (the principal contaminant) cannot be detected in situ; therefore, continuous subsurface soil samples were collected from the surface to a depth of 10 ft by rotating a Consolidated Mine Equipment (CME) sampler in advance of the auger. Each characterization hole was gamma logged to determine the depth of gamma-emitting contamination. Gamma logging was conducted by lowering a gamma scintillometer into the hole and taking radiation measurements at 6-in. vertical intervals in order to obtain a profile of the depth of gamma-emitting contamination.

4.1.2 Sample Collection and Analysis

Continuous sampling was performed in each hole in 1-ft increments. All samples were analyzed for uranium-238, radium-226, and thorium-232. Experience has shown that as long as radium-226 concentrations are elevated, it is reasonable to assume that the thorium-230 concentration exceeds the DOE guideline of 15 pCi/g for soil. Since analysis for thorium-230 is costly, the number of samples subjected to this type of analysis was minimized. For each borehole, samples were selected for thorium-230 analysis beginning at the depth where down-hole gamma logs indicated that radium-226 concentrations

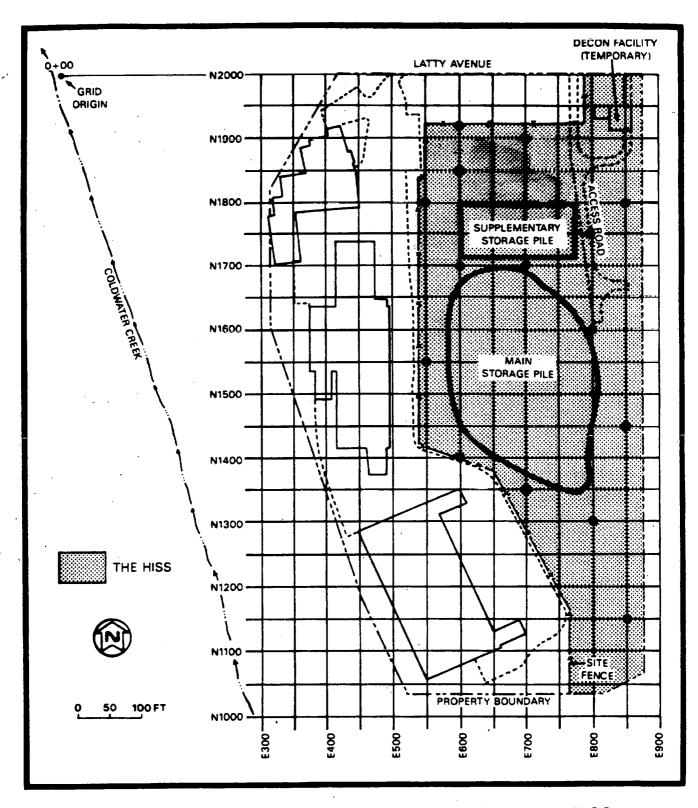


FIGURE 4-2 PIC MEASUREMENT LOCATIONS AT THE HISS

were below guidelines. From this point, samples from successively greater depths were analyzed for thorium-230 until below-guideline results for thorium-230 were also obtained. Based on what is known about the history of the site and the means by which it became contaminated, it was assumed that no stratified layer of thorium-230 existed below the depths at which sampling indicated thorium-230 concentrations to be in compliance with DOE remedial action guidelines.

For boreholes where gamma logs did not indicate the presence of gamma-emitting contamination exceeding guideline levels, samples were collected from areas of interest in the respective borehole and analyzed for thorium-230. Such areas of interest may include isolated spots that exhibit elevated gamma log results, areas that exhibit trends in the gamma log results regardless of level, and surface soil samples.

Soil samples were collected at the 36 borehole locations (Figure 4-3). Each sample was counted for 10 minutes using an intrinsic germanium detector housed in a lead shield lined with cadmium and copper. The pulse height distribution was sorted using a computer-based, multi-channel analyzer. Radionuclide concentrations were determined by comparing the gamma spectrum of each sample with the spectrum of a certified counting standard for the radionuclide of interest.

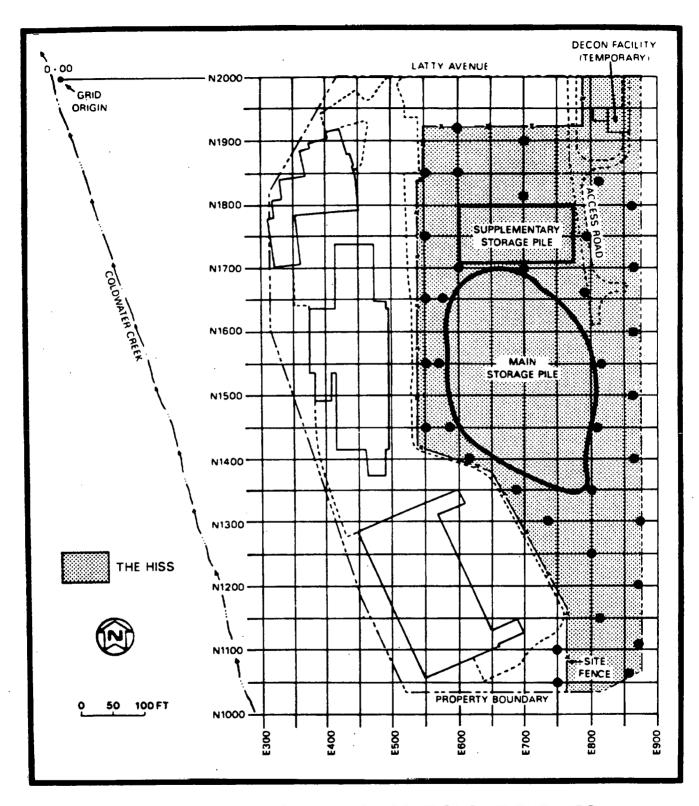


FIGURE 4-3 SOIL SAMPLING LOCATIONS AT THE HISS

5.0 SURVEY RESULTS

The results of the surveys described in Section 4.0 are presented in this section. To permit comparison of the results to current DOE guidelines for radionuclides in soil, these guidelines are presented in Table 5-1 (Ref. 4).

All direct field measurements and laboratory results in this report represent gross readings; background measurements and concentrations have not been subtracted.

5.1 BACKGROUND MEASUREMENTS

Near-surface gamma levels, gamma exposure rates, and gamma radiation at 3 ft above the ground surface were measured at three background locations in the St. Louis area. The average near-surface gamma level was approximately 4,000 cpm, and gamma radiation levels 3 ft above the ground surface averaged approximately 7,000 cpm. The average background gamma exposure rate was 8 uR/h. Individual background measurements are listed in Table 5-2.

Background external gamma exposure rates have also been measured in the St. Louis Area by Oak Ridge National Laboratory; the average rate was found to be approximately 6 uR/h (Ref. 5).

Average background concentrations of uranium-234, -235, and -238 measured in surface soils at the three background locations were 1.0, less than 0.1, and 1.0 pCi/g, respectively. The average background concentration of radium-226 was 0.5 pCi/g. Average background concentrations of thorium-230 and thorium-232 were 0.2 and 0.4 pCi/g, respectively. The average background concentration of lead-210 was 1.0 pCi/g. Analysis results for each background location are listed in Table 5-2.

5.2 SURFACE AND SUBSURFACE MEASUREMENTS

Near-surface gamma radiation levels at the HISS ranged from approximately 10,000 cpm to approximately 475,000 cpm. Gamma radiation exposure rates ranged from 13 to 55 uR/h. The average exposure rate for the site was 24 uR/h. Gamma radiation exposure rates at the HISS are presented in Table 5-3.

The field survey at the HISS revealed areas with elevated concentrations of radium-226 and thorium-230 in surface and subsurface samples. Thorium-230 was identified as the major contaminant.

Down-hole gamma logging was performed to indicate the general depth and concentration of gamma-emitting contamination. Detailed gamma logging results are reported in Table 5-4. The depth of contamination was found to range from surface contamination to subsurface contamination at a depth of 6 ft. Only one location exhibited contamination at the maximum depth of 6 ft. The average depth of contamination on the site is approximately 3 ft.

The areal limits of contamination were determined on the basis of the DOE guideline of 5 pCi/g for thorium-230, thorium-232, and radium-226 when averaged over the uppermost 15-cm layer of soil, and 15 pCi/g when averaged over 15-cm thick layers of soil more than 15 cm below the surface (Table 5-1). The areas and depths of contamination at the HISS are shown in Figure 5-1.

Analysis results for soil are provided in Table 5-5. Use of the "less than" (<) notation indicates that the radionuclide was not present in measurable concentrations. The value following the less than notation is the minimum detectable amount (MDA). The MDA is based on various factors, including the volume, size, and weight of the sample; the type of detector used; the counting time, and the background count rate. In addition,

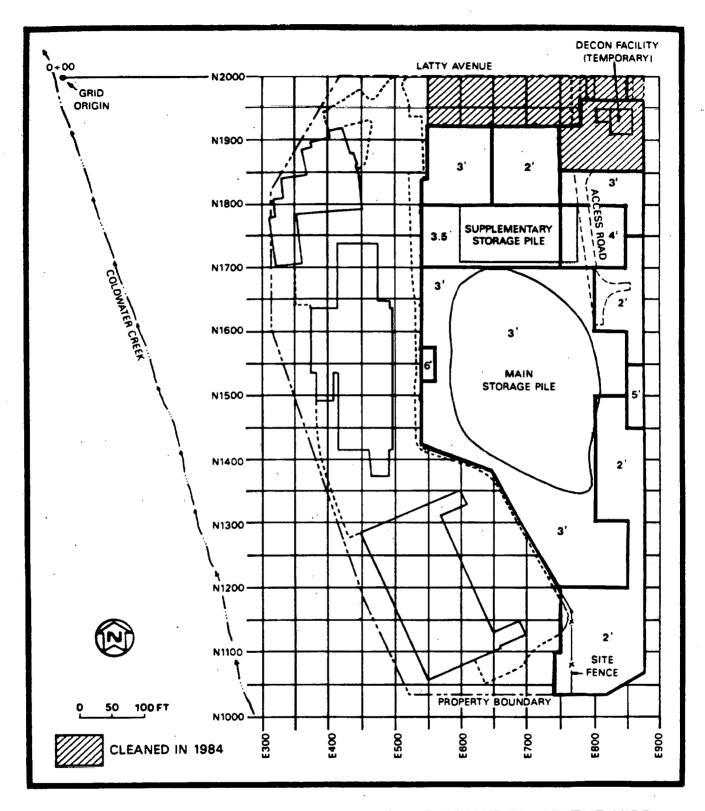


FIGURE 5-1 AREAS AND DEPTHS OF CONTAMINATION AT THE HISS

since radioactive decay is a random process, a correlation between the rate of disintegration and a given radionuclide concentration cannot be precisely established; therefore, the exact concentration of the radionuclide cannot be determined. As such, each value that is equal to or greater than the MDA has an associated uncertainty term (+), which represents the maximum amount by which the actual value can be expected to differ from the value given in the table. The uncertainty term has an associated confidence level of 95 percent.

Thorium-232 concentrations ranged from background levels to 5 pCi/g. Radium-226 concentrations above the DOE guideline were found in several samples, with concentrations up to 700 pCi/g. Uranium-238 concentrations ranged from 4 to 800 pCi/g. Concentrations of thorium-230 ranged from 0.8 to 790 pCi/g in the selected samples analyzed; however, it is highly probable that the maximum thorium-230 concentration on the property is much greater than was indicated by analysis results, since only those samples with no associated gamma-emitting radionuclides were analyzed for thorium-230.

TABLE 5-1

SUMMARY OF RESIDUAL CONTAMINATION GUIDELINES FOR THE HISS

BASIC DOSE LIMITS

The basic limit for the annual radiation dose received by an individual member of the general public is 100 mrem/yr.

SOIL (LAND) GUIDELINES (MAXIMUM LIMITS FOR UNRESTRICTED USE)

Radionuclide	Soil Concentration (pCi/g) above background a,b,c
Red I um-226	5 pCI/g, averaged over the first 15 cm of soil below
Rad 1 um - 228	the surface; 15 pCl/g when averaged over any 15-cm-
Thorlum-230	thick soil layer below the surface layer.
Thortum-232	
Other radionucildes	Soil guidelines will be calculated on a site-specific basis using the DOE manual developed for this use.

These guidelines take into account ingrowth of radium-226 from thorium-230 and of radium-228 from thorium-232, and assume secular equilibrium. If either thorium-230 and radium-226 or thorium-232 and radium-228 are both present, not in secular equilibrium, the guidelines apply to the higher concentration. If other mixtures of radionuclides occur, the concentrations of individual radionuclides shall be reduced so that the dose for the mixtures will not exceed the basic dose limit.

 $^{^{\}rm b}$ These guidelines represent unrestricted-use residual concentrations above background averaged across any 15-cm-thick layer to any depth and over any contiguous 100-m 2 surface area.

 $^{^{\}rm c}$ Localized concentrations in excess of these limits are allowable provided that the average concentration over a $100-m^2$ area does not exceed these limits.

TABLE 5-2

BACKGROUND RADIONUCLIDE CONCENTRATIONS AND RADIATION LEVELS IN SOIL IN THE ST. LOUIS AREA

Measurement	Genma Exposure Rate at 3-1+	Gamma Radiation at 3 ft	Near-Surface Gamma Radiation		•	Redionucii	de Concentrat	lon {pCl/g}		
Location	(uR/h)	(cpm)	(cpm)	Uranlum-234	Uranium-235	Uranlum-238	Radlum-226	Thor I um-230	Thor Lun-232	Lead-210
ı	8	7000	4000	1,2 + 0,2	0,1	1,2 + 0,2	0,7 <u>+</u> 0,1	0.1 + 0.1	0.3 + 0.1	0.6 <u>+</u> 0.4
2	8	7000	4000	0.6 + 0.2	0.1	0.6 + 0.1	0.3 + 0.1	0.5 + 0.1	0.5 <u>+</u> 0.1	2.0 <u>+</u> 0,5
3	8	8000	5000	1.3 + 0.3	0.1 + 0.1	1.3 + 0.2	0.4 + 0.1	0.3 + 0.1	0.3 + 0.1	0.5 + 0.4

Average	8	7000	4000	1.0 <u>+</u> 0.2	0.1	1.0 + 0.2	0.5 ± 0.1	0.2 + 0.1	0.4 + 0.1	1.0 + 0.4

TABLE 5-3

GAMMA RADIATION EXPOSURE RATES

AT THE HISS

Coordi	nates	
East	North	μR/h
550.0	1550.0	35
550.0	1800.0	55
600.0	1400.0	19
600.0	1700.0	47
600.0	1850.0	36
600.0	1925.0	14
700.0	1350.0	17
700. 0	1700.0	23
700.0	1900.0	15
800.0	1300.0	16
800.0	1600.0	15
800.0	1750.0	16
850.0	1150.0	22
850.0	1450.0	22
850.0	1800.0	13

TABLE 5-4

DOWN-HOLE GAMMA LOGGING RESULTS FOR THE HISS

Page 1 of 19

	inates	Depth	SPA-3 Count	Rate
East	North	(ft)	(cbw)	
550.0	1450.0	0.0	54000	
550.0	1450.0	0.5	103000	
550.0	1450.0	1.0	92000	
550.0	1450.0	1.5	65000	
550.0	1450.0	2.0	83000	
550.0	1450.0	2.5	62000	
550.0	1450.0	3.0	27000	
550.0	1450.0	3.5	19000	
550.0	1450.0	4.0	17000	
550.0	1450.0	4.5	16000	
550.0 550.0	1450.0 1450.0	5.0 5.5	15000	
550.0	1450.0	6.0	14000 14000	
550.0	1450.0	6.5	13000	
550.0	1450.0	7.0	12000	
550.0	1450.0	7.5	13000	
550.0	1450.0	8.0	13000	
550.0	1450.0	8.5	13000	
550.0	1450.0	9.0	13000	
550.0	1450.0	9.5	13000	
550.0	1450.0	10.0	14000	
550.0	1550.0	0.0	69000	
550.0	1550.0	0.5	154000	
550.0	1550.0	1.0	128000	
550.0	1550.0	1.5	42000	
550.0	1550.0	2.0	22000	
550.0	1550.0	2.5	16000	
550.0	1550.0	3.0	16000	
550.0 550.0	1550.0 1550.0	3.5 4.0	15000	
550.0	1550.0	4.5	15000 15000	
550.0	1550.0	5.0	15000	•
550.0	1550.0	5.5	15000	
550.0	1550.0	6.0	14000	
550.0	1550.0	6.5	13000	
550.0	1550.0	7.0	13000	
550.0	1550.0	7.5	13000	
550.0	1550.0	8.0	13000	
550.0	1550.0	8.5	13000	
550.0	1550.0	9.0	13000	
550.0	1550.0	9.5	14000	
550.0	1550.0	10.0	14000	

TABLE 5-4 (continued)

Page 2 of 19

Coord	inates	Depth	SPA-3 Count	Rate
East	North	(ft)	(cpm)	
550.0	1650.0	00	149000	
550.0	1650.0	0.5	324000	
550.0	1650.0	1.0	564000	
550.0	1650.0	1.5	613000	
550.0	1650.0	2.0	611000	
550.0	1650.0	2.5	300000	
550.0	1650.0	3.0	79000	
550.0 550.0	1650.0 1650.0	3.5 4.0	34000	
550.0 550.0	1650.0	4.5	21000 17000	•
550.0	1650.0	5.0	16000	
550.0	1650.0	5.5	15000	
550.0	1650.0	6.0	15000	
550.0	1650.0	6.5	15000	
550.0	1650.0	7.0	15000	
550.0	1650.0	7.5	14000	
550.0	1650.0	8.0	14000	
550.0	1650.0	8.5	14000	
550.0	1650.0	9.0	14000	
550.0	1650.0	9.5	14000	
550.0	1650.0	10.0	17000	
550.0	1750.0	0.0	118000	
550.0	1750.0	0.5	352000	
550.0	1750.0	1.0	523000	
550.0	1750.0	1.5	237000	
550.0	1750.0	2.0	97000	
550.0	1750.0	2.5	46000	
550.0	1750.0	3.0	28000	
550.0	1750.0	3.5 4.0	21000	
550.0	1750.0	4.5	18000	
550.0 550.0	1750.0 1750.0	5.0	16000 15000	
550.0	1750.0	5.5	15000	
550.0	1750.0	6.0	15000	
550.0	1750.0	6.5	15000	
550.0	1750.0	7.0	15000	
550.0	1750.0	7.5	15000	
550.0	1750.0	8.0	14000	
550.0	1750.0	8.5	14000	
550.0	1750.0	9.0	14000	
550.0	1750.0	9.5	13000	

TABLE 5-4 (continued)

	Pag	e	3.	οf	19
--	-----	---	----	----	----

	inates	Depth	SPA-3 Count Rate
East	North	(ft)	(cbw)
550.0	1750.0	10.0	15000
550.0	1850.0 1850.0	0.0 0.5	B2000
550.0 550.0	1850.0	1.0	47 000 28 000
550.0	1850.0	1.5	21000
550.0	1850.0	2.0	18000
550.0	1850.0	2.5	16000
550.0	1850.0	3.0	16000
550.0	1850.0	3.5	15000
550.0	1850.0	4.0	14000
550.0	1850.0 1850.0	4.5 5.0	14000
550.0 550.0	1850.0	5.5	14000 14000
550.0	1850.0	6.0	14000
550.0	1850.0	6.5	14000
550.0	1850.0	7.0	14000
550.0	1850.0	7.5	14000
550.0	1850.0	B . 0	14000
550.0	1850.0	B • 5	14000
550.0	1850.0	9.0	14000
550.0 550.0	1850.0 1850.0	9.5 10.0	14000 13000
573.0	1550.0	0.0	48000
573.0	1550.0	0.5	33000
573.0 573.0	1550.0 1550.0	1.0 1.5	20000
573.0	1550.0	2.0	17000 16000
573.0	1550.0	2.5	15000
573.0	1550.0	3.0	15000
573.0	1550.0	3.5	15000
573.0	1550.0	4.0	15000
573.0	1550.0	4.5	15000
573.0	1550.0	5.0	15000
573.0	1550.0	5.5	15000
573.0	1550.0 1550.0	6.0 6.5	14000
573.0 573.0	1550.0	7.0	14000 14000
573.0	1550.0	7.5	13000
573.0	1550.0	8.0	13000
573.0	1550.0	8.5	13000
573.0	1550.0	9.0	13000

TABLE 5-4 (continued)

Page 4 of 19

Coord East	inates North	Depth (ft)	SPA-3 Count (cpm)	Rate
573.0 573.0	1550.0 1550.0	9.5 10.0	14000 16000	
576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0 576.0	1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0 1650.0	0.0 0.5 1.0 1.5 2.5 3.5 4.5 5.0 5.0 7.5 8.5 9.5	100000 164000 244000 333000 400000 190000 26000 20000 16000 15000 15000 15000 14000 14000 14000 14000 14000	
576.0 588.0 589.0 59	1650.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0 1450.0	10.0 0.0 0.5 1.0 1.5 2.0 2.5 3.5 4.0 4.5 5.0 5.5 6.0 7.5 8.0 8.5	14000 152000 324000 173000 61000 19000 17000 16000 15000 15000 14000 14000 13000 13000	

TABLE 5-4 (continued)

Page 5 of 19

	Coordinates		SPA-3 Count Rat
East	North	(ft)	(cpm)
588.0	1450.0	9.0	13000
588.0	1450.0	9.5	13000
588.0	1450.0	10.0	14000
600.0	1700.0	0.0	93000
600.0	1700.0	0.5	177000
600.0	1700.0	1.0	174000
600.0	1700.0	1.5	142000
600.0	1700.0	2.0	104000
600.0	1700.0	2.5	38000
600.0	1700.0	3.0	20000
600.0	1700.0	3.5	17000
600.0	1700.0	4.0	15000
600.0	1700.0	4.5	15000
600.0	1700.0	5.0	15000
600.0	1700.0	5.5	15000
600.0	1700.0	6.0	15000
600.0	1700.0	6.5	15000
600.0	1700.0	7.0	14000
600.0	1700.0	7.5	14000
600.0	1700.0	8.0	13000
600.0	1700.0	8.5	13000
600.0	1700.0	9.0	13000
600.0 600.0	1700.0 1700.0	9.5 10.0	14000 14000
600.0	1850.0	0.0	58000
600.0	1850.0	0.5	89000
600.0	1850.0	1.0	246000
600.0	1850.0	1.5	411000
600.0	1850.0	2.0	212000
600.0	1850.0	2.5	64000
600.0	1850.0	3.0	29000
600.0	1850.0	3.5	19000
600.0	1850.0	4.0	17000
600.0	1850.0	4.5	16000
600.0	1850.0	5.0	15000
600.0	1850.0	5.5	15000
600.0	1850.0	6.0	15000
600.0	1850.0	6.5	14000
600.0	1850.0	7.0	14000
600.0	1850.0	7.5	14000
600.0	1850.0	8.0	14000

TABLE 5-4 (continued)

Page 6 of 19

Coordinates Depth SPA-3 Count Ra				
East	North	Depth (ft)	SPA-3 Count (cpm)	Rate
600.0 600.0 600.0	1850.0 1850.0 1850.0 1850.0	8.5 9.0 9.5 10.0	13000 13000 14000 14000	
600.0 600.0 600.0 600.0 600.0 600.0 600.0 600.0 600.0 600.0	1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0 1925.0	0.0 0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 5.5 6.0 7.5	23000 27000 46000 121000 359000 428000 251000 81000 32000 20000 17000 16000 16000 15000 14000	
600.0 600.0 600.0 600.0	1925.0 1925.0 1925.0 1925.0 1925.0	8.0 8.5 9.0 9.5 10.0	13000 13000 13000 13000 14000	
605.0 605.0 605.0 605.0 605.0 605.0 605.0 605.0 605.0 605.0	1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0 1400.0	0.0 0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 6.5 7.0	28000 48000 62000 26000 17000 15000 15000 15000 14000 14000 13000 13000	

TABLE 5-4 (continued)

19

	. 		
Coordi	natos	Depth	SPA-3 Count Rate
East	North	(ft)	(cbw)
COE	1400.0	8.0	13000
605.0			
605.0	1400.0	8.5	13000
605.0	1400.0	9.0	13000
605.0	1400.0	9.5	13000
605.0	1400.0	10.0	14000
695.0	1350.0	0.0	26000
695.0	1350.0	0.5	64000
695.0	1350.0	1.0	44000
695.0	1350.0	1.5	23000
		2.0	18000
695.0	1350.0		
695.0	1350.0	2.5	17000
695.0	1350.0	3.0	16000
695.0	1350.0	3.5	16000
695.0	1350.0	4 - 0	16000
695.0	1350.0	4.5	14000
695.0	1350.0	5.0	14000
695.0	1350.0	5.5	14000
695.0	1350.0	6.0	13000
695.0	1350.0	6.5	14000
695.0	1350.0	7.0	14000
695.0	1350.0	7.5	14000
695.0	1350.0	8.0	14000
695.0	1350.0	8.5	14000
695.0	1350.0	9.0	13000
	1350.0	9.5	14000
695.0		10.0	
695.0	1350.0	10.0	13000
700.0	1700.0	0.0	43000
700.0	1700.0	0.5	74000
700.0	1700.0	1.0	99000
700.0	1700.0	1.5	89000
700.0	1700.0	2.0	70000
700.0	1700.0	2.5	39000
700.0	1700.0	3.0	22000
700.0	1700.0	3.5	17000
	1700.0	4.0	16000
700.0		4.5	16000
700.0	1700.0		
700.0	1700.0	5.0	15000
700.0	1700.0	5.5	15000
700.0	1700.0	6.0	15000
700.0	1700.0	6.5	15000
700.0	1700.0	7.0	14000

TABLE 5-4 (continued)

Page	ВО	f 19
------	----	------

<u>Coord</u>	inates	Depth	SPA-3 Count Rate (cpm)
East	North	(ft)	
700.0	1700.0	7.5	13000
700.0	1700.0	8.0	14000
700.0	1700.0	8.5	13000
700.0	1700.0	9.0	13000
700.0	1700.0	9.5	14000
700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0	1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0 1823.0	0.0 1.5 1.5 2.5 3.5 4.5 5.0 5.5 6.5 7.5 8.5 9.0	21000 37000 50000 25000 18000 16000 15000 15000 15000 14000 14000 14000 14000 14000 14000 14000 13000
700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0 700.0	1823.0 1823.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0 1900.0	9.5 10.0 0.5 1.0 1.5 2.0 2.5 3.5 4.0 5.5 6.0 6.5	13000 13000 14000 25000 25000 19000 17000 16000 16000 15000 15000 15000 15000 14000

TABLE 5-4 (continued)

Page	9	of	19
------	---	----	----

Coord:	inates North	Depth (ft)	SPA-3 Count (cpm)	Rate
700.0	1900.0	7.0	12000	
700.0	1900.0	7.5	12000	
700.0	1900.0	8.0	13000	
700.0	1900.0	8.5	13000	
700.0	1900.0	9.0	13000	
700.0 700.0 737.5	1900.0 1900.0	9.5 10.0 0.0	13000 14000 20000	
737.5	1300.0	0.5	26000	
737.5	1300.0	1.0	27000	
737.5	1300.0	1.5	28000	
737.5	1300.0	2.0	19000	
737.5	1300.0	2.5	17000	
737.5	1300.0	3.0	16000	
737.5	1300.0	3.5	16000	
737.5	1300.0	4.0	15000	
737.5	1300.0	4.5	15000	
737.5	1300.0	5.0	14000	
737.5	1300.0	5.5	14000	
737.5	1300.0	6.0	14000	
737.5	1300.0	6.5	14000	
737.5	1300.0	7.0	14000	
737.5	1300.0	7.5	14000	
737.5	1300.0	8.0	14000	
737.5	1300.0	8.5	13000	
737.5	1300.0	9.0	13000	
737.5	1300.0	9.5	13000	
737.5	1300.0	10.0	14000	
750.0	1050.0	0.0	71000	
750.0	1050.0	0.5	117000	
750.0 750.0 750.0 750.0 750.0 750.0	1050.0 1050.0 1050.0 1050.0 1050.0	1.0 1.5 2.0 2.5 3.0	102000 57000 40000 30000 20000 17000	
750.0	1050.0	4.0	16000	
750.0	1050.0	4.5	16000	
750.0	1050.0	5.0	15000	
750.0	1050.0	5.5	15000	
750.0	1050.0	6.0	14000	

TABLE 5-4 (continued)

Page	10	of	19
------	----	----	----

<u>Coord</u> East	inates North	Depth (ft)	SPA-3 Count Rate (cpm)
750.0	1050.0	6.5	14000
750.0 750.0	1050.0 1050.0	7.0 7.5	14000
750.0	1050.0	8.0	14000 14000
750.0	1050.0	8.5	14000
750.0	1050.0	9.0	14000
750.0	1050.0	9.5	14000
750.0	1050.0	10.0	15000
750.0	1100.0	0.0	55000
750.0	1100.0	0.5	81000
750.0	1100.0	1.0	61000
750.0	1100.0	1.5	29000
750.0	1100.0	2.0	20000
750.0	1100.0	2.5	17000
750.0	1100.0	3.0	16000
750.0	1100.0	3.5	16000
750.0	1100.0 1100.0	4.0	16000
750.0	1100.0	4.5 5.0	16000 15000
750.0 750.0	1100.0	5.5	15000
750.0	1100.0	6.0	14000
750.0	1100.0	6.5	14000
750.0	1100.0	7.0	14000
750.0	1100.0	7.5	14000
750.0	1100.0	8.0	13000
750.0	1100.0	8.5	13000
750.0	1100.0	9.0	13000
750.0	1100.0	9.5	13000
750.0	1100.0	10.0	13000
797.0	1653.0	0.0	24000
797.0	1653.0	0.5	34000
797.0	1653.0	1.0	55000
797.0	1653.0	1.5	106000
797.0	1653.0	2.0	230000
797.0	1653.0	2.5	166000
797.0	1653.0	3.0	45000
797.0	1653.0 1653.0	3.5 4.0	23000
797.0 797.0	1653.0	4.0	`20000 16000
797.0	1653.0	5.0	
	1653.0		16000
797.0	1022.0	5.5	15000 ·

TABLE 5-4 (continued)

Page :	11 (of	19
--------	------	----	----

Page 11	01 13		
Coord East	inates North	Depth (ft)	SPA-3 Count Rate (cpm)
797.0 797.0 797.0 797.0 797.0 797.0 797.0 797.0	1653.0 1653.0 1653.0 1653.0 1653.0 1653.0 1653.0	6.0 6.5 7.0 7.5 8.0 8.5 9.0 9.5	15000 15000 15000 15000 15000 15000 15000 14000
800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0	1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0 1250.0	0.0 0.5 1.0 1.5 2.0 2.5 3.5 4.0 4.5 5.0 5.5 6.0 7.5 8.0 9.5 10.0	16000 29000 30000 18000 17000 16000 15000 15000 14000 14000 14000 14000 14000 14000 14000 14000 14000
800.0 800.0 800.0 800.0 800.0 800.0 800.0 800.0	1350.0 1350.0 1350.0 1350.0 1350.0 1350.0 1350.0 1350.0 1350.0	0.0 0.5 1.0 1.5 2.0 2.5 3.0 4.0 4.5	21000 30000 33000 28000 19000 17000 16000 16000 16000

TABLE 5-4 (continued)

P	a	ge	12	of	19

Coord	inates	Depth	SPA-3 Count Rate
East	North	(ft)	(cbw)
800.0	1350.0	5.5	15000
800.0	1350.0	6.0	15000
800.0	1350.0	6.5	14000
800.0	1350.0	7.0	14000
800.0	1350.0	7.5	15000
800.0	1350.0	8.0	15000
800.0	1350.0	8.5	14000
800.0	1350.0	9. 0	14000
800.0	1350.0	9.5	14000
800.0	1350.0	10.0	15000
800.0	1750.0	0.0	16000
800.0	1750.0	0.5	21000
800.0	1750.0	1.0	23000
800.0	1750.0	1.5	22000
800.0	1750.0	2.0	19000
800.0	1750.0	2.5	17000
800.0	1750.0	3.0	19000
800.0	1750.0	3.5	21000
800.0	1750.0	4.0	21000
800.0	1750.0	4.5	17000
800.0	1750.0	5.0	14000
800.0	1750.0	5.5	14000
800.0	1750.0	6.0	15000
800.0	1750.0	6.5 7.0	15000
800.0	1750.0	7.0	14000
800.0	1750.0	8.0	14000
800.0	1750.0	8.5	14000
800.0	1750.0	9.0	13000
800.0	1750.0 1750.0	9.5	13000 13000
800.0 800.0	1750.0	10.0	13000
804.0	1839.0	0.0	48000
804.0	1839.0	0.5	105000
804.0	1839.0	1.0	147000
804.0	1839.0	1.5	223000
804.0	1839.0	2.0	100000
804.0	1839.0	2.5	42000
804.0	1839.0	3.0	28000
804.0	1839.0	3.5	22000
804.0	1839.0	4.0	18000
804.0	1839.0	4.5	16000

TABLE 5-4 (continued)

Page 13 of 19

Coord	inates	Depth	h SPA-3 Count		Rate
East	North	(ft)		(cpm)	,
804.0	1839.0	5.0		15000	
804.0	1839.0	5.5		15000	
804.0	1839.0	6.0	•	14000	
804.0	1839.0	6.5		13000	
804.0	1839.0	7.0		12000	
804.0	1839.0	7.5		12000	
804.0	1839.0	8.0 8.5		12000	
804.0	1839.0			12000	
804.0	1839.0	9.0		10000	
804.0	1839.0	9.5		10000	
804.0	1839.0	10.0		13000	
805.0	1450.0	0.0		28000	
805.0	1450.0	0.5		37000	
805.0	1450.0	1.0		29000	
805.0	1450.0	1.5		19000	
805.0	1450.0	2.0		17000	
805.0	1450.0	2.5		16000	
805.0	1450.0	3.0		18000	
805.0	1450.0 1450.0	3.5 4.0		16000	
805.0 805.0	1450.0	4.5		15000 15000	
805.0	1450.0	5.0		15000	
805.0	1450.0	5.5		15000	
805.0	1450.0	6.0		15000	
805.0	1450.0	6.5		14000	
805.0	1450.0	7.0		14000	
805.0	1450.0	7.5		14000	
805.0	1450.0	8.0		15000	
805.0	1450.0	8.5		14000	
805.0	1450.0	9.0		14000	
805.0	1450.0	9.5		14000	
805.0	1450.0	10.0		14000	
806.0	1150.0	0.0		44000	
806.0	1150.0	0.5		43000	
806.0	1150.0	1.0	•	21000	
806.0	1150.0	1.5		17000	
806.0	1150.0	2.0		16000	
806.0	1150.0	2.5		16000	
806.0	1150.0	3.0		16000	
806.0	1150.0	3.5		15000	
806.0	1150.0	4.0		15000	
		-			

TABLE 5-4 (continued)

Page	14	of	19

<u>Coord</u> East	inates North	Depth (ft)	SPA-3 Co	ount	Rate
806.0 806.0 806.0 806.0 806.0 806.0 806.0 806.0 806.0	1150.0 1150.0 1150.0 1150.0 1150.0 1150.0 1150.0 1150.0 1150.0 1150.0	4.5 5.0 5.5 6.0 6.5 7.0 7.5 8.0 8.5 9.0 9.5	14 14 14 14 14 13 13	1000 1000 1000 1000 1000 1000 1000 100	
807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0 807.0	1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0 1550.0	0.5 0.5 1.5 2.5 2.5 3.5 4.5 5.0 5.0 5.0 5.0 7.5 8.5 9.5	26 32 27 28 22 17 16 15 15 15 14 14	3000 3000 3000 3000 3000 3000 3000 300	
807.0 852.0 852.0 852.0 852.0 852.0 852.0 852.0	1550.0 1062.5 1062.5 1062.5 1062.5 1062.5 1062.5 1062.5	10.0 0.0 0.5 1.0 1.5 2.0 2.5 3.0 3.5	12 14 17 16 15 15	2000 2000 2000 2000 5000 5000 5000	· ·

TABLE 5-4 (continued)

Pa	qe	15	of	19

Coord	inates	Depth	SPA-3 Count Rate
East	North	(ft)	(cpm)
852.0	1062.5	4.0	15000
852.0	1062.5		15000
852.0	1062.5	5.0	15000
852.0	1062.5	5.5	15000
852.0	1062.5	6.0	14000
852.0 852.0	1062.5 1062.5	6.5 7.0	14000 14000 15000
852.0	1062.5	7.5	14000
852.0	1062.5	8.0	14000
852.0	1062.5	8.5	14000
852.0	1062.5	9.0	14000
852.0	1062.5	9.5	14000
852.0	1062.5	10.0	14000
859.0	1500.0	0.0	24000
859.0	1500.0	0.5	20000
859.0	1500.0	1.0	17000
859.0	1500.0	1.5	16000
859.0	1500.0		16000
859.0	1500.0	2.5	16000
859.0	1500.0	3.0	18000
859.0	1500.0	3.5	16000
859.0	1500.0	4.0	16000
859.0	1500.0	4.5	15000
859.0	1500.0	5.0	15000
859.0	1500.0	5.5	15000
859.0	1500.0	6.0	15000
859.0	1500.0	6.5	14000
859.0	1500.0	7.0	14000
859.0	1500.0	7.5	14000
859.0	1500.0	8.0	14000
859.0	1500.0	8.5	14000
859.0	1500.0	9.0	14000
8 59.0	1500.0	9.5	14000
859.0	1500.0	10.0	14000
860.0		0.0	34000
860.0	1400.0	0.5	20000
860.0	1400.0	1.0	16000
860.0	1400.0	1.5	16000
860.0	1400.0	2.0	16000
860.0	1400.0	2.5	16000
860.0	1400.0	3.0	16000

TABLE 5-4 (continued)

Page 16 of 19

Coordi		Depth	SPA-3 Count Rate
East	North	(ft)	(cpm)
860.0	1400.0	3.5	16000
860.0	1400.0	4.0	16000
860.0	1400.0	4.5	15000
860.0	1400.0	5.0	15000
860.0	1400.0	5.5	15000
860.0	1400.0	6.0	15000
860.0	1400.0	6.5	15000
860.0	1400.0	7.0	15000
860.0	1400.0	7.5	15000
860.0	1400.0	8.0	15000
860.0	1400.0	8.5	14000
860.0	1400.0	9.0	15000
			•
861.0	1600.0	0.0	116000
861.0	1600.0	0.5	449000
861.0	1600.0	1.0	354000
861.0	1600.0	1.5	95000
861.0	1600.0	2.0	40000
861.0	1600.0	25	25000
861.0	1600.0	3.0	20000
861.0	1600.0	3.5	18000
861.0	1600.0	4.0	17000
861.0	1600.0	4.5	17000
861.0	1600.0	5.0	16000
861.0	1600.0	5.5	16000
861.0	1600.0	6.0	16000
861.0	1600.0	6.5	16000
861.0	1600.0	7.0	16000
861.0	1600.0	7.5	16000
861.0	1600.0	8.0	16000
861.0	1600.0	8.5	16000
861.0	1600.0	9.0	15000
861.0	1600.0	9.5	16000
861.0	1600.0	10.0	15000
862.0	1700.0	0.0	33000
	1700.0	0.5	29000
862.0 862.0	1700.0	1.0	20000
862.0	1700.0	1.5	17000
862.0	1700.0	2.0	17000
862.0	1700.0	2.5	16000
862.0	1700.0	3.0	16000
862.0	1700.0	3.5	15000
002.0	1,00.0	ر ، ر	15000

TABLE 5-4 (continued)

Page	17	of	1:	9
------	----	----	----	---

Page 17	01 19		<u> </u>
<u>Coord</u> East	inates North	Depth (ft)	SPA-3 Count Rate (cpm)
862.0 862.0 862.0 862.0 862.0 862.0 862.0	1700.0 1700.0 1700.0 1700.0 1700.0 1700.0 1700.0	4.0 4.5 5.0 5.5 6.0 6.5 7.0 7.5	14000 14000 14000 14000 15000 14000 14000
862.0 862.0 862.0 862.0 862.0	1700.0 1700.0 1700.0 1700.0 1700.0	8.0 8.5 9.0 9.5 10.0	14000 14000 14000 14000 13000
862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0 862.0	1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0 1800.0	0.5 1.0 1.5 2.0 2.5 3.0 4.5 5.0 6.5 7.5 8.0 9.0	19000 34000 73000 95000 56000 24000 19000 17000 16000 15000 15000 14000 12000 12000 12000
862.0 862.0 870.0 870.0 870.0 870.0 870.0	1800.0 1800.0 1106.0 1106.0 1106.0 1106.0 1106.0	9.5 10.0 0.0 0.5 1.0 1.5 2.0 2.5 3.0	12000 13000 10000 12000 14000 14000 15000 15000

TABLE 5-4 (continued)

Page	18	οf	19
------	----	----	----

Coord	linates	Depth	SPA-3 Count Rate
East	North	(ft)	(cpm)
870.0	1106.0	3.5	15000
870.0	1106.0	4.0	14000
870.0	1106.0	4.5	15000
870.0	1106.0	5.0	15000
870.0	1106.0	5.5	15000
870.0	1106.0	6.0	13000
870.0	1106.0	6.5	13000
870.0	1106.0	7.0	13000
870.0	1106.0	7.5	13000
870.0	1106.0	8.0	13000
870.0	1106.0	8.5	13000
870.0	1106.0	9.0	13000
870.0	1106.0	9.5	14000
870.0	1106.0	10.0	14000
870.0	1200.0	0.0	22000
870.0	1200.0	0.5	52000
870.0	1200.0	1.0	53000
870.0	1200.0	1.5	47000
870.0	1200.0	2.0	42000
870.0	1200.0	2.5	27000
870.0	1200.0	3.0	19000
870.0	1200.0	3.5	17000
870.0	1200.0	4.0	17000
870.0	1200.0	4.5	16000
870.0	1200.0	5.0	16000
870.0	1200.0	5.5	17000
870.0	1200.0	6.0	16000
870.0	1200.0	6.5	16000
870.0	1200.0	7.0	16000
870.0	1200.0	7.5	16000
870.0	1200.0	8.0	16000
870.0	1200.0	8.5	15000
870.0	1200.0	9.0	15000
870.0	1200.0	9.5	15000
870.0	1200.0	10.0	15000
872.0	1300.0	0.υ	12000
	1300.0	0.5	14000
872.0	1300.0	1.0	15000
872.0	1300.0	1.5	15000
872.0	1300.0	2.0	15000
872.0	1300.0	2.5	16000

TABLE 5-4 (continued)

Page 19 of 19

			•
Coord	inates	Depth	SPA-3 Count Rate
East	North	(ft)	(cpm)
872.0	1300.0	3.0	16000
872.0			
	1300.0	3.5	16000
872.0	1300.0	4 .0	15000
872.0	1300.0	4.5	15000
872.0	1300.0	5.0	15000
872.0	1300.0	5.5	16000
872.0	1300.0	6.0	16000
872.0	1300.0	6.5	16000
872.0	1300.0	7.0	15000
872.0	1300.0	7.5	16000
872.0	1300.0	8.0	16000
872.0	1300.0	8.5	15000
872.0	1300.0	9.0	15000
872.0	1300.0	9.5	15000
872.0	1300.0	10.0	15000

Page 1 of 15

• •	Concentration $(pCi/g +/- 2 sigma)$				Depth	inates	Coord	
Thorium-23		Thorium		Radium-22	Uranium-238	(ft)	North	East
-a-	1.2	2.4 +/-	2.0	26.0 +/-	32.0 +/- 10.0	0- 1	1450.0	550.0
-a-		< 1.0		12.0 +/-	23.0 +/- 6.0	1- 2	1450.0	550.0
-a-	1.1	2.3 + / -		15.0 +/-	<18.0	2- 3	1450.0	550.0
2.0 +/- 0.	1.0	3.0 +/-	0.5	0.8 +/-	< 9.0	3- 4	1450.0	550.0
7.0 + / - 1.	0.7	1.8 +/-	0.5	1.4 +/-	< 4.0	4- 5	1450.0	550.0
-a-	1.0	3.0 +/-	0.6	2.0 +/-	< 9.0	5- 6	1450.0	550.0
-a-	0.8	1.5 +/-	0.4	0.9 + / -	< 6.0	6-7	1450.0	550.0
-a-	0.7	1.1 + / -	0.6	1.0 + / -	< 5.0	7- B	1450.0	550.0
-a-	0.7	1.3 +/-	0.5	1.1 +/-	< 8.0	8- 9	1450.0	550.0
-a-	1.0	3.0 +/-	0.6	2.1 +/-	< 9.0	9-10	1450.0	550.0
-a-		< 3.0	5.0	37.0 +/-	36.0 +/- 29.0	0- i	1550.0	550.0
-b-		- b-		-b-	-b-	1- 2	1550.0	550.0
-a-		< 2.0	3.0	44.0 +/-	51.0 +/- 14.0	2- 3	1550.0	550.0
-a-	1.0	5.0 +/-	1.0	3.0 +/-	<11.0	3- 4	1550.0	550.0
4.5 + / - 0.	0.7	0.7 + / -	0.6	≟.6 +/-	< 7.0	4- 5	1550.0	550.0
160.0 +/- 20.	1.0	3.0 +/-	1.0	10.0 +/-	15.0 +/- 5.0	5- 6	1550.0	550.0
1.3 +/- 0.	0.8	1.5 +/-	0.5	1.4 +/-	< 4.0	67	1550.0	550.0
0.8 +/- 0.	0.8	1.9 +/-		1.8 +/-	< 8.0	7- 8	1550.0	550.0
-a-	0.6	1.2 +/-	0.4	1.7 +/-	< 5.0.	8- 9	1550.0	550.0
-a-	0.8	1.1 +/-	0.5	0.9 +/-	< 5.0	9-10	1550.0	550.0
-a-	1.0	2.0 +/-	2.0	32.0 +/-	43.0 +/- 16.0	0- 1	1550.0	550.0
-a-		< 4.0	10.0	310.0 +/-	450.0 +/- 40.0	1- 2	1650.0	550.0
14.0 +/- 1.	1.0	2.0 +/-	0.6	1.5 +/-	<10.0	2- 3	1650.0	550.0

Page 2 of 15

,			_	_		
		centration (pCi/c		Depth	<u>inates</u>	Coord
Thorium-230	Thorium-232	Radium-226	Uranium-238	(ft)	North	East
7.1 +/- 0.7	2.0 +/- 1.0	< 1.0	< 4.0	3- 4	1650.0	550.0
3.5 + / - 0.4	2.0 +/- 1.0	1.5 + / - 0.4	<15.0	4- 5	1650.0	550.0
-a-	2.0 +/- 1.0	1.6 +/- 0.6	< 8.0	5- 6	1650.0	550.0
-a-	3.0 +/- 1.0	1.6 +/- 0.6	<10.0	6- 7	1650.0	550.0
-a-	< 1.0	1.2 +/- 0.5	< 5.0	7- 8	1650.0	550.0
-a-	$1.0^{-+/-}$ 0.7	0.8 +/- 0.5	< 5.0	8- 9	1650.0	550.0
-a-	1.6 +/- 0.7	1.1 +/- 0.4	< 9.0	9-10	1650.0	550.0
-a-	< 4.0	700.0 +/-100.0	800.0 +/-100.0	0- 1	1750.0	550.0
730.0 +/- 10.0	2.0 +/- 1.0	11.0 +/- 2.0	11.0 +/- 7.0	1- 2	1750.0	550.0
9.0 +/- 1.0	3.0 + / - 1.0	2.1 +/- 0.6	<10.0	2- 3	1750.0	550.0
2.1 +/- 0.5	0.9 +/- 0.7	1.4 +/- 0.6	< 8.0	3- 4	1750.0	550.0
4.9 +/- 1.0	1.9 +/- 0.8	1.7 + / - 0.5	< 6.0	4-5	1750.0	550.0
-a-	2.0 +/- 1.0	2.0 +/- 0.6	< 9.0	5- 6	1750.0	550.0
-a-	< 1.0	0.8 +/- 0.5	< 7.0	6- 7	1750.0	550.0
-a-	1.4 + / - 0.7	1.1 + / - 0.6	< 8.0	7-8	1750.0	550.0
-a-	0.9 +/- 0.7	0.8 +/- 0.5	< 6.0	8- 9	1750.0	550.0
-a-	4.0 +/- 1.0	5.0 +/- 1.0	12.0 +/- 5.0	0- 1	1850.0	550.0
1.8 +/- 0.7	1.5 +/- 0.8	1.4 +/- 0.5	< 7.0	1- 2	1850.0	550.0
1.4 +/- 0.4	2.0 + / - 1.0	2.1 + / - 0.7	< 7.0	2- 3	1850.0	550.0
1.7 +/- 0.5	1.7 +/- 0.9	1.5 +/- 0.5	<10.0	3-4	1850.0	550.0
3.2 +/- 0.6	1.8 +/- 0.9	1.8 +/- 0.6	< 9.0	4-5	1850.0	550.0
-a-	1.6 +/- 0.8	1.6 +/- 0.5	< 6.0	5- 6	1850.0	550.0
-a-	2.2 +/- 0.8	1.3 +/- 0.5	< 8.0	6- 7	1850.0	550.0
		•				

TABLE 5-5 (continued)

Pа	пe	3	of	15
ı u	ue		~	

• •	igma)	+/- 2 si	ration (pCi/c	Con	Depth	inates	Coord
Thorium-230	n-232	Thorium	dium-226	Uranium-238	(ft)	North	East
-a-	•	< 1.0	.5 +/- 0.4	< 8.0	7- 8	1850.0	550.0
-a-	0.9	2.1 +/-	.7 +/- 0.7	< 9.0	8- 9	1850.0	550.0
-a-	1.0	2.0 +/-	0 +/- 2.0	30.0 +/- 6.0	0- 1	1550.0	573.0
2.6 +/- 0.5	0.8	1.2 +/-	.2 +/- 0.5	< 7.0	1- 2	1550.0	573.0
1.7 +/- 0.8	0.7	1.3 +/-	.7 +/- 0.6	< 6.0	2- 3	1550.0	573.0
3.6 + /- 2.2	1.0	3.0 +/-	.0 +/- 0.6	< 8.0	3- 4	1550.0	573.0
2.9 + / - 1.4	0.8	1.7 +/-	.5 +/- 0.6	< 6.0	4-5	1550.0	573.0
-a-	0.8	2.2 +/-	.5 +/- 0.6	< 5.0	5- 6	1550.0	573.0
-a-	0.6	1.1 +/-	.2 +/- 0.4	< 8.0	6- 7	1550.0	573.0
-a-	0.7	1.2 +/-	.7 +/- 0.5	< 6.0	7- 8	1550.0	573.0
-a-	0.9	2.1 +/-	.4 +/- 0.5	< 8.0	8- 9	1550.0	573.0
-a-	1.0	2.0 +/-	.0 +/- 1.0	< 8.0	9-10	1550.0	573.0
-a-	1.0	3:0 +/-	.0 +/- 2.0	36.0 +/- 9.0	0- 1	1650.0	576.0
-a-		< 1.0	.0 +/- 2.0	29.0 +/- 5.0	1- 2	1650.0	576.0
-a-	2.0	4.0 +/-	.0 +/- 10.0	210.0 +/- 20.0	2- 3	1650.0	576.0
4.7 + / - 0.6	0.8	1.7 +/-	.7 +/- 0.6	< 5.0	3- 4	1650.0	576.0
3.4 + / - 0.7	0.8	1.9 +/-	.C +/- 0.5	< 8.0	4-5	1650.0	576.0
-a-		< 1.0	.0 +/- 0.6	< 6.0	5- 6	1650.0	576.0
-a-	0.7	1.0 +/-	.4 +/- 0.5	< 9.0	6- 7	1650.0	576.0
-a-	0.8	1.1 +/-	.8 +/- 0.6	< 4.0	7- 8	1650.0	576.0
-a-	0.9	1.8 +/-	.3 +/- 0.5	<10.0	8- 9	1650.0	576.0
-a-	0.7	1.0 +/-	.6 +/- 0.4	< 6.0	9-10	1650.0	576.0
-a-	2.0	4.0 +/-	.0 +/- 10.0	100.0 +/- 20.0	0- 1	1450.0	588.0

					centration		Depth	linates		
n-230	Thorium-23		-232	Thorium-232		Radium-22	Uranium-238	(ft)	North	East
2.0) +/-	20.0	0.9	2.5 +/-	0.6	1.1 +/-	< 4.0	1- 2	1450.0	588.0
) +/-		1.0	3.0 +/-	0.5	1.6 +/-	<10.0	2- 3	1450.0	588.0
1.1	? +/-	2.2	0.7	1.6 +/-	0.6	1.5 +/-	<11.0	3- 4	1450.0	588.0
1.0) +/-	2.0	0.7	1.5 +/-	0.5	1.6 +/-	< 4.0	4-5	1450.0	588.0
	a-		0.7	0.9 +/-	0.5	1.5 +/-	< 6.0	5- 6	1450.0	588.0
	-a-		0.7	1.9 +/-	0.5	1.3 +/-	< 8.0	6- 7	1450.0	588.0
	-a-	•	0.6	0.7 +/-	0.5	0.8 +/-	< 3.0	7- B	1450.0	588.0
	-a-		0.6	1.5 +/-	0.5	1.4 +/-	< 8.0	8- 3	1450.0	588.0
	-a-		0.6	0.9 +/-	0.5	1.2 +/-	< 5.0	9-10	1450.0	588.0
	-a-		1.0	2.0 +/-	3.0	41.0 +/-	56.0 +/- 13.0	0- 1	1700.0	600.0
	-a-		0.7	1.1 +/-	1.0	5.0 +/ <i>-</i>	6.0 + / - 5.0	1- 2	1700.0	600.0
	5 +/-		0.7	1.2 +/-	0.6		< 6.0	2- 3	1700.0	600.0
	+/-		0.7	1.0 +/-	0.5	1.0 +/-	< 5.0	3- 4	1700.0	600.0
1.2	3 +/-	3.8	0.8	1.9 +/-	0.6	1.6 +/-	< 8.0	4-5	1700.0	600.0
	-a-		0.8	1.8 +/-	0.5	1.3 +/-	< 6.0	5- 6	1700.0	600.0
	-a-		1.0	3.0 +/-	0.6	0.8 +/-	<10.0	6- 7	1700.0	600.0
	-a-		0.7	1.3 +/-	0.5	1.7 +/-	< 7.0	78	1700.0	600.0
	-a-		0.7	1.6 +/-	0.6	1.9 +/-	< 8.0	8- 9	1700.0	600.0
	-a-	:	0.7	1.6 +/-	0.5	0.9 +/-	< 8.0	9-10	1700.0	600.0
	-a-		1.0	2.0 +/-	2.0	17.0 +/-	26.0 +/- 8.0	0- 1	1850.0	600.0
	-a-		3.0	5.0 +/-	20.0	220.0 +/-	130.0 +/- 40.0	1- 2	1850.0	600.0
0.7	5 +/-	4.6	0.8	1.4 +/-	0.6	1.9 +/-	< 8.0	2- 3	1850.0	600.0
	2 +/-		0.8	2.1 +/-	0.5	1.7 +/-	< 8.0	3- 4	1850.0	600.0

	*	gma)	Concentration (pCi/g +/- 2 sig				linates	Coord
-230	Thorium		Thorium	Radium-226	Uranium-238	Cepth (ft)	North	East
0.6	2.3 +/-	0.7	1.4 +/-	0.9 +/- 0.5	< 8.0	4- 5	1850.0	600.0
	-a-	0.8	1.4 +/-	2.8 + / - 0.7	< 8.0	5- 6	1850.0	600.0
	-a-	0.8	0.9 +/-	0.9 +/- 0.6	<10.0	6- 7	1850.0	600.0
	-a-		< 1.0	1.3 +/- 0.5	< 7.0	7-8	1850.0	600.0
	-a-	0.6	1.6 +/-	1.5 +/- 0.5	< 7.0	8- 9	1850.0	600.0
	-a-	1.0	4.0 +/-	3.0 +/- 0.8	< 8.0	9-10	1850.0	600.0
	-a-		< 1.0	39.0 +/- 3.0	28.0 +/- 14.0	0- 1	1925.0	600.0
	-a-		< 1.0	210.0 +/- 20.0	100.0 +/- 20.0	1- 2	1925.0	600.0
	-a-	2.0	2.0 +/-	120.0 +/- 10.0	47.0 +/- 16.0	2- 3	1925.0	600.0
0.5	3.7 +/-	0.9	1.3 + / -	1.6 + / - 0.7	< 8.0	3- 4	1925.0	600.0
0.5	2.7 +/-	1.0	3.0 +/-	1.5 +/- 0.6	<11.0	4- 5	1925.0	600.0
	-a-	0.7	1.6 + /-	0.8 +/- 0.5	< 7.0	5- 6	1925.0	600.0
	-a-	0.7	1.6 +/-	1.4 +/- 0.5	< 6.0	6- 7	1925.0	600.0
	-a-	0.6	1.6 +/-	1.4 +/- 0.5	< 8.0	7-8	1925.0	600.0
	, -a-	1.0	2.0 +/-	3.0 +/- 1.0	< 7.0	8- ô	1925.0	600.0
	-a-		< 2.0	15.0 +/- 3.0	31.0 +/- 13.0	1- 2	1400.0	605 .0
20.0	790.0 +/-	1.0	3.0 +/-	10.0 + / - 1.0	20.0 +/- 8.0	2- 3	1400.0	605.0
	-a-	0.8	1.9 +/-	3.8 + / - 0.8	< 9.0	3- 4	1400.0	605.0
1.3	3.5 +/-	1.0	2.0 +/-	2.9 +/- 0.7	<10.0	4-5	1400.0	605.0
	-a-	0.8	1.4 +/-	1.3 +/- 0.6	< 6.0	5- 6	1400.0	605.0
	-a-	0.7	1.5 +/-	2.1 +/- 0.6	< 7.0	6- 7	1400 0	605.0
	-a-	1.0	3.0 +/-	1.2 + / - 0.5	< 5.0	7-8	1400.0	605.0
	-a-	0.8	2.6 +/-	1.1 + / - 0.5	< 8.0	8- 9	1400.0	605.0

TABLE 5-5 (continued)

_	_	_	
Page		of	

Coord	dinates	Depth	Con	centration (pCi/	g +/- 2 sigma)	
East	North	(ft)	Uranium-238	Radium-226	Thorium-232	Thorium-230
695.0	1350.0	G- 1	6.0 +/- 6.0	6.0 +/- 1.0	< 1.0	-a-
695.0	1350.0	1- 2	10.0 +/- 8.0	14.0 +/- 2.0	1.3 +/- 1.0	-a-
695.0	1350.0	2- 3	< 6.0	0.7 + / - 0.6	1.1 +/- 0.9	3.5 + / - 1.0
695.0	1350.0	3- 4	< 5.0	1.6 +/- 0.5	< 1.0	-a-
695.0	1350.0	4- 5	< 5.0	2.0 +/- 0.6	2.1 +/- 0.8	1.2' +/- 0.6
695.0	1350.0	5- 6	< 8.0	1.8 +/- 0.5	2.0 +/- 0.7	-a-
695.0	1350.0	6- 7	< 5.0	1.7 + / - 0.5	1.9 + / - 0.8	-a-
695.0	1350.0	7- 8	< 5.0	1.1 +/- 0.5	1.5 +/- 0.8	-a-
695.0	1350.0	8- 9	< 9.0	1.2 +/- 0.5	2.8 +/- 0.9	-a-
700.0	1700.0	0- 1	18.0 +/- 7.0	12.0 +/- 2.0	< 1.0	-a-
700.0	1700.0	1- 2	<10.0	2.0 +/- 0.6	2.0 +/- 1.0	120.0 +/- 10.0
700.0	1700.0	2- 3	<10.0	4.0 +/- 1.0	4.0 +/- 1.0	-a-
700.0	1700.0	3- 4	< 6.0	1.7 +/- 0.6	1.6 +/- 0.9	1.6 +/- 0.4
700.0	1700.0	4-5	<10.0	1.5 +/- 0.6	1.7 + / - 0.8	5.3 +/- 0.9
700.0	1700.0	5- 6	< 8.0	1.5 +/- 0.6	1.2 +/- 0.7	-a-
700.0	1700.0	6- 7	< 8.0	1.1 + / - 0.5	1.2 +/- 1.0	-a-
700.0	1700.0	7− €	< 5.0	1.3 +/- 0.6	1.7 +/- 0.7	-a-
700.0	1700.0	8- 9	< 9.0	1.5 +/- 0.5	3.0 +/- 1.0	-a-
700.0	1823.0	0- 1	< 9.0	5.0 +/- 1.0	< 1.0	-a-
700.0	1823.0	1- 2	< 6.0	1.4 + / - 0.5	0.9 +/- 0.8	2.9 +/- 0.6
700.0	1923.0	2- 3	< 8.0	1.3 +/- 0.5	0.8 + / - 0.7	-a-
700.0	1823.0	3- 4	< 5.0	1.4 +/- 0.5	1.7 +/- 0.7	-a-

Page 7 of 15

	2 sigma)	i/g	Concentration (pCi/g +/- 2 sigm					Coord
Thorium-23	orium-232		adium-226	38	Uranium-2.	Depth (ft)	North	East
1.6 +/- 0.	+/- 0.9	5	1.0 +/-		< 9.0	4- 5	1823.0	700.0
1.3 +/- 0.	+/- 0.7		1.3 +/-		< 7.0	5- 6	1823.0	700.0
-a-	+/- 0.7	4	1.1 +/-		< 8.0	6- 7	1823.0	700.0
-a-	+/- 0.8		1.0 +/-		< 6.0	7-8	1823.0	700.0
-a-	+/- 0.6	5	1.4 +/-	•	< 7.0	8- 9	1823.0	700.0
-a-	+/- 1.0	5	0.5 +/-		< 8.0	9-10	1823.0	700.0
-a-	+/- 0.7	0	6.0 +/-		<11.0	0- 1	1900.0	700.0
1.9 +/- 1.	$\div/-$ 1.0	5	1.6 +/-		< 9.0	1- 2	1900.0	700.0
1.2 +/- 0.	+/- 0.7	5	0.6 +/-		< 7.0	2- 3	1900.0	700.0
1.8 +/- 0.	+/- 0.7	5	0.8 +/-		< 7.0	3- 4	1900.0	700.0
1.2 +/- 0.	+/- 1.0	5	1.3 +/-		< 9.0	4-5	1900.0	700.0
-a-	+/- 0.7	4	1.0 +/-		< 8.0	5- 6	1900.0	700.0
-a-	+/- 0.6	5	1.5 +/-		< 5.0	6- 7	1900.0	700.0
-a-	+/- 0.6	5	1.0 +/-	•	< 5.0	7-8	1900.0	700.0
-a-	+/- 0.7	5	1.7 +/-		< 7.0	8- 9	1900.0	700.0
-a-	1.0	0	5.0 +/-	6.0	9.0 +/-	0- 1	1300.0	737.5
-a-	+/- 1.0	7	2.6 +/-	4.0	7.0 +/-	1- 2	1300.0	737.5
1.9 +/- 0.	+/- 0.8	5	1.7 +/-		< 5.0	2- 3	1300.0	737.5
-a-	+/- 0.9	6	1.6 +/-	•	< 6.0	3- 4	1300.0	737.5
2.3 +/- 1.	+/- 0.6	5	1.1 +/-		< 4.0	4-5	1300.0	737.5
-a-	+/- 0.8	5	1.5 +/-		< 5.0	5- 6	1300. 0	737.5
-a-	+/- 0.7	5	1.0 +/-		< 7.0	6- 7	1300.0	737.5
-a-	+/- 0.7	5	1.5 +/-		< 4.0	7-8	1300.0	737.5

Coord	dinates	Depth		centration (pCi/				
East	North	(ft)	Uranium-238	Radium-226	Thorium-232	Thorium-23(
737.5	1300.0	8- 9	< 4.0	1.0 +/- 0.5	< 1.0	-a-		
750.0	1050.0	0- 1	24.0 +/- 6.0	19.0 +/- 2.0	2.0 +/- 1.0	-a-		
750.0	1050.0	1- 2	<17.0	9.0 +/- 1.0	< 1.0	190.0 +/- 10.0		
750.0	1050.0	2- 3	<10.0	4.0 +/- 1.0	1.5 + - 0.9	-a-		
750.0	1050.0	3- 4	<12.0	1.6 +/- 0.6	1.1 + / - 0.7	2.4 +/- 0.9		
750.0	1050.0	4-5	< 8.0	1.0 +/- 0.5	2.0 +/- 1.0	1.5 +/- 0.8		
750.0	1050.0	5- 6	<10.0	2.4 +/- 0.6	1.7 +/- 0.8	-a-		
750.0	1050.0	6- 7	< 6.0	0.8 +/- 0.4	0.9 +/- 0.6	-a-		
750.0	1050.0	7-8	< 7.0	1.1 + / - 0.5	1.4 +/- 0.7	-a-		
750.0	1050.0	8- 9	<15.0	1.5 +/- 0.7	3.0 +/- 2.0	-a-		
750.0	1100.0	0- 1	25.0 +/- 11.0	18.0 +/- 2.0	1.5 +/- 1.1	-a-		
750.0	1100.0	3- 4	< 9.0	1.4 +/- 0.5	1.8 +/- 0.9	5.6 +/- 1.2		
750.0	1100.0	4-5	< 7.0	1.2 +/- 0.5	0.8 + / - 0.7	2.9 +/- 1.3		
750.0	1100.0	5- 6	<10.0	1.8 +/- 0.5	1.8 +/- 0.9	-a-		
750.0	1100.0	6- 7	< 6.0	0.9 +/- 0.5	1.4 +/- 0.7	-a-		
750.0	1100.0	7-8	< 8.0	1.1 + / - 0.4	< 1.0	-a-		
750.0	1100.0	8- 9	< 7.0	1.5 +/- 0.5	< 1.0	-a-		
797.0	1653.0	0- 1	19.0 +/- 9.0	11.0 +/- 2.0	2.0 +/- 1.0	-a-		
797.0	1653.0	1- 2	34.0 +/- 12.0	44.0 +/- 3.0	2.0 +/- 2.0	-a-		
797.0	1653.0	2- 3.	<10.0	3.1 +/- 0.8	2.1 + / - 0.9	-a-		
797.0	1653.0	3- 4	< 5.0	1.2 + / - 0.5	1.3 + / - 0.9	1.6 +/- 0.3		
797.0	1653.0	4-5	<10.0	2.3 +/- 0.6	3.0 + / - 1.0	1.8 +/- 0.4		

	r +/- 2 sigma)	centration (pCi/g	Con	Depth	linates	Coord
Thorium-23	Thorium-232	Radium-226	Uranium-238	(ft)	North	East
-a-	1.6 +/- 0.7	1.1 +/- 0.5	< 4.0	5- 6	1653.0	797.0
-a-	3.0 +/- 1.0	1.3 +/- 0.4	< 7.0	6- 7	1653.0	797.0
-a-	< 1.0	0.7 +/- 0.4	< 4.0	7 - 8	1653.0	797.0
-a-	1.5 +/- 0.9	1.2 +/- 0.6	< 5.0	8- 9	1653.0	797.0
-a-	2.0 +/- 1.0	5.0 +/- 1.0	9.0 +/- 6.0	0-1.	1250.0	800.0
-a-	< 1.0	5.0 +/- 1.0	< 8.0	1- 2	1250.0	800.0
1.6 +/- 0.	1.2 +/- 0.8	1.5 +/- 0.6	< 8.0	2- 3	1250.0	800.0
-a-	< 1.0	1.2 +/- 0.6	< 5.0°	3- 4	1250.0	800.0
1.3 +/- 0.	2.7 + / - 0.9	2.1 +/- 0.6	< 9.0	4-5	1250.0	800.0
-a-	1.0 +/- 0.8	0.6 +/- 0.5	< 7.0	5- 6	1250.0	800.0
-a-	1.9 +/- 0.8	1.1 +/- 0.5	< 9.0	6- 7	1250.0	800.0
-a-	2.3 +/- 0.9	1.5 +/- 0.5	< 9.0	7-8	1250.0	800.0
-a-	1.3 + / - 0.7	1.4 +/- 0.5	< 4.0	8- 9	1250.0	800.0
-a-	1.0 +/- 0.7	1.1 +/- 0.6	< 4.0	9-10	1250.0	800.0
-a-	3.0 +/- 1.0	5.0 +/- 1.0	10.0 +/- 5.0	0- 1	1350.0	800.0
-a-	1.6 +/- 0.9	4.0 +/- 1.0	< 7.0	1- 2	1350.0	800.0
-a-	2.0 + / - 1.0	1.5 +/- 0.6	<13.0	2- 3	1350.0	800.0
1.3 +/- 0.	1.2 +/- 0.8	1.7 + / - 0.6	< 9.0	3- 4	1350.0	800.0
1.1 +/- 0.	1.5 +/- 0.8	1.2 +/- 0.6	< 6.0	4-5	1350.0	800.0
-a-	1.9 +/- 0.8	1.5 +/- 0.6	<10.0	5- 6	1350.0	800.0
-a-	1.5 + - 0.7	1.1 +/- 0.6	< 6.0	6- 7	1350.0	800.0
-a-	1.3 + / - 0.7	1.3 +/- 0.5	< 4.0	7-8	1350.0	800.0
-a-	4.0 +/- 1.0	2.3 +/- 0.8	<14.0	8- 9	1350.0	800.0

რ

TABLE 5-5 (continued)

Page	1.0	Ωf	15
raue	ΤV	OI	LJ

· · · · · · · · · · · · · · · · · · ·	gma)	y + /- 2 si	Concentration (pCi/g +/- 2 sigm				Depth	linates	Coord
Thorium-23		Thorium		Radium-22		Uranium-2	(ft)	North	East
					•		<u> </u>		
-a-	0.7	1.2 +/-	0.7	2.9 +/-		< 5.0	0- 1	1750.0	800.0
-a-	0.9	2.2 +/-	0.9	3.3 +/-		<10.0	1- 2	1750.0	800.0
-a-	0.7	0.9 +/-	0.5	1.2 +/-	-	< 5.0	2- 3	1750.0	800.0
62.0 + /- 2.	1.0	3.0 + /-	0.8	2.4 +/-		<10.0	3- 4	1750.0	800.0
2.3 +/- 0.	0.7	0.9 +/-	0.4	0.9 +/-		< 4.0	4- 5	1750.0	800.0
-a-	0.9	2.3 +/-	0.5	1.2 +/-		< 9.0	- 5- 6	1750.0	800.0
-a-	0.9	0.9 +/-	0.5	1.2 +/-		< 4.0	6- 7	1750.0	800.0
-a-	0.7	1.0 +/-	0.4	1.0 +/-		< 4.0	7- 8	1750.0	800.0
-a-	0.8	1.8 +/-	0.5	1.0 +/-		< 8.0	8- 9	1750.0	800.0
-a-	0.8	1.7 +/-	1.0	7.0 +/-		<19.0	0- 1	1839.0	804.0
_ a _	1.0	2.0 +/-	2.0	23.0 +/-	11.0	22.0 +/-	1- 2	1839.0	804.0
200.0 + / - 10.	0.9	1.4 + / -	1.0	7.0 +/-	7.0	15.0 +/-	2- 3	1839.0	804.0
10.0 +/- 1.	0.8	1.8 +/-	0.5	1.5 +/-		< 9.0	3- 4	1839.0	804.0
3.7 +/- 0.	0.8	1.1 +/-	0.6	1.9 +/-		< 8.0	4- 5	1839.0	804.0
-a-	0.7	1.4 +/-	0.5	1.5 +/-		< 6.0	5 6	1839.0	804.0
-a-	0.8	2.0 +/-	0.6	1.8 +/-		< 9.0	6- 7	1839.0	804.0
-a-	0.7	1.1 +/-	0.5	1.2 +/-		<18.0	7- 8	1839.0	804.0
-a-	0.7	1.4 +/-	0.4	1.5 +/-		< 8.0	8- 9	1839.0	804.0
-a-	1.0	2.0 +/-	1.0	3.0 +/-		<13.0	9-10	1839.0	804.0
-a-	1.0	1.4 +/-	1.0	6.0 +/-	6.0	8.0 +/-	0- 1	1450.0	805.0
-a-	1.0	2.0 + / -	1.0	4.0 +/-	8.0	10.0 +/-	1- 2	1450.0	805.0
'-a-	0.8	2.2 +/-	0.5	1.7 +/-		<10.0	2- 3	1450.0	805.0

TABLE 5-5 (continued)

Page	2 11	of	15
1446		\sim $_{\rm L}$	

	t + / - 2 sigma	centration_(pCi/c	Con	Depth	linates	Coord
Thorium-23	Thorium-232	Radium-226	Uranium-238	(ft)	North	East
1.5 +/- 0.	1.1 +/- 0.7	1.3 +/- 0.7	< 5.0	3- 4	1450.0	805.0
1.3 +/- 0.	2.2 +/- 0.9	1.4 +/- 0.6	<11.0	4- 5	1450.0	805.0
-a-	1.3 +/- 0.8	0.8 +/- 0.5	< 7.0	5- 6	1450.0	805.0
-a-	1.7 + / - 0.7	1.4 +/- 0.5	< 4.0	6- 7	1450.0	805.0
-a-	0.9 +/- 0.6	1.5 +/- 0.4	< 6.0	7- 8	1450.0	805.0
-a-	5.0 +/- 2.0	3.0 +/- 2.0	<15.0	8- 9	1450.0	805.0
-a-	2.0 +/- 1.0	9.0 +/- 2.0	9.0 +/- 7.0	0- 1	1150.0	806.0
-a-	1.8 +/- 0.9	2.0 +/- 0.7	<13.0	1- 2	1150.0	806.0
3.1 +/- 0.	< 1.0	1.5 + / - 0.5	< 7.0	2- 3	1150.0	806.0
-a	1.7 + / - 0.7	1.7 +/- 0.6	< 4.0	3- 4	1150.0	806.0
1.1 + / - 0.	1.5 +/- 0.7	1.7 +/- 0.5	< 9.0	4-5	1150.0	806.0
-a-	1.5 +/- 0.7	1.4 +/- 0.5	< 6.0	5- 6	1150.0	806.0
-a-	1.7 +/- 0.7	1.7 +/- 0.6	< 9.0	6- 7	1150.0	806.0
-a-	1.6 +/- 0.6	1.2 +/- 0.4	< 4.0	7- 8	1150.0	806.0
-a-	1.7 +/- 0.8	1.4 +/- 0.5	< 9.0	8- 9	1150.0	806.0
-a-	1.5 +/- 0.7	1.3 +/- 0.6	< 7.0	9-10	1150.0	806.0
-a-	2.0 +/- 1.0	4.0 +/- 1.0	< .7.0	0- 1	1550.0	807.0
-a-	< 1.0	3.6 +/- 0.8	4.0 +/- 3.0	1- 2	1550.0	807.0
-a-	< 1.0	3.0 +/- 1.0	12.0 +/- 4.0	23	1550.0	807.0
1.2 + / - 0.	< 1.0	0.9 +/- 0.6	< 7.0	3- 4	1550.0	807.0
1.3 +/- 0.	2.2 +/- 0.8	0.9 +/- 0.4	< 8.0	4- 5	1550.0	807.0
-a-	1.0 + / - 0.7	1.8 +/- 0.5	< 6.0	5- 6	1550.0	807.0
-a-	2.7 + / - 0.9	1.5 +/- 0.5	< 8.0	6- 7	1550.0	807.0

Coord	dinates	Depth	Con	centration (pCi/	g +/- 2 sigma)	
East	North	(ft)	Uranium-238	Radium-226	Thorium-232	Thorium-230
807.0	1550.0	7- 8	< 4.0	1.1 +/- 0.4	1.0 +/- 0.6	-a-
807.0	1550.0	8- 9	< 5.0	1.2 +/- 0.5	< 1.0	-a-
852.0	1062.5	0- 1	<11.0	2.8 +/- 0.8	2.0 +/- 1.0	: -a-
852.0	1062.5	1- 2	< 4.0	1.2 +/- 0.6	1.1 +/- 0.8	-a-
852.0	1062.5	2- 3	< 9.0	1.8 +/- 0.5	1.9 +/- 0.7	1.1 + / - 0.4
852.0	1062.5	3- 4	< 7.0	1.3 +/- 0.5	1.3 +/- 0.8	-a-
852.0	1062.5	4- 5	< 9.0	1.4 +/- 0.5	2.1 +/- 0.7	1.6 +/- 1.2
852.0	1062.5	5- 6	< 6.0	1.4 +/- 0.7	1.4 +/- 1.0	-a-
852.0	1062.5	6- 7	< 8.0	1.1 +/- 0.6	1.5 +/- 1.0	-a -
852.0	1062.5	7-8	< 8.0	1.1 + / - 0.4	1.2 +/- 0.6	-a-
852.0	1062.5	8- 9	< 4.0	1.0 + - 0.5	< 1.0	-a-
852.0	1062.5	9-10	< 7.0	1.0 +/- 0.5	< 1.0	-a-
859.0	1500.0	0- 1	5.0 +/- 4.0	4.4 +/- 0.9	1.2 +/- 0.9	-a-
859.0	1500.0	1- 2	< 6.0	0.9 +/- 0.6	2.0 +/- 0.9	-a-
859.0	1500.0	2- 3	< 4.0	1.5 +/- 0.5	2.1 + / - 0.8	a-
859.0	1500.0	3- 4	<11.0	1.7 + / - 0.6	2.0 + / - 1.0	1.6 + / - 0.3
859.0	1500.0	4- 5	< 5.0	1.7 + / - 0.6	0.9 +/- 0.8	15.0 +/- 1.0
859.0	1500.0	5- 6	< 9.0	1.5 +/- 0.5	1.2 + / - 0.7	-a-
859.0	1500.0	6- 7	< 5.0	1.5 +/- 0.5	< 1.0	-a-
859.0	1500.0	7- 8	< 4.0	1.0 +/- 0.6	< 1.0	-a-
859.0	1500.0	8- 9	<11.0	1.6 +/- 0.6	3.0 +/- 1.0	-a-
859.0	1500.0	9-10	-b-	-b-	-b-	-b-
860.0	1400.0	0- 1	60.0 +/- 20.0	46.0 +/- 3.0	4.0 +/- 1.0	-a-

U

TABLE 5-5 (continued)

Page	12	Ωf	15
raue	13	OL	13

	gma)	+/- 2 si	ntration (pCi/g	Cor	Depth	linates	Coord
Thorium-230		Thorium	Radium-226	Uranium-238	(ft)	North	East
-a-	0.8	1.7.+/-	1.2 +/- 0.5	< 5.0	1- 2	1400.0	860.0
1.3 +/- 0.8	0.8	1.4 +/-	0.9 +/- 0.6	< 6.0	2- 3	1400.0	860.0
-a-	0.9	1.9 +/-	1.5 +/- 0.6	< 6.0	3- 4	1400.0	860.0
2.3 +/- 0.9	0.9	1.4 + / -	1.7 + / - 0.6	< 6.0	4- 5	1400.0	860.0
-a-	0.8	1.2 +/-	0.9 +/- 0.6	< 5.0	5- 6	1400.0	860.0
-a-	0.7	1.2 +/-	1.1 + / - 0.5	< 5.0	6- 7	1400.0	860.0
-a-	0.8	1.0 +/-	1.3 +/- 0.5	< 5.0	7-8	1400.0	860.0
-a-	0.7	1.2 +/-	1.0 +/- 0.5	< 5.0	8- 9	1400.0	860.0
-a-	0.7	1.5 +/-	1.2 +/- 0.5	< 5.0	9-10	1400.0	860.0
-a-	1.0	3.0 +/-	9.0 +/- 1.0	21.0 +/- 6.0	0- 1	1600.0	861.0
-a-	3.0	4.0 +/-	50.0 +/- 10.0	430.0 +/- 50.0	1- 2	1600.0	861.0
-a-	0.8	1.6 +/-	1.6 +/- 0.6	< 5.0	2- 3	1600.0	861.0
1.8 +/- 0.3	1.0	3.0 +/-	1.6 +/- 0.5	< 9.0	3- 4	1600.0	861.0
1.5 +/- 0.3	0.8	1.2 +/-	1.2 +/- 0.5	< 4.0	4- 5	1600.0	861.0
-a-	0.7	0.8 +/-	1.7 +/- 0.5	< 8.0	5- 6	1600.0	861.0
-a-	0.6	1.3 +/-	1.1 +/- 0.5	< 4.0	6- 7	1600.0	861.0
-a-	0.6	1.3 +/-	1.4 +/- 0.5	< 4.0	7-8	1600.0	861.0
-b-		-b-	-b-	- b-	8- 9	1600.0	861.0
-b-		-b-	-b-	-b-	9-10	1600.0	861.0
-a-	0.9	1.0 +/-	8.0 +/- 1.0	7.0 +/- 6.0	0- 1	1700.0	862.0
-a-	1.0	2.0 +/-	1.1 + / - 0.6	<11.0	1- 2	1700.0	862.0
-a-	0.7	0.8 +/-	1.1 + / - 0.5	< 4.0	2- 3	1700.0	862.0
3.5 +/- 1.7	0.7	1.3 +/-	1.5 +/- 0.5	< 8.0	3- 4	1700.0	862.0

Ç

TABLE 5-5 (continued)

Page	14	of	15
raue	17	$\mathbf{o}_{\mathbf{L}}$	

•						
		ncentration (pCi/c		Depth	linates	Coord
Thorium-230	Thorium-232	Radium-226	Uranium-238	(ft)	North	East
1.0 +/- 0.3	1.4 +/- 0.7	1.5 +/- 0.6	< 5.0	A 5	1700 0	062.0
	1.7 +/- 0.7			4-5	1700.0	862.0
-a-		1.5 +/- 0.5	< 9.0	5- 6	1700.0	862.0
-a-	1.7 +/- 0.8	1.4 +/- 0.5	< 4.0	6- 7	1700.0	862.0
-a-	0.8 +/- 0.7	1.0 +/- 0.4	< 8.0	7-8	1700.0	862.0
-a-	1.3 + - 0.6	1.3 + / - 0.5	< 4.0	8- 9	1700.0	862.0
-b-	-b-	-b-	-b-	9-10	1700.0	862.0
-a-	1.1 +/- 0.7	4.0 +/- 1.0	< 6.0	0- 1	1800.0	862.0
-a-	< 1.0	9.0 +/- 1.0	10.0 + / - 6.0	1- 2	1800.0	862.0
-a-	1.3 + / - 0.9	1.7 + / - 0.7	12.0 +/- 7.0	2- 3	1800.0	862.0
1.2 +/- 0.5	3.0 +/- 1.0	1.9 +/- 0.6	< 5.0	3- 4	1800.0	862.0
2.2 +/- 0.5	3.0 +/- 1.0	1.4 +/- 0.8	<11.0	4-5	1800.0	862.0
-a-	1.4 +/- 0.7	1.2 +/- 0.5	< 5.0	5- 6	1800.0	862.0
-a-	1.9 +/- 0.7	1.6 +/- 0.5	< 8.0	6- 7	1800.0	862.0
· -a-	1.3 + / - 0.7	1.9 +/- 0.5	< 4.0	7-8	1800.0	862.0
-a-	3.0 +/- 1.0	1.3 +/- 0.5	< 8.0	8- 9	1800.0	862.0
-a-	0.9 +/- 0.6	1.5 +/- 0.5	< 5.0	9-10	1800.0	862.0
-a-	2.0 +/- 1.0	2.2 +/- 0.7	<11.0	. 0- 1	1106.0	870.0
-a-	1.2 +/- 0.9	1.2 +/- 0.6	< 6.0	1- 2	1106.0	870.0
2.5 + / - 0.4	2.0 +/- 0.8	1.4 +/- 0.5	< 6.0	2- 3	1106.0	870.0
-a-	1.4 + / - 0.9	1.2 + / - 0.6	< 8.0	3- 4	1106.0	870.0
1.7 + /- 0.2	1.5 +/- 0.8	0.8 +/- 0.5	< 5.0	4 - 5	1106.0	870.0
-a-	2.0 +/- 1.0	2.0 +/- 1.0	<24.0	7- 8	1106.0	870.0
-a-	0.8 +/- 0.8	1.2 +/- 0.5	< 6.0	8- 9	1106.0	870.0
-	J. J. , J. O	3.2 , 3.3	• • • • • • • • • • • • • • • • • • • •	. • •	-2000	3.000

Ú

TABLE 5-5 (continued)

Page 15 of 15

Concentration (pCi/g +/- 2 sigma)					Coordinates Depth			
Thorium-23	-232	Thorium	6	Radium-22	Uranium-238	(ft)	North	East
-a-	0.3	1.6 +/-	0.5	0.9 +/-	< 4.0	9-10	1106.0	870.0
-a-	1.0	1.3 +/-	1.0	4.0 +/-	< 7.0	0- 1	1200.0	870.0
-a-	1.0	2.0 +/-	1.0	6.0 +/-	13.0 +/- 5.0	1- 2	1200.0	870.0
2.5 +/- 0.	0.9	1.1 +/-	0.6	1.1 +/-	< 6.0	2- 3	1200.0	870.0
-a-	0.7	1.9 +/-	0.5	1.4 +/-	< 5.0	3-4	1200.0	870.0
1.5 +/- 0.	0.8	1.9 +/-	0.6	1.7 +/-	<12.0	4-5	1200.0	870.0
-a-	0.9	1.2 +/-	0.6	1.7 +/-	< 7.0	5- 6	1200.0	870.0
-a-	1.0	3.0 +/-	0.5	1.3 +/-	<12.0	6- 7	1200.0	870.0
-a-	0.8	1.1 +/-	0.5	1.3 +/-	< 4.0	7-8	1200.0	870.0
-a-	0.8	2.2 +/-	0.5	1.0 +/-	< 6.0	8- 9	1200.0	870.0
-a-	1.0	2.0 +/-	0.7	1.6 +/-	<12.0	9-10	1200.0	870.0
-a-	1.0	1.8 +/-	0.6	1.1 +/-	< 8.0	0- 1	1300.0	872.0
-a-		< 1.0	0.5	0.7 +/-	< 8.0	1- 2	1300.0	872.0
4.1 +/- 0.	0.7	2.0 +/-	0.5	1.6 +/-	< 8.0	2- 3	1300.0	872.0
-a-	0.8	1.1 +/-	0.4	0.9 +/-	< 7.0	3- 4	1300.0	872.0
1.5 +/- 0.	0.9	2.8 +/-	0.5	1.5 +/-	< 9.0	4- 5	1300.0	872.0
a-		< 1.0	0.7	1.3.+/-	< 6.0	7-8	1300.0	872.0
-a-	0.9	2.5 +/-	0.5	1.2 +/-	<10.0	8- 9	1300.0	872.0
-a-		< 1.0	0.8	2.3 +/-	< 8.0	9-10	1300.0	872.0

⁻⁸⁻

 $(-1), \quad 1 = 1, \quad i = 4, \quad j$

Analysis not requested
No sample collected due to poor sample recovery -b-

REFERENCES

- 1. Oak Ridge National Laboratory. Radiological Survey of the Property at 9200 Latty Avenue, Hazelwood, Missouri, Oak Ridge, TN, September 1977.
- 2. Oak Ridge Associated Universities. Radiological Evaluation of Decontamination Debris Located at the Futura Chemical Company Facility, 9200 Latty Avenue, Hazelwood, Missouri, Oak Ridge, TN, September 1981.
- 3. Bechtel National, Inc. Radiological Protection Program Manual, Vol. I, Oak Ridge, TN, 1982.
- 4. Letter, John E. Baublitz, Jr. to E. L. Keller. "Guidelines for Residual Radioactivity at FUSRAP and Remote SFMP Sites" (Attachment: U.S. Department of Energy Guidelines for Residual Radioactivity at Formerly Utilized Sites Remedial Action Program and Remote Surplus Facilities Management Program Sites, Rev. 1, July 1985), July 22, 1985.
- Oak Ridge National Laboratory. Results of State Background Radiation Levels: Measurements Taken During 1975-1979, ORNL/TM-7343, Oak Ridge, TN, November 1981.

FUSRAP Document Management System

Year ID 00 3774			Further Info?
Operating Unit St. Louis Sites	Site HISS	Area hazelwood area	MARKS Number FN:1110-1-8100g
Primary Document Site Management	Туре	Secondary Document Type Federal, State, Local Technical	Recor
Subject or Title Characterization repo	ort for the Hazelwoo	d Interim Storage Site, Hazelwood	1, Missouri
Author/Originator		Company BNI	Date 6/1/1987
Recipient (s)		Company (-ies)	Version Final
Original's Location Central Files		Document Format paper	Confidential File?
Comments	Incl	ude in which AR(s)?	ETL
Comments	☑ N	lorth County	1.7
SAIC number		Madison	Filed in Volume
		Downtown	1
Bechtel ID	□ I	owa	
		a	